



**FOCUS LCDs**  
LCDs MADE SIMPLE®

Ph. 480-503-4295 | LCD@FocusLCDs.com

TFT | OLED | CHARACTER | GRAPHIC | UWVD | SEGMENT | CUSTOM

## TFT Display Module

Part Number

*E35RG13248LW6M250-RB*

### Overview:

- 3.5-inch TFT (55.50x84.96mm)
- 320x480 Pixels
- 8/9/16/18-Bit MCU, 3/4-SPI+16/18-Bit RGB
- Wide Temperature Range
- 6:00 Viewing Angle
- TN, Transmissive
- Resistive Touch Panel
- 180 NITS
- TFT IC: ILI9488
- OCA Bonding
- RoHS Compliant

## Description

This is a color active matrix TFT (Thin Film Transistor) LCD (Liquid Crystal Display) that uses amorphous silicon TFT as a switching device. This model is composed of a transmissive type TFT- LCD Panel, driver circuit, 4-wire resistive touch panel and backlight unit. The resolution of the 3.5" TFT- LCD contains 320x480 pixels and can display up to 65K/262K colors.

## Features

Input Voltage: 3.3V

TFT Interface: 8/9/16/18-Bit MCU, 3/4-SPI+16/18-Bit RGB


General Information Items	Specification	Unit	Note
	Main Panel		
TFT Display Area (AA)	48.96(H) x 73.44(V) (3.5 inch)	mm	--
Driver Element	TFT active matrix	--	--
Display Colors	65K/262K	colors	--
Number of Pixels	320(RGB)x480	dots	--
TFT Pixel Arrangement	RGB vertical stripe	--	--
Pixel Pitch	0.153 (H) x 0.153 (V)	mm	--
Viewing Angle	6:00	o'clock	--
TFT Controller IC	ILI9488	--	--
Display Mode	Transmissive/Normally White	--	--
Operating Temperature	-20 to +70	°C	--
Storage Temperature	-30 to +80	°C	--

## Mechanical Information

Item		Min.	Typ.	Max.	Unit	Note
Module Size	Horizontal (H)	--	55.50	--	mm	--
	Vertical (V)	--	84.96	--	mm	--
	Depth (D)	--	5.04	--	mm	--
Weight		--	40	--	g	Approximate



## 2. Block Diagram

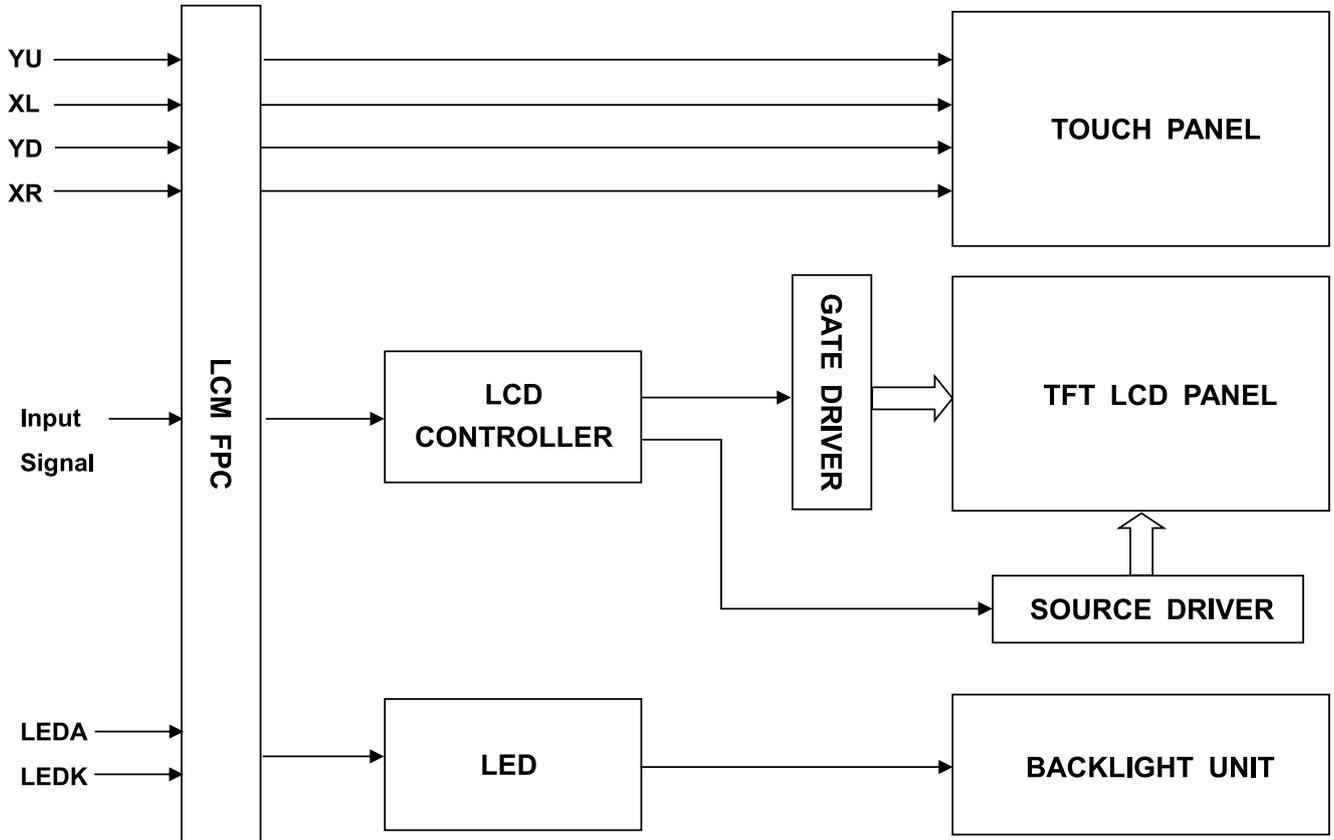

### 3. Input Terminal Pin Assignment

#### 3.1 TFT Pin Assignment

Recommended TFT Connector: FH12S-50S-0.5SH(55)

NO.	Symbol	Description	I/O
1	GND	Ground.	P
2	LEDA	Anode pin of backlight.	P
3	LEDK1	Cathode pin of backlight.	P
4	LEDK2	Cathode pin of backlight.	P
5	LEDK3	Cathode pin of backlight.	P
6	LEDK4	Cathode pin of backlight.	P
7	LEDK5	Cathode pin of backlight.	P
8	LEDK6	Cathode pin of backlight.	P
9	GND	Ground.	P
10	GND	Ground.	P
11	VCC	Supply voltage (3.3V).	P
12	VCC	Supply voltage (3.3V).	P
13	RESET	This signal will reset the device and must be applied to properly initialize the chip.	I
14	CSX	Chip select input pin ("Low" enable). Fix this pin at VCC or GND when not in use.	I
15	RS	This pin is used to select "Data or Command" in the parallel interface. When D/CX = '1', data is selected. When D/CX = '0', command is selected. This pin is used serial interface clock in 4-wire 8-bit serial data.	I
16	WRX(SPI-SCL)	DBI Type B: WRX pin, serves as a write signal. DBI Type C: SCL pin as Serial Clock when operating in the serial interface. Fix this pin at VCC or GND when not in use.	I
17	RDX	DBI Type B: serve as a read signal. Fix this pin at VCC when not in use.	I
18	SPI-SDA	DIN/SDA: serial data input/output bi-direction pin. Fix to GND level when not in use.	I
19	SDO	SPI interface output pin. - The data is output on the falling edge of the SCL signal. - If not used, leave this pin open.	O
20	DB0/B0,LSb	Blue data input.	I/O
21	DB01/B1	Blue data input.	I/O
22	DB02/B2	Blue data input.	I/O
23	DB03/B3	Blue data input.	I/O
24	DB04/B4	Blue data input.	I/O
25	DB05/B5,MSb	Blue data input.	I/O
26	DB06/G0,LSb	Green data input.	I/O
27	DB07/G1	Green data input.	I/O
28	DB08/G2	Green data input.	I/O
29	DB09/G3	Green data input.	I/O
30	DB10/G4	Green data input.	I/O

31	DB11/G5,MSb	Green data input.	I/O
32	DB12/R0,LSb	Red data input.	I/O
33	DB13/R1	Red data input.	I/O
34	DB14/R2	Red data input.	I/O
35	DB15/R3	Red data input.	I/O
36	DB16/R4	Red data input.	I/O
37	DB17/R5, MSb	Red data input.	I/O
38	DE	Data enable signal for RGB interface.	I
39	PCLK	Dot clock signal for RGB interface operation. Fix this pin at VCC or GND when not in use.	I
40	HSYNC	Line synchronizing signal for RGB interface operation. Fix this pin at VCC or GND when not in use.	I
41	VSYNC	Frame synchronizing signal for RGB interface operation. Fix this pin at VCC or GND when not in use.	I
42	IM2	MPU parallel interface bus and serial interface select. If using RGB interface, you must select serial interface. Fix this pin at VCC and GND when not in use.	I
43	IM1		
44	IM0		
45	GND	Ground.	P
46	YU(NC)	Touch panel top film terminal.	A/D
47	XL(NC)	Touch panel left glass terminal.	A/D
48	YD(NC)	Touch panel bottom film terminal.	A/D
49	XR(NC)	Touch panel right glass terminal.	A/D
50	GND	Ground.	P

*I: Input, O: Output, P: Power*

## 4. LCD Optical Characteristics

### 4.1 Optical Specifications

Item		Symbol	Condition	Min	Typ.	Max	Unit	Note
Color Gamut		S(%)		--	70	--	%	(5)
Transmittance		T%		--	6.0	--	%	
Contrast Ratio		CR		800	1000	--	%	(2)
Response Time	Rising	TR	$\theta=0$ Normal viewing angle	--	35	40	ms	(4)
	Falling	TF						
Color Filter Chromaticity	White	WX		0.2520	0.2920	0.3320		(5)(6)
		WY		0.2710	0.3110	0.3510		
	Red	RX		0.6188	0.6588	0.6988		
		RY		0.3170	0.3570	0.3970		
	Green	GX		0.2930	0.3330	0.3730		
		GY		0.5380	0.5780	0.6180		
	Blue	BX		0.1110	0.1510	0.1910		
		BY		0.0310	0.0710	0.1110		
Viewing Angle	Hor.	$\Theta$ L	CR>10	--	85	--	degree	(1)(6)
		$\Theta$ R		--	85	--		
	Ver.	$\Theta$ T		--	85	--		
		$\Theta$ B		--	85	--		
Option View Direction				6:00				(1)


#### Measuring Conditions:

1. Dark Room
2. Ambient Temperature of  $25\pm 2^{\circ}\text{C}$
3. 15 Minute Warm up

## Optical Specification Reference Notes:

### (1) Definition of Viewing Angle:

The viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3,9 o'clock direction and the vertical or 6,12 o'clock direction with respect to the optical axis which is normal to the LCD surface.

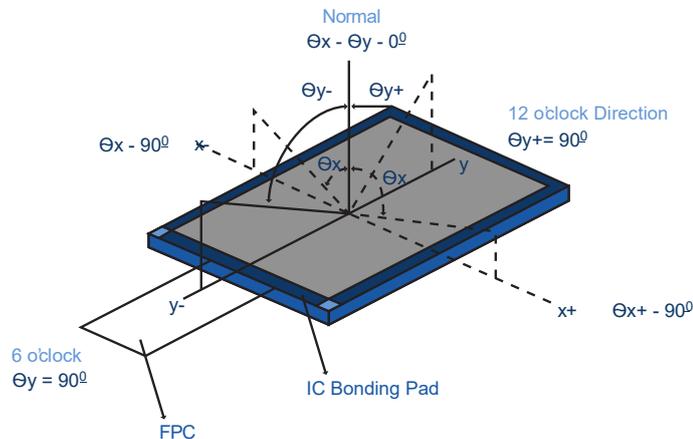

### (2) Definition of Contrast Ratio:

Measured at the center point of panel. The contrast ratio (Cr) measured on a module, is the ratio between the luminance (Lw) in a full white area (R=G=B=1) and the luminance (Ld) in a dark area (R=G=B=0).

$$Cr = \frac{Lw}{Ld}$$


### (3) Definition of Transmittance (T%):

The transmittance of the panel including the polarizers is measured with electrical driving. The equation for transmittance Tr is:

$$Tr = \frac{I_t}{I_o} \times 100\%$$


$I_o$  = the brightness of the light source.

$I_t$  = the brightness after panel transmission

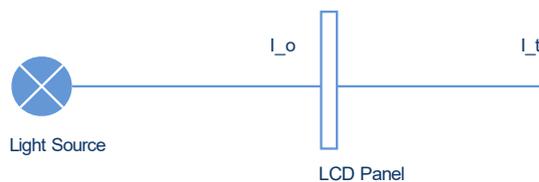

### (4) Definition of Response Time (T<sub>R</sub>, T<sub>F</sub>):

The rise time 'Tr' is defined as the time for luminance to change from 90% to 10% as a result of a change of the electrical condition. The fall time 'Tf' is defined as the time for luminance to change from 10% to 90% as a result of a change of the electrical condition.

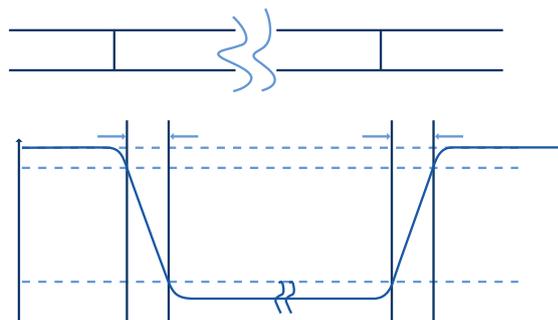

### (5) Definition of Color Gamut:

Measuring machine CFT-01. NTSC's Primaries: R(x,y,Y),G(x,y,Y), B(x,y,Y). FPM520 of Westar Display Technologies, INC., which utilized SR-3 for Chromaticity and BM-5A for other optical characteristics. The color chromaticity shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.


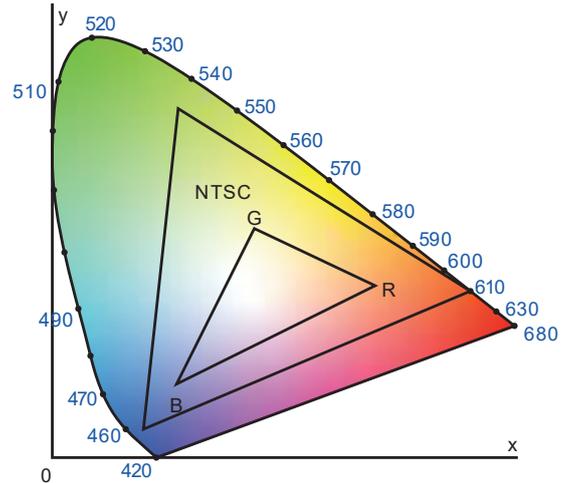


Fig. 1931 CIE Chromaticity Diagram

$$\text{Color Gamut: } S = \frac{\text{Area of RGB Triangle}}{\text{Area of NTSC Triangle}} \times 100\%$$

### (6) Definition of Optical Measurement Setup:

The LCD module should be stabilized at a given temperature for 20 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting backlight for 20 minutes.

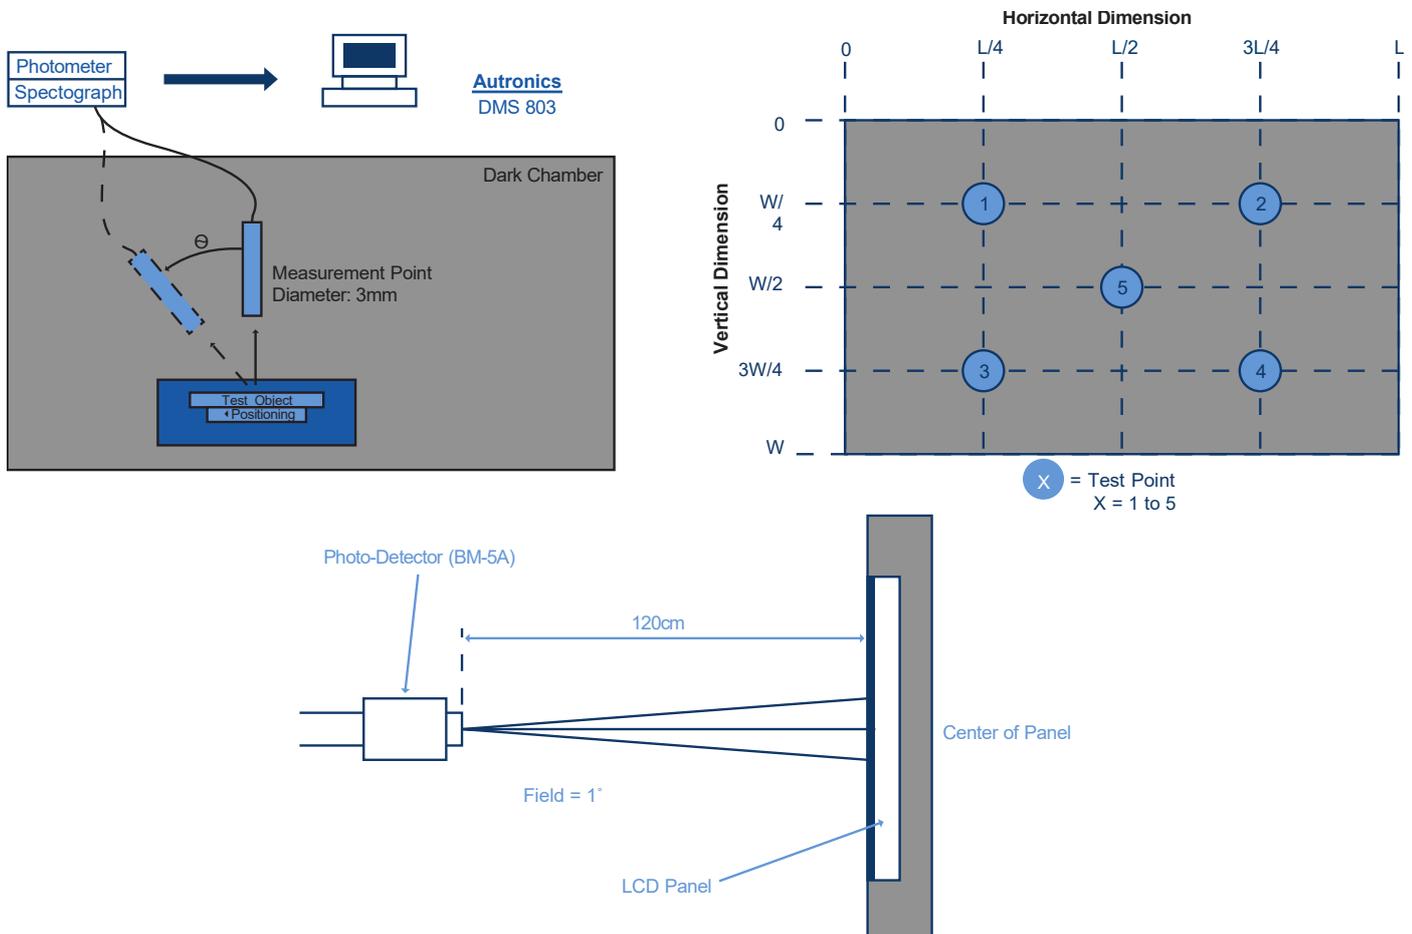

## 5. TFT Electrical Characteristics

### 5.1 Absolute Maximum Rating (Ta=25°C, VSS=0V)

Characteristics	Symbol	Min	Max	Unit
Digital Supply Voltage	VCC	-0.3	4.6	V
Operating Temperature	TOP	-20	+70	°C
Storage Temperature	TST	-30	+80	°C

*NOTE: If the absolute maximum rating of the above parameters is exceeded, even momentarily, the quality of the product may be degraded. Absolute maximum ratings specify the values which the product may be physically damaged if exceeded. Be sure to use the product within the range of the absolute maximum ratings.*

### 5.2 DC Electrical Characteristics

Characteristics	Symbol	Min	Typ.	Max	Unit	Note
Digital Supply Voltage	VCC	2.5	2.8	3.3	V	--
Normal Mode Current Consumption	IDD	--	6	11	mA	--
Level Input Voltage	V <sub>IH</sub>	0.7*VCC	--	VCC	V	--
	V <sub>IL</sub>	GND	--	0.3*VCC	V	--
Level Output Voltage	V <sub>OH</sub>	0.8*VCC	--	VCC	V	--
	V <sub>OL</sub>	GND	--	0.2*VCC	V	--


### 5.3 LED Backlight Characteristics

The backlight system is edge lighting type with 6 LED Chips

Item	Symbol	Min	Typ.	Max	Unit	Note
Forward Current	$I_F$	80	90	--	mA	--
Forward Voltage	$V_F$	2.8	3.2	3.4	V	--
LCM Luminance	$L_v$	--	180	--	cd/m <sup>2</sup>	(3) $I_F=90mA$
LED Lifetime	Hr	--	50000	--	hour	(1)(2)
Uniformity	Avg	80	--	--	%	(3)


**Note 1:** LED lifetime (Hr) can be defined as the time in which it continues to operate under the condition:  $T_a=25 \pm 3^\circ C$ , typical IL value indicated in the above table until the brightness becomes less than 50%.

**Note 2:** The "LED lifetime" is defined as the module brightness decrease to 50% original brightness at  $T_a=25^\circ C$  and  $I_F = 90mA$ . The LED lifetime could be decreased if operating  $I_F$  is larger than 90mA. The constant current driving method is suggested.

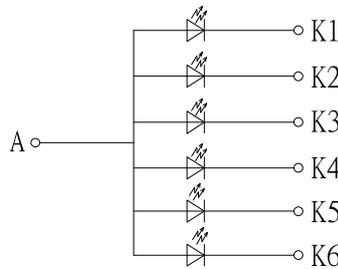

**BL CIRCUIT DIAGRAM**

**Note 3:** Luminance Uniformity of these 9 points is defined as below:

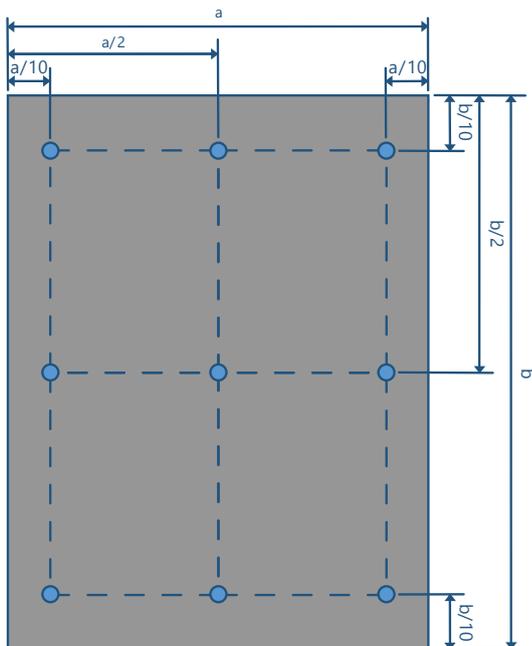

$$\text{Luminance} = \frac{(\text{Total Luminance of 9 Points})}{9}$$

$$\text{Uniformity} = \frac{\text{Minimum Luminance in 9 Points (1-9)}}{\text{Maximum Luminance in 9 Points (1-9)}}$$

## 6. TFT AC Characteristics

### 6.1 High Speed Data Transmission: Data-Clock Timing

For high-speed data transmission data-clock timing diagrams and tables, see table and diagram on page 330 of the data sheet for controller IC ILI9488. The data sheet can be found here:

<https://focuslcds.com/wp-content/uploads/Drivers/ILI9488.pdf>

### 6.2 High Speed Data Transmission

For high-speed data transmission timings diagrams and tables, see diagram and table on page 331 of the data sheet for controller IC ILI9488. The data sheet can be found here:

<https://focuslcds.com/wp-content/uploads/Drivers/ILI9488.pdf>

### 6.3 Turnaround Procedure

For turnaround procedure diagrams and tables, see page 331 of the data sheet for controller IC ILI9488. The data sheet can be found here: <https://focuslcds.com/wp-content/uploads/Drivers/ILI9488.pdf>

### 6.4 Switching the Clock Lane Between Clock Transmission and Low-Power Mode

For switching the clock lane between clock transmission and low-power mode tables and diagrams, see page 334 of the data sheet for controller IC ILI9488. The data sheet can be found here:

<https://focuslcds.com/wp-content/uploads/Drivers/ILI9488.pdf>

### 6.5 Reset Timing Characteristics

For the reset timing characteristics diagrams and tables, see table and diagram on page 305 of the data sheet for controller IC ILI9488. The data sheet can be found here:

<https://focuslcds.com/wp-content/uploads/Drivers/ILI9488.pdf>

## 7. Quality Inspection Standards

For TFT quality inspection standards, please see the following link: <https://focuslcds.com/lcd-resources/tft-quality-inspection-standards/>

## **8. Cautions and Handling Precautions**

### **8.1 Handling and Operating the Module**

1. When the module is assembled, it should be attached to the system firmly. Do not warp or twist the module during assembly work.
2. Protect the module from physical shock or any force. In addition to damage, this may cause improper operation or damage to the module and back-light unit.
3. Note that polarizer is very fragile and could be easily damaged. Do not press or scratch the surface.
4. Do not allow drops of water or chemicals to remain on the display surface. If you have the droplets for a long time, staining and discoloration may occur.
5. If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.
6. The desirable cleaners are water, IPA (Isopropyl Alcohol) or Hexane. Do not use ketene type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
7. If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, legs, or clothes, it must be washed away thoroughly with soap.
8. Protect the module from static; it may cause damage to the CMOS ICs.
9. Use fingerstalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
10. Do not disassemble the module.
11. Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
12. Pins of I/F connector shall not be touched directly with bare hands.
13. Do not connect, disconnect the module in the "Power ON" condition.
14. Power supply should always be turned on/off by the item Power On Sequence & Power Off Sequence.

### **8.2 Storage and Transportation**

1. Do not leave the panel in high temperature, and high humidity for a long time. It is highly recommended to store the module with temperature from 0 to 35 °C and relative humidity of less than 70%.
2. Do not store the TFT-LCD module in direct sunlight.
3. The module shall be stored in a dark place. When storing the modules for a long time, be sure to adopt effective measures for protecting the modules from strong ultraviolet radiation, sunlight, or fluorescent light.
4. It is recommended that the modules should be stored under a condition where no condensation is allowed. Formation of dewdrops may cause an abnormal operation or a failure of the module. In particular, the greatest possible care should be taken to prevent any module from being operated where condensation has occurred inside.
5. This panel has its circuitry FPC on the bottom side and should be handled carefully in order not to be stressed.