

NV3047E Datasheet

720x544 System-On-Chip Driver
For 480RGB x 272 TFT LCD

Version 1.1
Dec, 2021

1. General Description.....	1
2. Features	2
3. Pad arrangement	3
3.1. Output Bump Dimension	3
3.2. Bump Dimension	4
3.3. Alignment Mark Dimension.....	5
3.4. Pad Coordinates	6
4. Block Diagram	17
5. Pin Description	18
6. 3-Wire serial interface	21
7. Register list.....	22
7.1. Register Summary.....	22
7.2. Algorithm	25
7.2.1. Global Contrast Settings (04h).....	25
7.2.2. Sub-R Contrast Settings (05h).....	26
7.2.3. Sub-B Contrast Settings (06h).....	27
7.2.4. Global Brightness Settings (07h)	28
7.2.5. Sub-R Brightness Settings (08h).....	29
7.2.6. Sub-B Brightness Settings (09h).....	30
7.3. OTP Control Setting.....	31
7.3.1. OTP Control (10h)	31
7.3.2. OTP Address (11h)	32
7.3.3. OTP Write Data (12h).....	33
7.3.4. SPI Read OTP Data (13h).....	34
7.4. Interface Type and Blanking Porch Control	35
7.4.1. Interface Type and Polar setting (21h).....	35
7.4.2. Blanking Porch Control 1 (22h~26h).....	36
7.4.3. Blanking Porch Control 2 (27h~2Bh)	37
7.5. Power Trimming	38
7.5.1. IBAS Adjustment (30h)	38
7.5.2. IBIAS and VCC trimming (31h).....	39
7.5.3. LVD and VDDS Trimming (32h).....	40
7.5.4. GVCL Adjustment (38h).....	41
7.5.5. GVDD Adjustment (39h).....	42
7.5.6. VGSP Adjustment (3Ah)	43
7.6. Gate Setting.....	44
7.6.1. Gate Switch Setting (40h)	44
7.6.2. Gate Start Enable Setting (41h).....	45
7.6.3. Gate End Enable Setting (43h).....	46
7.7. Source Ctrl Setting	47
7.7.1. Source Load Setting 1 (50h)	47
7.7.2. Source Load Setting 2 (51h)	48
7.7.3. Source Load Setting 3 (52h)	49
7.7.4. Source Load Setting 4 (53h)	50
7.7.5. Source Load Setting 5 (54h)	51
7.7.6. Source Charging Setting 1 (55h).....	52
7.7.7. Source Charging Setting 2 (56h).....	53
7.7.8. Source Charging Setting 3 (57h).....	54
7.7.9. Source Charging Setting 4 (58h).....	55
7.7.10. Source Setting 1 (59h).....	56
7.7.11. Source Setting 2 (5Ah).....	57
7.7.12. Source Setting 3 (5Bh).....	58
7.7.13. Source Setting 4 (5Eh)	59
7.8. Gamma P Selection (60h~72h)	60
7.9. Gamma N Selection (73h~85h).....	61
7.10. Pump control.....	62

7.10.1. AVDD Control (90h)	62
7.10.2. AVCL Control (91h)	63
7.10.3. VGH Control (92h)	64
7.10.4. VGL Control (93h)	65
7.10.5. HV Pump Control (94h)	66
7.10.6. ESD Function (95h)	67
7.11. Display Control	68
7.11.1. Panel Scan Control (A0h)	68
7.11.2. Dual Gate Switch Control (A1h)	69
7.11.3. DPI Serial 8 bit Mux (A2h)	70
7.12. Read Register	71
7.12.1. Read Chip ID1 (DAh)	71
7.12.2. Read Chip ID2 (DBh)	72
7.12.3. Read Chip ID3 (DCh)	73
8. Electrical specifications	74
8.1 Absolute Maximum Ratings	74
8.2. DC Characteristics	75
8.2.1. Recommended Operating Range	75
8.2.2. DC Characteristics for Digital Circuit	76
8.2.3. DC Characteristics for Analog Circuit	77
8.3. AC Characteristics	78
8.4. AC Timing Diagram	79
8.4.1. Clock and Data Input Timing Diagram	79
8.4.2. 3-Wire Communication Timing Diagram	79
9. INPUT DATA FORMAT	80
9.1. RGB Input Timing Table	80
9.1.1. Parallel 24-bit RGB Timing Table	80
9.1.2. Serial 8-bit RGB Timing Table	81
9.2. SYNC Mode Timing Diagram	82
9.3. SYNC-DE Mode Timing Diagram	83
10. Input color format application circuit	84
10.1. 16.7M Input Color Format	84
10.2. 262K Input Color Format	84
10.3. 65K Input Color Format	84
10.4. 4K Input Color Format	85
11. FPC Application circuit	86
11.1. Parallel RGB SYNC-DE Mode Reference Circuit	86
11.2. Parallel RGB SYNC Mode Reference Circuit	86
11.3. Parallel RGB DE Mode Reference Circuit	86
11.4. Serial RGB SYNC-DE Mode Reference Circuit	87
11.5. Serial RGB SYNC Mode Reference Circuit	87
11.6. Serial RGB DE Mode Reference Circuit	87
12. Power on/off sequence	88
12.1. Power On Sequence	88
12.2. Power Off Sequence	89
13. OTP Flow	90
14. Recommended panel routing resistance	92
15. Revision history	98

1. General Description


NV3047E offers all-in-one chip solution of 480RGBx272 for color TFT-LCD panel. This chip incorporated with digital timing generator, source and gate driver, power supply circuit, PWM control circuit and embedded serial communication interface for function setting. The source output support real 8-bit resolution and 256-gray scale with small output deviation are designed to support higher color resolution. The power supply circuit incorporated with step-up circuit, regulators and operational amplifiers to generate power supply voltages to drive TFT LCD.

2. Features

- ◆ Display resolution options:
 - 480(RGB) (H) X 272 (V)
- ◆ LCD Driver Output Circuits
 - Source Outputs: 720 Channels
 - Gate Outputs: 544 Channels
 - Common Electrode Output
- ◆ 256 gray scale with true 8 bit DAC
- ◆ Support SYNC, DE and SYNC-DE mode RGB interface input timing
- ◆ Support 8-bit serial and 24-bit parallel RGB interface
- ◆ Support 3-wire Serial Peripheral Interface to config and control display
- ◆ On Chip Build-In Circuits
 - DC/DC Converter
 - Non-Volatile (NV) Memory to store initial Register setting and factory default value
 - Timing Controller
- ◆ Wide Supply Voltage Range
 - I/O Voltage (VDDI to DGND): 1.65V ~ VDD
 - Analog Voltage (VDD to AGND): 3.0V ~ 3.6V
 - Charge pump Voltage (PVDD to PGND): 3.0V ~ 3.6V
- ◆ On-Chip Power System
 - GVDD: +4.9600V ~ +5.9680V
 - GVCL: -4.5920V ~ -2.9600V
 - Gate driver HIGH level (VGH to AGND): +13V ~ +16V
 - Gate driver LOW level (VGL to AGND): -10V ~ -7V
- ◆ Optimized layout for COG Assembly


3. Pad arrangement

3.1. Output Bump Dimension

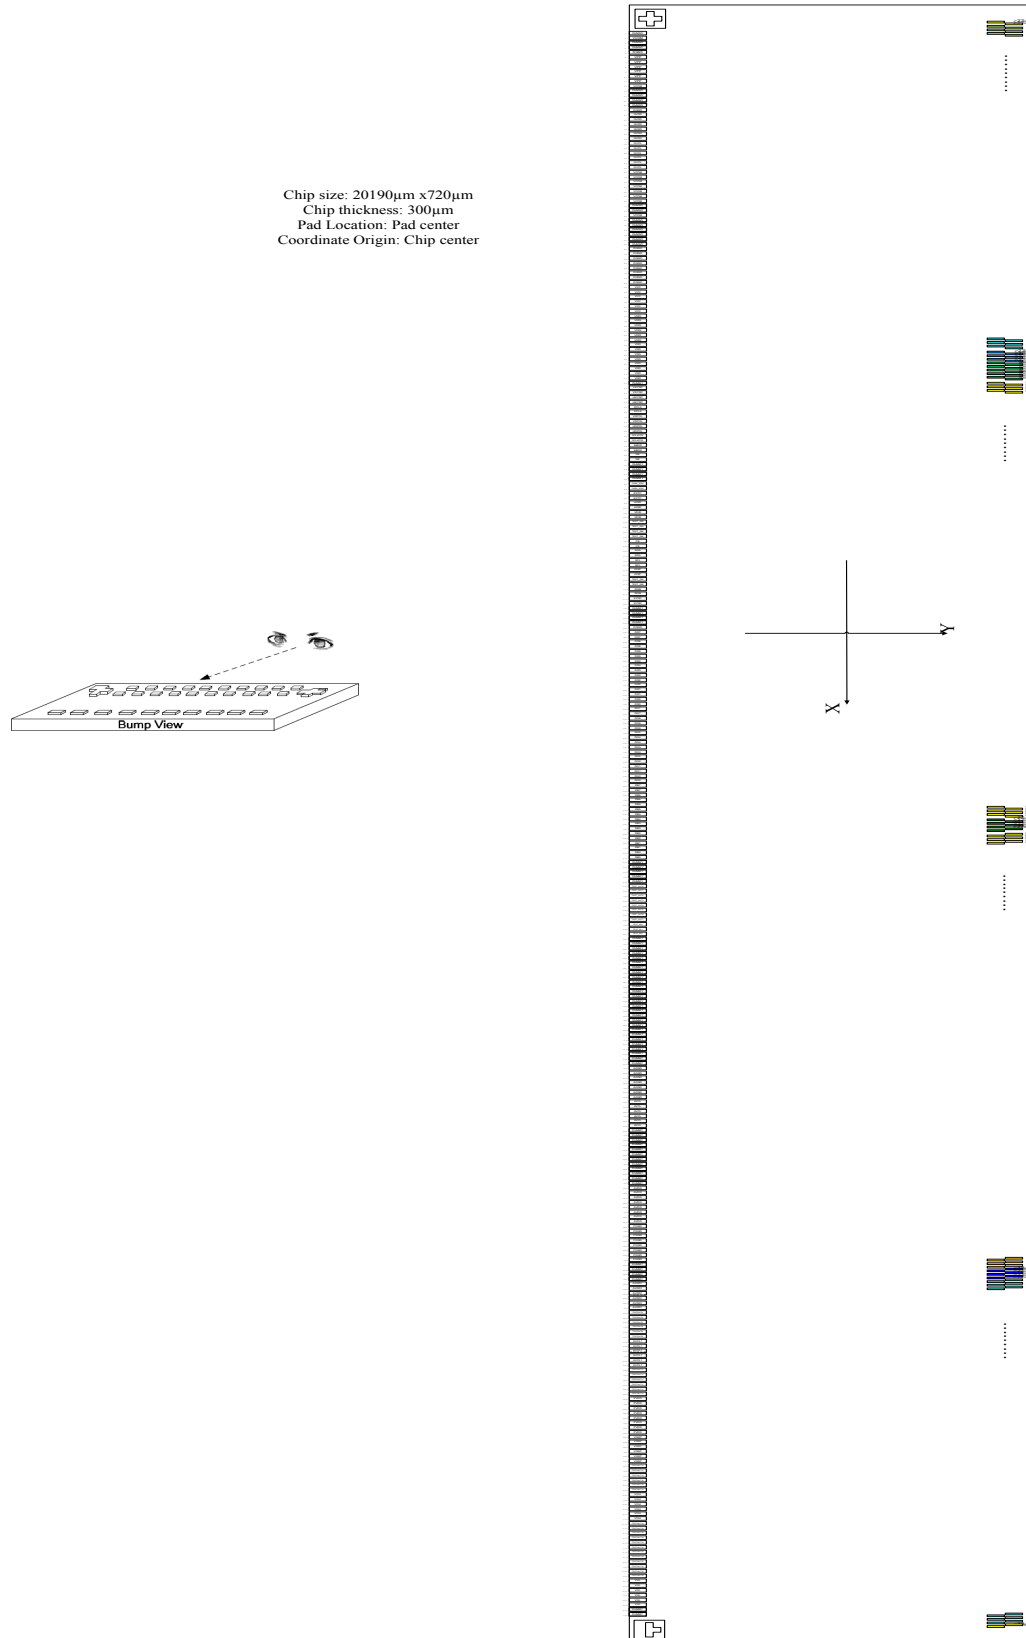


3.2. Bump Dimension

Output Pin: S1~S720、G1~G544、VCOM、DUMMY (Pin 332-1628)

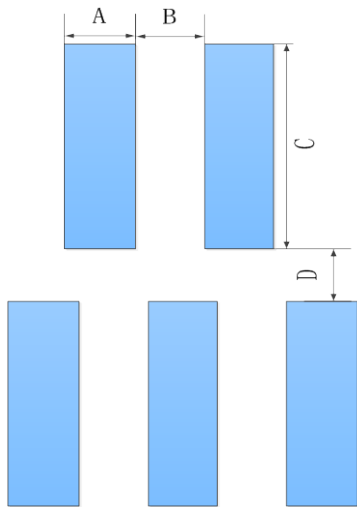

Symbol	Item	Size
A	Bump Width	15um
B	Bump Gap 1 (Horizontal)	15um, 30um, 75um
C	Bump Height	100um
D	Bump Gap 2 (Vertical)	30um


Input Pin: Pin 1-331

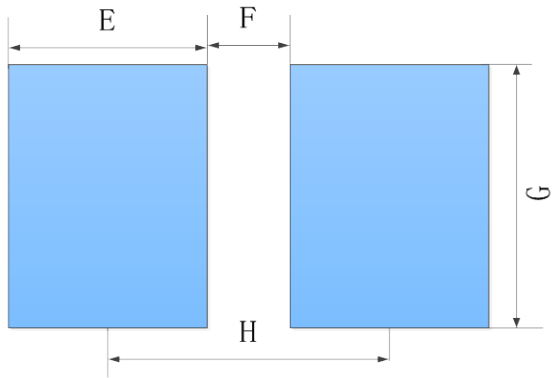


Symbol	Item	Size
E	Bump Width	35um
F	Bump Gap	24um
G	Bump Height	100um
H	Bump Pitch	59um

3.3. Alignment Mark Dimension

Alignment Mark: A1(X,Y)=(-9963,-235)

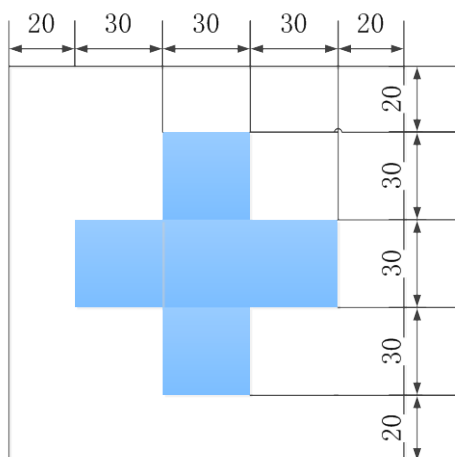

Alignment Mark: A2(X,Y)=(+9963,+235)

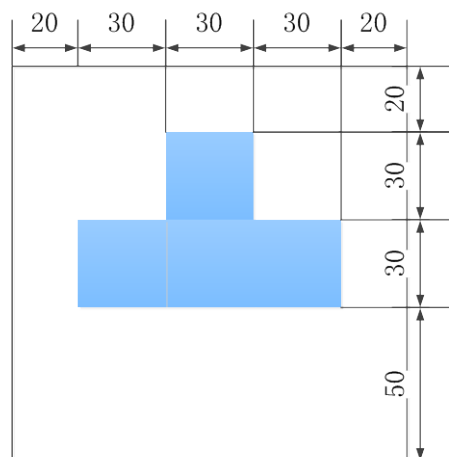

3.4. Pad Coordinates

NO.	Pin Name	X	Y
1	DUMMY	-9735	-257
2	VCOM	-9676	-257
3	DUMMY	-9617	-257
4	DUMMY	-9558	-257
5	DGND	-9499	-257
6	VPP	-9440	-257
7	VPP	-9381	-257
8	VPP	-9322	-257
9	VPP	-9263	-257
10	VPP	-9204	-257
11	VPP	-9145	-257
12	VCOM	-9086	-257
13	DUMMY	-9027	-257
14	DUMMY	-8968	-257
15	DUMMY	-8909	-257
16	DUMMY	-8850	-257
17	DGND	-8791	-257
18	GVDD	-8732	-257
19	GVDD	-8673	-257
20	GVDD	-8614	-257
21	GVDD	-8555	-257
22	GVDD	-8496	-257
23	GVDD	-8437	-257
24	GVCL	-8378	-257
25	GVCL	-8319	-257
26	GVCL	-8260	-257
27	GVCL	-8201	-257
28	GVCL	-8142	-257
29	GVCL	-8083	-257
30	VCOM	-8024	-257
31	VCOM	-7965	-257
32	VCOM	-7906	-257
33	VCOM	-7847	-257
34	VCOM	-7788	-257
35	VCOM	-7729	-257
36	VCOM	-7670	-257
37	DUMMY	-7611	-257
38	DUMMY	-7552	-257
39	VCOM	-7493	-257
40	DUMMY	-7434	-257
41	DUMMY	-7375	-257
42	DUMMY	-7316	-257
43	DUMMY	-7257	-257
44	DUMMY	-7198	-257
45	DUMMY	-7139	-257
46	DGND	-7080	-257
47	DGND	-7021	-257
48	DGND	-6962	-257
49	PGND	-6903	-257
50	PGND	-6844	-257
51	PGND	-6785	-257
52	PGND	-6726	-257
53	PGND	-6667	-257

NO.	Pin Name	X	Y
54	VCC	-6608	-257
55	VCC	-6549	-257
56	VCC	-6490	-257
57	VCC	-6431	-257
58	VCC	-6372	-257
59	VCC	-6313	-257
60	VDDI	-6254	-257
61	VDDI	-6195	-257
62	VDDI	-6136	-257
63	VDDI	-6077	-257
64	VDDI	-6018	-257
65	VDDI	-5959	-257
66	PVDD	-5900	-257
67	PVDD	-5841	-257
68	PVDD	-5782	-257
69	PVDD	-5723	-257
70	PVDD	-5664	-257
71	VDD	-5605	-257
72	VDD	-5546	-257
73	VDD	-5487	-257
74	DUMMY	-5428	-257
75	VSYNC	-5369	-257
76	VSYNC	-5310	-257
77	HSYNC	-5251	-257
78	HSYNC	-5192	-257
79	DCLK	-5133	-257
80	DCLK	-5074	-257
81	VDPOL	-5015	-257
82	VDPOL	-4956	-257
83	HDPOL	-4897	-257
84	HDPOL	-4838	-257
85	DCLKPOL	-4779	-257
86	DCLKPOL	-4720	-257
87	SBGR	-4661	-257
88	SBGR	-4602	-257
89	DE	-4543	-257
90	DE	-4484	-257
91	DUMMY	-4425	-257
92	DUMMY	-4366	-257
93	DUMMY	-4307	-257
94	DUMMY	-4248	-257
95	PARA_SERI	-4189	-257
96	PARA_SERI	-4130	-257
97	EXTC	-4071	-257
98	EXTC	-4012	-257
99	HDIR	-3953	-257
100	HDIR	-3894	-257
101	VDIR	-3835	-257
102	VDIR	-3776	-257
103	TEST_IN3	-3717	-257
104	TEST_IN3	-3658	-257
105	TEST_IN4	-3599	-257
106	TEST_IN4	-3540	-257

NO.	Pin Name	X	Y
107	CS	-3481	-257
108	CS	-3422	-257
109	SDA	-3363	-257
110	SDA	-3304	-257
111	SCL	-3245	-257
112	SCL	-3186	-257
113	DISP	-3127	-257
114	DISP	-3068	-257
115	TEST_IN5	-3009	-257
116	TEST_IN5	-2950	-257
117	GRB	-2891	-257
118	GRB	-2832	-257
119	SYNC	-2773	-257
120	SYNC	-2714	-257
121	DUMMY	-2655	-257
122	DUMMY	-2596	-257
123	DUMMY	-2537	-257
124	DUMMY	-2478	-257
125	DGND	-2419	-257
126	DR7	-2360	-257
127	DR7	-2301	-257
128	DR6	-2242	-257
129	DR6	-2183	-257
130	DR5	-2124	-257
131	DR5	-2065	-257
132	DR4	-2006	-257
133	DR4	-1947	-257
134	DR3	-1888	-257
135	DR3	-1829	-257
136	DR2	-1770	-257
137	DR2	-1711	-257
138	DR1	-1652	-257
139	DR1	-1593	-257
140	DR0	-1534	-257
141	DR0	-1475	-257
142	DG7	-1416	-257
143	DG7	-1357	-257
144	DG6	-1298	-257
145	DG6	-1239	-257
146	DG5	-1180	-257
147	DG5	-1121	-257
148	DG4	-1062	-257
149	DG4	-1003	-257
150	DG3	-944	-257
151	DG3	-885	-257
152	DG2	-826	-257
153	DG2	-767	-257
154	DG1	-708	-257
155	DG1	-649	-257
156	DG0	-590	-257
157	DG0	-531	-257
158	DB7	-472	-257
159	DB7	-413	-257

NV3047E—480(RGB) x272 TFT LCD Single-Chip Driver

NO.	Pin Name	X	Y
160	DB6	-354	-257
161	DB6	-295	-257
162	DB5	-236	-257
163	DB5	-177	-257
164	DB4	-118	-257
165	DB4	-59	-257
166	DB3	0	-257
167	DB3	59	-257
168	DB2	118	-257
169	DB2	177	-257
170	DB1	236	-257
171	DB1	295	-257
172	DB0	354	-257
173	DB0	413	-257
174	DUMMY	472	-257
175	DUMMY	531	-257
176	DUMMY	590	-257
177	DUMMY	649	-257
178	DUMMY	708	-257
179	TESTOUT0	767	-257
180	TESTOUT1	826	-257
181	TESTOUT2	885	-257
182	TESTOUT3	944	-257
183	TESTOUT4	1003	-257
184	TESTOUT5	1062	-257
185	TESTOUT6	1121	-257
186	TESTOUT7	1180	-257
187	TEST_IN0	1239	-257
188	TEST_IN1	1298	-257
189	TEST_IN2	1357	-257
190	DUMMY	1416	-257
191	DUMMY	1475	-257
192	DUMMY	1534	-257
193	DUMMY	1593	-257
194	DUMMY	1652	-257
195	DUMMY	1711	-257
196	DUMMY	1770	-257
197	DUMMY	1829	-257
198	DUMMY	1888	-257
199	DUMMY	1947	-257
200	DUMMY	2006	-257
201	DUMMY	2065	-257
202	DUMMY	2124	-257
203	DUMMY	2183	-257
204	DUMMY	2242	-257
205	DUMMY	2301	-257
206	DUMMY	2360	-257
207	DUMMY	2419	-257
208	DUMMY	2478	-257
209	DUMMY	2537	-257
210	DUMMY	2596	-257
211	DUMMY	2655	-257
212	DUMMY	2714	-257
213	DUMMY	2773	-257
214	DUMMY	2832	-257

NO.	Pin Name	X	Y
215	DUMMY	2891	-257
216	DUMMY	2950	-257
217	AGND	3009	-257
218	AGND	3068	-257
219	AGND	3127	-257
220	AGND	3186	-257
221	AGND	3245	-257
222	AGND	3304	-257
223	AGND	3363	-257
224	AVCL	3422	-257
225	AVCL	3481	-257
226	AVCL	3540	-257
227	AVCL	3599	-257
228	AVCL	3658	-257
229	AVCL	3717	-257
230	DUMMY	3776	-257
231	DUMMY	3835	-257
232	DUMMY	3894	-257
233	DUMMY	3953	-257
234	DUMMY	4012	-257
235	DUMMY	4071	-257
236	DUMMY	4130	-257
237	DUMMY	4189	-257
238	DUMMY	4248	-257
239	DUMMY	4307	-257
240	DUMMY	4366	-257
241	DUMMY	4425	-257
242	AVDD	4484	-257
243	AVDD	4543	-257
244	AVDD	4602	-257
245	AVDD	4661	-257
246	AVDD	4720	-257
247	AVDD	4779	-257
248	AVDD	4838	-257
249	AVDD	4897	-257
250	PGND	4956	-257
251	PGND	5015	-257
252	PGND	5074	-257
253	PGND	5133	-257
254	PGND	5192	-257
255	PGND	5251	-257
256	PGND	5310	-257
257	PGND	5369	-257
258	DUMMY	5428	-257
259	DUMMY	5487	-257
260	DUMMY	5546	-257
261	DUMMY	5605	-257
262	AVDD1	5664	-257
263	AVDD1	5723	-257
264	AVDD1	5782	-257
265	AVDD1	5841	-257
266	AVDD1	5900	-257
267	AVDD1	5959	-257
268	TESTOUT9	6018	-257
269	TESTOUT9	6077	-257

NO.	Pin Name	X	Y
270	TESTOUT9	6136	-257
271	TESTOUT9	6195	-257
272	TESTOUT9	6254	-257
273	TESTOUT9	6313	-257
274	AVCL1	6372	-257
275	AVCL1	6431	-257
276	AVCL1	6490	-257
277	AVCL1	6549	-257
278	AVCL1	6608	-257
279	AVCL1	6667	-257
280	TESTOUT11	6726	-257
281	TESTOUT11	6785	-257
282	TESTOUT11	6844	-257
283	TESTOUT11	6903	-257
284	TESTOUT11	6962	-257
285	TESTOUT11	7021	-257
286	PVDD	7080	-257
287	PVDD	7139	-257
288	PVDD	7198	-257
289	PVDD	7257	-257
290	PVDD	7316	-257
291	PVDD	7375	-257
292	PVDD	7434	-257
293	PVDD	7493	-257
294	VGSP	7552	-257
295	VGSP	7611	-257
296	VGSP	7670	-257
297	VGSP	7729	-257
298	VGSP	7788	-257
299	VGSP	7847	-257
300	TESTOUT13	7906	-257
301	TESTOUT13	7965	-257
302	TESTOUT13	8024	-257
303	TESTOUT13	8083	-257
304	TESTOUT13	8142	-257
305	TESTOUT13	8201	-257
306	VGH	8260	-257
307	VGH	8319	-257
308	VGH	8378	-257
309	VGH	8437	-257
310	VGH	8496	-257
311	VGH	8555	-257
312	TESTOUT14	8614	-257
313	TESTOUT14	8673	-257
314	TESTOUT14	8732	-257
315	TESTOUT14	8791	-257
316	TESTOUT14	8850	-257
317	TESTOUT14	8909	-257
318	TESTOUT15	8968	-257
319	TESTOUT15	9027	-257
320	TESTOUT15	9086	-257
321	TESTOUT15	9145	-257
322	TESTOUT15	9204	-257
323	TESTOUT15	9263	-257
324	VGL	9322	-257

NV3047E—480(RGB) x272 TFT LCD Single-Chip Driver

NO.	Pin Name	X	Y
325	VGL	9381	-257
326	VGL	9440	-257
327	VGL	9499	-257
328	VGL	9558	-257
329	VGL	9617	-257
330	DUMMY	9676	-257
331	DUMMY	9735	-257
332	DUMMY	9945	127
333	DUMMY	9930	257
334	G2	9900	127
335	G4	9885	257
336	G6	9870	127
337	G8	9855	257
338	G10	9840	127
339	G12	9825	257
340	G14	9810	127
341	G16	9795	257
342	G18	9780	127
343	G20	9765	257
344	G22	9750	127
345	G24	9735	257
346	G26	9720	127
347	G28	9705	257
348	G30	9690	127
349	G32	9675	257
350	G34	9660	127
351	G36	9645	257
352	G38	9630	127
353	G40	9615	257
354	G42	9600	127
355	G44	9585	257
356	G46	9570	127
357	G48	9555	257
358	G50	9540	127
359	G52	9525	257
360	G54	9510	127
361	G56	9495	257
362	G58	9480	127
363	G60	9465	257
364	G62	9450	127
365	G64	9435	257
366	G66	9420	127
367	G68	9405	257
368	G70	9390	127
369	G72	9375	257
370	G74	9360	127
371	G76	9345	257
372	G78	9330	127
373	G80	9315	257
374	G82	9300	127
375	G84	9285	257
376	G86	9270	127
377	G88	9255	257
378	G90	9240	127
379	G92	9225	257

NO.	Pin Name	X	Y
380	G94	9210	127
381	G96	9195	257
382	G98	9180	127
383	G100	9165	257
384	G102	9150	127
385	G104	9135	257
386	G106	9120	127
387	G108	9105	257
388	G110	9090	127
389	G112	9075	257
390	G114	9060	127
391	G116	9045	257
392	G118	9030	127
393	G120	9015	257
394	G122	9000	127
395	G124	8985	257
396	G126	8970	127
397	G128	8955	257
398	G130	8940	127
399	G132	8925	257
400	G134	8910	127
401	G136	8895	257
402	G138	8880	127
403	G140	8865	257
404	G142	8850	127
405	G144	8835	257
406	G146	8820	127
407	G148	8805	257
408	G150	8790	127
409	G152	8775	257
410	G154	8760	127
411	G156	8745	257
412	G158	8730	127
413	G160	8715	257
414	G162	8700	127
415	G164	8685	257
416	G166	8670	127
417	G168	8655	257
418	G170	8640	127
419	G172	8625	257
420	G174	8610	127
421	G176	8595	257
422	G178	8580	127
423	G180	8565	257
424	G182	8550	127
425	G184	8535	257
426	G186	8520	127
427	G188	8505	257
428	G190	8490	127
429	G192	8475	257
430	G194	8460	127
431	G196	8445	257
432	G198	8430	127
433	G200	8415	257
434	G202	8400	127

NO.	Pin Name	X	Y
435	G204	8385	257
436	G206	8370	127
437	G208	8355	257
438	G210	8340	127
439	G212	8325	257
440	G214	8310	127
441	G216	8295	257
442	G218	8280	127
443	G220	8265	257
444	G222	8250	127
445	G224	8235	257
446	G226	8220	127
447	G228	8205	257
448	G230	8190	127
449	G232	8175	257
450	G234	8160	127
451	G236	8145	257
452	G238	8130	127
453	G240	8115	257
454	G242	8100	127
455	G244	8085	257
456	G246	8070	127
457	G248	8055	257
458	G250	8040	127
459	G252	8025	257
460	G254	8010	127
461	G256	7995	257
462	G258	7980	127
463	G260	7965	257
464	G262	7950	127
465	G264	7935	257
466	G266	7920	127
467	G268	7905	257
468	G270	7890	127
469	G272	7875	257
470	G274	7860	127
471	G276	7845	257
472	G278	7830	127
473	G280	7815	257
474	G282	7800	127
475	G284	7785	257
476	G286	7770	127
477	G288	7755	257
478	G290	7740	127
479	G292	7725	257
480	G294	7710	127
481	G296	7695	257
482	G298	7680	127
483	G300	7665	257
484	G302	7650	127
485	G304	7635	257
486	G306	7620	127
487	G308	7605	257
488	G310	7590	127
489	G312	7575	257

NV3047E—480(RGB) x272 TFT LCD Single-Chip Driver

NO.	Pin Name	X	Y
490	G314	7560	127
491	G316	7545	257
492	G318	7530	127
493	G320	7515	257
494	G322	7500	127
495	G324	7485	257
496	G326	7470	127
497	G328	7455	257
498	G330	7440	127
499	G332	7425	257
500	G334	7410	127
501	G336	7395	257
502	G338	7380	127
503	G340	7365	257
504	G342	7350	127
505	G344	7335	257
506	G346	7320	127
507	G348	7305	257
508	G350	7290	127
509	G352	7275	257
510	G354	7260	127
511	G356	7245	257
512	G358	7230	127
513	G360	7215	257
514	G362	7200	127
515	G364	7185	257
516	G366	7170	127
517	G368	7155	257
518	G370	7140	127
519	G372	7125	257
520	G374	7110	127
521	G376	7095	257
522	G378	7080	127
523	G380	7065	257
524	G382	7050	127
525	G384	7035	257
526	G386	7020	127
527	G388	7005	257
528	G390	6990	127
529	G392	6975	257
530	G394	6960	127
531	G396	6945	257
532	G398	6930	127
533	G400	6915	257
534	G402	6900	127
535	G404	6885	257
536	G406	6870	127
537	G408	6855	257
538	G410	6840	127
539	G412	6825	257
540	G414	6810	127
541	G416	6795	257
542	G418	6780	127
543	G420	6765	257
544	G422	6750	127

NO.	Pin Name	X	Y
545	G424	6735	257
546	G426	6720	127
547	G428	6705	257
548	G430	6690	127
549	G432	6675	257
550	G434	6660	127
551	G436	6645	257
552	G438	6630	127
553	G440	6615	257
554	G442	6600	127
555	G444	6585	257
556	G446	6570	127
557	G448	6555	257
558	G450	6540	127
559	G452	6525	257
560	G454	6510	127
561	G456	6495	257
562	G458	6480	127
563	G460	6465	257
564	G462	6450	127
565	G464	6435	257
566	G466	6420	127
567	G468	6405	257
568	G470	6390	127
569	G472	6375	257
570	G474	6360	127
571	G476	6345	257
572	G478	6330	127
573	G480	6315	257
574	G482	6300	127
575	G484	6285	257
576	G486	6270	127
577	G488	6255	257
578	G490	6240	127
579	G492	6225	257
580	G494	6210	127
581	G496	6195	257
582	G498	6180	127
583	G500	6165	257
584	G502	6150	127
585	G504	6135	257
586	G506	6120	127
587	G508	6105	257
588	G510	6090	127
589	G512	6075	257
590	G514	6060	127
591	G516	6045	257
592	G518	6030	127
593	G520	6015	257
594	G522	6000	127
595	G524	5985	257
596	G526	5970	127
597	G528	5955	257
598	G530	5940	127
599	G532	5925	257

NO.	Pin Name	X	Y
600	G534	5910	127
601	G536	5895	257
602	G538	5880	127
603	G540	5865	257
604	G542	5850	127
605	G544	5835	257
606	DUMMY	5760	127
607	DUMMY	5745	257
608	DUMMY	5730	127
609	DUMMY	5715	257
610	DUMMY	5700	127
611	DUMMY	5685	257
612	S1	5610	127
613	S2	5595	257
614	S3	5580	127
615	S4	5565	257
616	S5	5550	127
617	S6	5535	257
618	S7	5520	127
619	S8	5505	257
620	S9	5490	127
621	S10	5475	257
622	S11	5460	127
623	S12	5445	257
624	S13	5430	127
625	S14	5415	257
626	S15	5400	127
627	S16	5385	257
628	S17	5370	127
629	S18	5355	257
630	S19	5340	127
631	S20	5325	257
632	S21	5310	127
633	S22	5295	257
634	S23	5280	127
635	S24	5265	257
636	S25	5250	127
637	S26	5235	257
638	S27	5220	127
639	S28	5205	257
640	S29	5190	127
641	S30	5175	257
642	S31	5160	127
643	S32	5145	257
644	S33	5130	127
645	S34	5115	257
646	S35	5100	127
647	S36	5085	257
648	S37	5070	127
649	S38	5055	257
650	S39	5040	127
651	S40	5025	257
652	S41	5010	127
653	S42	4995	257
654	S43	4980	127

NV3047E—480(RGB) x272 TFT LCD Single-Chip Driver

NO.	Pin Name	X	Y
655	S44	4965	257
656	S45	4950	127
657	S46	4935	257
658	S47	4920	127
659	S48	4905	257
660	S49	4890	127
661	S50	4875	257
662	S51	4860	127
663	S52	4845	257
664	S53	4830	127
665	S54	4815	257
666	S55	4800	127
667	S56	4785	257
668	S57	4770	127
669	S58	4755	257
670	S59	4740	127
671	S60	4725	257
672	S61	4710	127
673	S62	4695	257
674	S63	4680	127
675	S64	4665	257
676	S65	4650	127
677	S66	4635	257
678	S67	4620	127
679	S68	4605	257
680	S69	4590	127
681	S70	4575	257
682	S71	4560	127
683	S72	4545	257
684	S73	4530	127
685	S74	4515	257
686	S75	4500	127
687	S76	4485	257
688	S77	4470	127
689	S78	4455	257
690	S79	4440	127
691	S80	4425	257
692	S81	4410	127
693	S82	4395	257
694	S83	4380	127
695	S84	4365	257
696	S85	4350	127
697	S86	4335	257
698	S87	4320	127
699	S88	4305	257
700	S89	4290	127
701	S90	4275	257
702	S91	4260	127
703	S92	4245	257
704	S93	4230	127
705	S94	4215	257
706	S95	4200	127
707	S96	4185	257
708	S97	4170	127
709	S98	4155	257

NO.	Pin Name	X	Y
710	S99	4140	127
711	S100	4125	257
712	S101	4110	127
713	S102	4095	257
714	S103	4080	127
715	S104	4065	257
716	S105	4050	127
717	S106	4035	257
718	S107	4020	127
719	S108	4005	257
720	S109	3990	127
721	S110	3975	257
722	S111	3960	127
723	S112	3945	257
724	S113	3930	127
725	S114	3915	257
726	S115	3900	127
727	S116	3885	257
728	S117	3870	127
729	S118	3855	257
730	S119	3840	127
731	S120	3825	257
732	S121	3810	127
733	S122	3795	257
734	S123	3780	127
735	S124	3765	257
736	S125	3750	127
737	S126	3735	257
738	S127	3720	127
739	S128	3705	257
740	S129	3690	127
741	S130	3675	257
742	S131	3660	127
743	S132	3645	257
744	S133	3630	127
745	S134	3615	257
746	S135	3600	127
747	S136	3585	257
748	S137	3570	127
749	S138	3555	257
750	S139	3540	127
751	S140	3525	257
752	S141	3510	127
753	S142	3495	257
754	S143	3480	127
755	S144	3465	257
756	S145	3450	127
757	S146	3435	257
758	S147	3420	127
759	S148	3405	257
760	S149	3390	127
761	S150	3375	257
762	S151	3360	127
763	S152	3345	257
764	S153	3330	127

NO.	Pin Name	X	Y
765	S154	3315	257
766	S155	3300	127
767	S156	3285	257
768	S157	3270	127
769	S158	3255	257
770	S159	3240	127
771	S160	3225	257
772	S161	3210	127
773	S162	3195	257
774	S163	3180	127
775	S164	3165	257
776	S165	3150	127
777	S166	3135	257
778	S167	3120	127
779	S168	3105	257
780	S169	3090	127
781	S170	3075	257
782	S171	3060	127
783	S172	3045	257
784	S173	3030	127
785	S174	3015	257
786	S175	3000	127
787	S176	2985	257
788	S177	2970	127
789	S178	2955	257
790	S179	2940	127
791	S180	2925	257
792	S181	2910	127
793	S182	2895	257
794	S183	2880	127
795	S184	2865	257
796	S185	2850	127
797	S186	2835	257
798	S187	2820	127
799	S188	2805	257
800	S189	2790	127
801	S190	2775	257
802	S191	2760	127
803	S192	2745	257
804	S193	2730	127
805	S194	2715	257
806	S195	2700	127
807	S196	2685	257
808	S197	2670	127
809	S198	2655	257
810	S199	2640	127
811	S200	2625	257
812	S201	2610	127
813	S202	2595	257
814	S203	2580	127
815	S204	2565	257
816	S205	2550	127
817	S206	2535	257
818	S207	2520	127
819	S208	2505	257

NV3047E—480(RGB) x272 TFT LCD Single-Chip Driver

NO.	Pin Name	X	Y
820	S209	2490	127
821	S210	2475	257
822	S211	2460	127
823	S212	2445	257
824	S213	2430	127
825	S214	2415	257
826	S215	2400	127
827	S216	2385	257
828	S217	2370	127
829	S218	2355	257
830	S219	2340	127
831	S220	2325	257
832	S221	2310	127
833	S222	2295	257
834	S223	2280	127
835	S224	2265	257
836	S225	2250	127
837	S226	2235	257
838	S227	2220	127
839	S228	2205	257
840	S229	2190	127
841	S230	2175	257
842	S231	2160	127
843	S232	2145	257
844	S233	2130	127
845	S234	2115	257
846	S235	2100	127
847	S236	2085	257
848	S237	2070	127
849	S238	2055	257
850	S239	2040	127
851	S240	2025	257
852	S241	2010	127
853	S242	1995	257
854	S243	1980	127
855	S244	1965	257
856	S245	1950	127
857	S246	1935	257
858	S247	1920	127
859	S248	1905	257
860	S249	1890	127
861	S250	1875	257
862	S251	1860	127
863	S252	1845	257
864	S253	1830	127
865	S254	1815	257
866	S255	1800	127
867	S256	1785	257
868	S257	1770	127
869	S258	1755	257
870	S259	1740	127
871	S260	1725	257
872	S261	1710	127
873	S262	1695	257
874	S263	1680	127

NO.	Pin Name	X	Y
875	S264	1665	257
876	S265	1650	127
877	S266	1635	257
878	S267	1620	127
879	S268	1605	257
880	S269	1590	127
881	S270	1575	257
882	S271	1560	127
883	S272	1545	257
884	S273	1530	127
885	S274	1515	257
886	S275	1500	127
887	S276	1485	257
888	S277	1470	127
889	S278	1455	257
890	S279	1440	127
891	S280	1425	257
892	S281	1410	127
893	S282	1395	257
894	S283	1380	127
895	S284	1365	257
896	S285	1350	127
897	S286	1335	257
898	S287	1320	127
899	S288	1305	257
900	S289	1290	127
901	S290	1275	257
902	S291	1260	127
903	S292	1245	257
904	S293	1230	127
905	S294	1215	257
906	S295	1200	127
907	S296	1185	257
908	S297	1170	127
909	S298	1155	257
910	S299	1140	127
911	S300	1125	257
912	S301	1110	127
913	S302	1095	257
914	S303	1080	127
915	S304	1065	257
916	S305	1050	127
917	S306	1035	257
918	S307	1020	127
919	S308	1005	257
920	S309	990	127
921	S310	975	257
922	S311	960	127
923	S312	945	257
924	S313	930	127
925	S314	915	257
926	S315	900	127
927	S316	885	257
928	S317	870	127
929	S318	855	257

NO.	Pin Name	X	Y
930	S319	840	127
931	S320	825	257
932	S321	810	127
933	S322	795	257
934	S323	780	127
935	S324	765	257
936	S325	750	127
937	S326	735	257
938	S327	720	127
939	S328	705	257
940	S329	690	127
941	S330	675	257
942	S331	660	127
943	S332	645	257
944	S333	630	127
945	S334	615	257
946	S335	600	127
947	S336	585	257
948	S337	570	127
949	S338	555	257
950	S339	540	127
951	S340	525	257
952	S341	510	127
953	S342	495	257
954	S343	480	127
955	S344	465	257
956	S345	450	127
957	S346	435	257
958	S347	420	127
959	S348	405	257
960	S349	390	127
961	S350	375	257
962	S351	360	127
963	S352	345	257
964	S353	330	127
965	S354	315	257
966	S355	300	127
967	S356	285	257
968	S357	270	127
969	S358	255	257
970	S359	240	127
971	S360	225	257
972	DUMMY	150	127
973	DUMMY	135	257
974	DUMMY	120	127
975	DUMMY	105	257
976	DUMMY	90	127
977	DUMMY	75	257
978	DUMMY	60	127
979	S361	-15	257
980	S362	-30	127
981	S363	-45	257
982	S364	-60	127
983	S365	-75	257
984	S366	-90	127

NV3047E—480(RGB) x272 TFT LCD Single-Chip Driver

NO.	Pin Name	X	Y
985	S367	-105	257
986	S368	-120	127
987	S369	-135	257
988	S370	-150	127
989	S371	-165	257
990	S372	-180	127
991	S373	-195	257
992	S374	-210	127
993	S375	-225	257
994	S376	-240	127
995	S377	-255	257
996	S378	-270	127
997	S379	-285	257
998	S380	-300	127
999	S381	-315	257
1000	S382	-330	127
1001	S383	-345	257
1002	S384	-360	127
1003	S385	-375	257
1004	S386	-390	127
1005	S387	-405	257
1006	S388	-420	127
1007	S389	-435	257
1008	S390	-450	127
1009	S391	-465	257
1010	S392	-480	127
1011	S393	-495	257
1012	S394	-510	127
1013	S395	-525	257
1014	S396	-540	127
1015	S397	-555	257
1016	S398	-570	127
1017	S399	-585	257
1018	S400	-600	127
1019	S401	-615	257
1020	S402	-630	127
1021	S403	-645	257
1022	S404	-660	127
1023	S405	-675	257
1024	S406	-690	127
1025	S407	-705	257
1026	S408	-720	127
1027	S409	-735	257
1028	S410	-750	127
1029	S411	-765	257
1030	S412	-780	127
1031	S413	-795	257
1032	S414	-810	127
1033	S415	-825	257
1034	S416	-840	127
1035	S417	-855	257
1036	S418	-870	127
1037	S419	-885	257
1038	S420	-900	127
1039	S421	-915	257

NO.	Pin Name	X	Y
1040	S422	-930	127
1041	S423	-945	257
1042	S424	-960	127
1043	S425	-975	257
1044	S426	-990	127
1045	S427	-1005	257
1046	S428	-1020	127
1047	S429	-1035	257
1048	S430	-1050	127
1049	S431	-1065	257
1050	S432	-1080	127
1051	S433	-1095	257
1052	S434	-1110	127
1053	S435	-1125	257
1054	S436	-1140	127
1055	S437	-1155	257
1056	S438	-1170	127
1057	S439	-1185	257
1058	S440	-1200	127
1059	S441	-1215	257
1060	S442	-1230	127
1061	S443	-1245	257
1062	S444	-1260	127
1063	S445	-1275	257
1064	S446	-1290	127
1065	S447	-1305	257
1066	S448	-1320	127
1067	S449	-1335	257
1068	S450	-1350	127
1069	S451	-1365	257
1070	S452	-1380	127
1071	S453	-1395	257
1072	S454	-1410	127
1073	S455	-1425	257
1074	S456	-1440	127
1075	S457	-1455	257
1076	S458	-1470	127
1077	S459	-1485	257
1078	S460	-1500	127
1079	S461	-1515	257
1080	S462	-1530	127
1081	S463	-1545	257
1082	S464	-1560	127
1083	S465	-1575	257
1084	S466	-1590	127
1085	S467	-1605	257
1086	S468	-1620	127
1087	S469	-1635	257
1088	S470	-1650	127
1089	S471	-1665	257
1090	S472	-1680	127
1091	S473	-1695	257
1092	S474	-1710	127
1093	S475	-1725	257
1094	S476	-1740	127

NO.	Pin Name	X	Y
1095	S477	-1755	257
1096	S478	-1770	127
1097	S479	-1785	257
1098	S480	-1800	127
1099	S481	-1815	257
1100	S482	-1830	127
1101	S483	-1845	257
1102	S484	-1860	127
1103	S485	-1875	257
1104	S486	-1890	127
1105	S487	-1905	257
1106	S488	-1920	127
1107	S489	-1935	257
1108	S490	-1950	127
1109	S491	-1965	257
1110	S492	-1980	127
1111	S493	-1995	257
1112	S494	-2010	127
1113	S495	-2025	257
1114	S496	-2040	127
1115	S497	-2055	257
1116	S498	-2070	127
1117	S499	-2085	257
1118	S500	-2100	127
1119	S501	-2115	257
1120	S502	-2130	127
1121	S503	-2145	257
1122	S504	-2160	127
1123	S505	-2175	257
1124	S506	-2190	127
1125	S507	-2205	257
1126	S508	-2220	127
1127	S509	-2235	257
1128	S510	-2250	127
1129	S511	-2265	257
1130	S512	-2280	127
1131	S513	-2295	257
1132	S514	-2310	127
1133	S515	-2325	257
1134	S516	-2340	127
1135	S517	-2355	257
1136	S518	-2370	127
1137	S519	-2385	257
1138	S520	-2400	127
1139	S521	-2415	257
1140	S522	-2430	127
1141	S523	-2445	257
1142	S524	-2460	127
1143	S525	-2475	257
1144	S526	-2490	127
1145	S527	-2505	257
1146	S528	-2520	127
1147	S529	-2535	257
1148	S530	-2550	127
1149	S531	-2565	257

NV3047E—480(RGB) x272 TFT LCD Single-Chip Driver

NO.	Pin Name	X	Y
1150	S532	-2580	127
1151	S533	-2595	257
1152	S534	-2610	127
1153	S535	-2625	257
1154	S536	-2640	127
1155	S537	-2655	257
1156	S538	-2670	127
1157	S539	-2685	257
1158	S540	-2700	127
1159	S541	-2715	257
1160	S542	-2730	127
1161	S543	-2745	257
1162	S544	-2760	127
1163	S545	-2775	257
1164	S546	-2790	127
1165	S547	-2805	257
1166	S548	-2820	127
1167	S549	-2835	257
1168	S550	-2850	127
1169	S551	-2865	257
1170	S552	-2880	127
1171	S553	-2895	257
1172	S554	-2910	127
1173	S555	-2925	257
1174	S556	-2940	127
1175	S557	-2955	257
1176	S558	-2970	127
1177	S559	-2985	257
1178	S560	-3000	127
1179	S561	-3015	257
1180	S562	-3030	127
1181	S563	-3045	257
1182	S564	-3060	127
1183	S565	-3075	257
1184	S566	-3090	127
1185	S567	-3105	257
1186	S568	-3120	127
1187	S569	-3135	257
1188	S570	-3150	127
1189	S571	-3165	257
1190	S572	-3180	127
1191	S573	-3195	257
1192	S574	-3210	127
1193	S575	-3225	257
1194	S576	-3240	127
1195	S577	-3255	257
1196	S578	-3270	127
1197	S579	-3285	257
1198	S580	-3300	127
1199	S581	-3315	257
1200	S582	-3330	127
1201	S583	-3345	257
1202	S584	-3360	127
1203	S585	-3375	257
1204	S586	-3390	127

NO.	Pin Name	X	Y
1205	S587	-3405	257
1206	S588	-3420	127
1207	S589	-3435	257
1208	S590	-3450	127
1209	S591	-3465	257
1210	S592	-3480	127
1211	S593	-3495	257
1212	S594	-3510	127
1213	S595	-3525	257
1214	S596	-3540	127
1215	S597	-3555	257
1216	S598	-3570	127
1217	S599	-3585	257
1218	S600	-3600	127
1219	S601	-3615	257
1220	S602	-3630	127
1221	S603	-3645	257
1222	S604	-3660	127
1223	S605	-3675	257
1224	S606	-3690	127
1225	S607	-3705	257
1226	S608	-3720	127
1227	S609	-3735	257
1228	S610	-3750	127
1229	S611	-3765	257
1230	S612	-3780	127
1231	S613	-3795	257
1232	S614	-3810	127
1233	S615	-3825	257
1234	S616	-3840	127
1235	S617	-3855	257
1236	S618	-3870	127
1237	S619	-3885	257
1238	S620	-3900	127
1239	S621	-3915	257
1240	S622	-3930	127
1241	S623	-3945	257
1242	S624	-3960	127
1243	S625	-3975	257
1244	S626	-3990	127
1245	S627	-4005	257
1246	S628	-4020	127
1247	S629	-4035	257
1248	S630	-4050	127
1249	S631	-4065	257
1250	S632	-4080	127
1251	S633	-4095	257
1252	S634	-4110	127
1253	S635	-4125	257
1254	S636	-4140	127
1255	S637	-4155	257
1256	S638	-4170	127
1257	S639	-4185	257
1258	S640	-4200	127
1259	S641	-4215	257

NO.	Pin Name	X	Y
1260	S642	-4230	127
1261	S643	-4245	257
1262	S644	-4260	127
1263	S645	-4275	257
1264	S646	-4290	127
1265	S647	-4305	257
1266	S648	-4320	127
1267	S649	-4335	257
1268	S650	-4350	127
1269	S651	-4365	257
1270	S652	-4380	127
1271	S653	-4395	257
1272	S654	-4410	127
1273	S655	-4425	257
1274	S656	-4440	127
1275	S657	-4455	257
1276	S658	-4470	127
1277	S659	-4485	257
1278	S660	-4500	127
1279	S661	-4515	257
1280	S662	-4530	127
1281	S663	-4545	257
1282	S664	-4560	127
1283	S665	-4575	257
1284	S666	-4590	127
1285	S667	-4605	257
1286	S668	-4620	127
1287	S669	-4635	257
1288	S670	-4650	127
1289	S671	-4665	257
1290	S672	-4680	127
1291	S673	-4695	257
1292	S674	-4710	127
1293	S675	-4725	257
1294	S676	-4740	127
1295	S677	-4755	257
1296	S678	-4770	127
1297	S679	-4785	257
1298	S680	-4800	127
1299	S681	-4815	257
1300	S682	-4830	127
1301	S683	-4845	257
1302	S684	-4860	127
1303	S685	-4875	257
1304	S686	-4890	127
1305	S687	-4905	257
1306	S688	-4920	127
1307	S689	-4935	257
1308	S690	-4950	127
1309	S691	-4965	257
1310	S692	-4980	127
1311	S693	-4995	257
1312	S694	-5010	127
1313	S695	-5025	257
1314	S696	-5040	127

NV3047E—480(RGB) x272 TFT LCD Single-Chip Driver

NO.	Pin Name	X	Y
1315	S697	-5055	257
1316	S698	-5070	127
1317	S699	-5085	257
1318	S700	-5100	127
1319	S701	-5115	257
1320	S702	-5130	127
1321	S703	-5145	257
1322	S704	-5160	127
1323	S705	-5175	257
1324	S706	-5190	127
1325	S707	-5205	257
1326	S708	-5220	127
1327	S709	-5235	257
1328	S710	-5250	127
1329	S711	-5265	257
1330	S712	-5280	127
1331	S713	-5295	257
1332	S714	-5310	127
1333	S715	-5325	257
1334	S716	-5340	127
1335	S717	-5355	257
1336	S718	-5370	127
1337	S719	-5385	257
1338	S720	-5400	127
1339	VCOM	-5475	257
1340	VCOM	-5490	127
1341	VCOM	-5505	257
1342	VCOM	-5520	127
1343	VCOM	-5535	257
1344	VCOM	-5550	127
1345	VCOM	-5565	257
1346	VCOM	-5580	127
1347	VCOM	-5595	257
1348	VCOM	-5610	127
1349	DUMMY	-5685	257
1350	DUMMY	-5700	127
1351	DUMMY	-5715	257
1352	DUMMY	-5730	127
1353	DUMMY	-5745	257
1354	DUMMY	-5760	127
1355	G543	-5835	257
1356	G541	-5850	127
1357	G539	-5865	257
1358	G537	-5880	127
1359	G535	-5895	257
1360	G533	-5910	127
1361	G531	-5925	257
1362	G529	-5940	127
1363	G527	-5955	257
1364	G525	-5970	127
1365	G523	-5985	257
1366	G521	-6000	127
1367	G519	-6015	257
1368	G517	-6030	127
1369	G515	-6045	257

NO.	Pin Name	X	Y
1370	G513	-6060	127
1371	G511	-6075	257
1372	G509	-6090	127
1373	G507	-6105	257
1374	G505	-6120	127
1375	G503	-6135	257
1376	G501	-6150	127
1377	G499	-6165	257
1378	G497	-6180	127
1379	G495	-6195	257
1380	G493	-6210	127
1381	G491	-6225	257
1382	G489	-6240	127
1383	G487	-6255	257
1384	G485	-6270	127
1385	G483	-6285	257
1386	G481	-6300	127
1387	G479	-6315	257
1388	G477	-6330	127
1389	G475	-6345	257
1390	G473	-6360	127
1391	G471	-6375	257
1392	G469	-6390	127
1393	G467	-6405	257
1394	G465	-6420	127
1395	G463	-6435	257
1396	G461	-6450	127
1397	G459	-6465	257
1398	G457	-6480	127
1399	G455	-6495	257
1400	G453	-6510	127
1401	G451	-6525	257
1402	G449	-6540	127
1403	G447	-6555	257
1404	G445	-6570	127
1405	G443	-6585	257
1406	G441	-6600	127
1407	G439	-6615	257
1408	G437	-6630	127
1409	G435	-6645	257
1410	G433	-6660	127
1411	G431	-6675	257
1412	G429	-6690	127
1413	G427	-6705	257
1414	G425	-6720	127
1415	G423	-6735	257
1416	G421	-6750	127
1417	G419	-6765	257
1418	G417	-6780	127
1419	G415	-6795	257
1420	G413	-6810	127
1421	G411	-6825	257
1422	G409	-6840	127
1423	G407	-6855	257
1424	G405	-6870	127

NO.	Pin Name	X	Y
1425	G403	-6885	257
1426	G401	-6900	127
1427	G399	-6915	257
1428	G397	-6930	127
1429	G395	-6945	257
1430	G393	-6960	127
1431	G391	-6975	257
1432	G389	-6990	127
1433	G387	-7005	257
1434	G385	-7020	127
1435	G383	-7035	257
1436	G381	-7050	127
1437	G379	-7065	257
1438	G377	-7080	127
1439	G375	-7095	257
1440	G373	-7110	127
1441	G371	-7125	257
1442	G369	-7140	127
1443	G367	-7155	257
1444	G365	-7170	127
1445	G363	-7185	257
1446	G361	-7200	127
1447	G359	-7215	257
1448	G357	-7230	127
1449	G355	-7245	257
1450	G353	-7260	127
1451	G351	-7275	257
1452	G349	-7290	127
1453	G347	-7305	257
1454	G345	-7320	127
1455	G343	-7335	257
1456	G341	-7350	127
1457	G339	-7365	257
1458	G337	-7380	127
1459	G335	-7395	257
1460	G333	-7410	127
1461	G331	-7425	257
1462	G329	-7440	127
1463	G327	-7455	257
1464	G325	-7470	127
1465	G323	-7485	257
1466	G321	-7500	127
1467	G319	-7515	257
1468	G317	-7530	127
1469	G315	-7545	257
1470	G313	-7560	127
1471	G311	-7575	257
1472	G309	-7590	127
1473	G307	-7605	257
1474	G305	-7620	127
1475	G303	-7635	257
1476	G301	-7650	127
1477	G299	-7665	257
1478	G297	-7680	127
1479	G295	-7695	257


NV3047E—480(RGB) x272 TFT LCD Single-Chip Driver

NO.	Pin Name	X	Y
1480	G293	-7710	127
1481	G291	-7725	257
1482	G289	-7740	127
1483	G287	-7755	257
1484	G285	-7770	127
1485	G283	-7785	257
1486	G281	-7800	127
1487	G279	-7815	257
1488	G277	-7830	127
1489	G275	-7845	257
1490	G273	-7860	127
1491	G271	-7875	257
1492	G269	-7890	127
1493	G267	-7905	257
1494	G265	-7920	127
1495	G263	-7935	257
1496	G261	-7950	127
1497	G259	-7965	257
1498	G257	-7980	127
1499	G255	-7995	257
1500	G253	-8010	127
1501	G251	-8025	257
1502	G249	-8040	127
1503	G247	-8055	257
1504	G245	-8070	127
1505	G243	-8085	257
1506	G241	-8100	127
1507	G239	-8115	257
1508	G237	-8130	127
1509	G235	-8145	257
1510	G233	-8160	127
1511	G231	-8175	257
1512	G229	-8190	127
1513	G227	-8205	257
1514	G225	-8220	127
1515	G223	-8235	257
1516	G221	-8250	127
1517	G219	-8265	257
1518	G217	-8280	127
1519	G215	-8295	257
1520	G213	-8310	127
1521	G211	-8325	257
1522	G209	-8340	127
1523	G207	-8355	257
1524	G205	-8370	127
1525	G203	-8385	257
1526	G201	-8400	127
1527	G199	-8415	257
1528	G197	-8430	127
1529	G195	-8445	257
1530	G193	-8460	127
1531	G191	-8475	257
1532	G189	-8490	127

NO.	Pin Name	X	Y
1533	G187	-8505	257
1534	G185	-8520	127
1535	G183	-8535	257
1536	G181	-8550	127
1537	G179	-8565	257
1538	G177	-8580	127
1539	G175	-8595	257
1540	G173	-8610	127
1541	G171	-8625	257
1542	G169	-8640	127
1543	G167	-8655	257
1544	G165	-8670	127
1545	G163	-8685	257
1546	G161	-8700	127
1547	G159	-8715	257
1548	G157	-8730	127
1549	G155	-8745	257
1550	G153	-8760	127
1551	G151	-8775	257
1552	G149	-8790	127
1553	G147	-8805	257
1554	G145	-8820	127
1555	G143	-8835	257
1556	G141	-8850	127
1557	G139	-8865	257
1558	G137	-8880	127
1559	G135	-8895	257
1560	G133	-8910	127
1561	G131	-8925	257
1562	G129	-8940	127
1563	G127	-8955	257
1564	G125	-8970	127
1565	G123	-8985	257
1566	G121	-9000	127
1567	G119	-9015	257
1568	G117	-9030	127
1569	G115	-9045	257
1570	G113	-9060	127
1571	G111	-9075	257
1572	G109	-9090	127
1573	G107	-9105	257
1574	G105	-9120	127
1575	G103	-9135	257
1576	G101	-9150	127
1577	G99	-9165	257
1578	G97	-9180	127
1579	G95	-9195	257
1580	G93	-9210	127
1581	G91	-9225	257
1582	G89	-9240	127
1583	G87	-9255	257
1584	G85	-9270	127
1585	G83	-9285	257

NO.	Pin Name	X	Y
1586	G81	-9300	127
1587	G79	-9315	257
1588	G77	-9330	127
1589	G75	-9345	257
1590	G73	-9360	127
1591	G71	-9375	257
1592	G69	-9390	127
1593	G67	-9405	257
1594	G65	-9420	127
1595	G63	-9435	257
1596	G61	-9450	127
1597	G59	-9465	257
1598	G57	-9480	127
1599	G55	-9495	257
1600	G53	-9510	127
1601	G51	-9525	257
1602	G49	-9540	127
1603	G47	-9555	257
1604	G45	-9570	127
1605	G43	-9585	257
1606	G41	-9600	127
1607	G39	-9615	257
1608	G37	-9630	127
1609	G35	-9645	257
1610	G33	-9660	127
1611	G31	-9675	257
1612	G29	-9690	127
1613	G27	-9705	257
1614	G25	-9720	127
1615	G23	-9735	257
1616	G21	-9750	127
1617	G19	-9765	257
1618	G17	-9780	127
1619	G15	-9795	257
1620	G13	-9810	127
1621	G11	-9825	257
1622	G9	-9840	127
1623	G7	-9855	257
1624	G5	-9870	127
1625	G3	-9885	257
1626	G1	-9900	127
1627	DUMMY	-9930	257
1628	DUMMY	-9945	127

4. Block Diagram

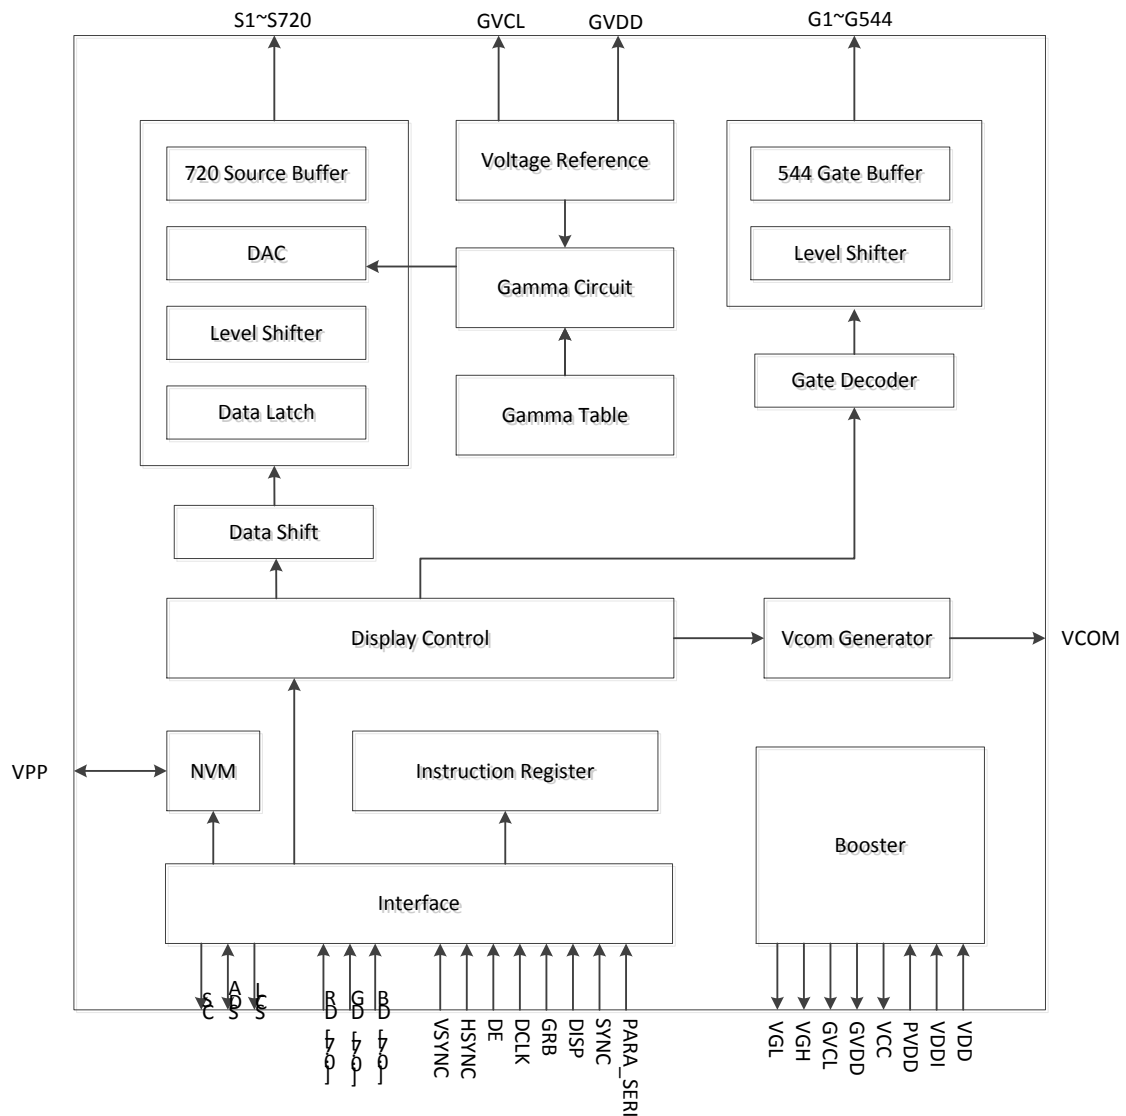

5. Pin Description

Pin Name	I/O	Description
CS	I	Serial communication chip select, Internal pull high.
SDA	I	Serial communication data input and output, Internal pull low.
SCL	I	Serial communication clock input, Internal pull low.
PARA_SERI	I	PARA_SERI="H", Parallel 24-bit RGB input through DR0~7, DB0~DB7, DG0~DG7. PARA_SERI="L", Serial 8-bit RGB input through DG0~DG7.
DR0~DR7	I	8-bit digital Red data input.
DG0~DG7	I	8-bit digital Green data input.
DB0~DB7	I	8-bit digital Blue data input.
DCLK	I	Clock signal; latching data at the falling edge.
HSYNC	I	Horizontal sync signal; negative polarity.
VSYNC	I	Vertical sync signal; negative polarity.
DE	I	Data input enable. Active High to enable the data input.
SYNC	I	No Function. User should connect it to "Low".
HDIR	I	Horizontal scan direction control (Please refer to the register setting : HDIR) HDIR (pin) = "Low": The definition of HDIR register setting is inversion from original. HDIR (register) = "0": Shift from left to right; HDIR (register) = "1": Shift from right to left. (Default) HDIR (pin) = "High": The definition of HDIR register setting is invariant. HDIR (register) = "0": Shift from right to left; HDIR (register) = "1": Shift from left to right. (Default)
VDIR	I	Vertical scan direction control (Please refer to the register setting: VDIR) VDIR (pin) = "Low": The definition of VDIR register setting is inversion from original. VDIR (register) = "0": Shift from up to down; VDIR (register) = "1": Shift from down to up. (Default) VDIR (pin) = "High": The definition of VDIR register setting is invariant. VDIR (register) = "0": Shift from down to up; VDIR (register) = "1": Shift from up to down. (Default)
VDPOL	I	VSYNC polarity control. VDPOL="1", negative polarity VDPOL=0, positive polarity When not used, user should connect it to "High" (Please refer to the register setting : VDPOL)

HDPOL	I	HSYNC polarity control. HDPOL="1", negative polarity HDPOL="0", positive polarity When not used, user should connect it to "High" (Please refer to the register setting : VDPOL)
DCLKPOL	I	DCLK polarity control. DCLKPOL="1", negative polarity DCLKPOL="0", positive polarity (Please refer to the register setting : DCLKPOL)
SBGR	I	Data R[7:0] & B[7:0] exchanged internally SBGR="1" R[7:0]→B[7:0] B[7:0]→R[7:0] SBGR="0" R[7:0]→R[7:0] B[7:0]→B[7:0]
GRB	I	Global reset. Active low, Internal pull high
DISP	I	Display control / standby mode selection. Internal pull high DISP = "Low": Standby. DISP = "High": Normal display
Power Supply		
VDD	P	Power supply for digital circuit
VDDI	P	Power supply for digital interface I/O pins
PVDD	P	Power supply for charge pump circuit
AGND	G	Ground pin for analog circuit
DGND	G	Ground pin for digital circuit
PGND	G	Ground pin for charge pump circuit
VCC	P	Internal digital power
VPP	P	Power input pin for NVM. When writing NVM, it needs external power supply voltage (7.5V). If not used, let this pin open.
AVCL	P	Power pad for analog circuit.
AVDD	P	Power pad for analog circuit.
AVCL1	P	A power supply pin for generating Gamma reference voltage (Negative).
AVDD1	P	A power supply pin for generating Gamma reference voltage (Positive).
VGH	P	Positive power supply for gate driver output.
VGL	P	Negative power supply for gate driver output.
GVDD	P	A reference voltage (Positive) of grayscale voltage generator.
GVCL	P	A reference voltage (Negative) of grayscale voltage generator.


VGSP	P	Internal Virtual Ground monitor pin
Test Pin		
TESTOUT9	O	Analog test pins for internal testing only.
TESTOUT11		
TESTOUT13		
TESTOUT14		
TESTOUT15		
TEST_IN[4:0]	I	Test pins for internal testing only. Internal pull low.
TEST_IN5	I	Test pins for internal testing only. Internal pull high.
TESTOUT[0:7]	O	Digital test pins for internal testing only.

Note:

I: input, O: output, I/O: input/output, P: power input, G: GND

If unused pin don't floating, the pin fix to VDDI or DGND.

6. 3-Wire serial interface

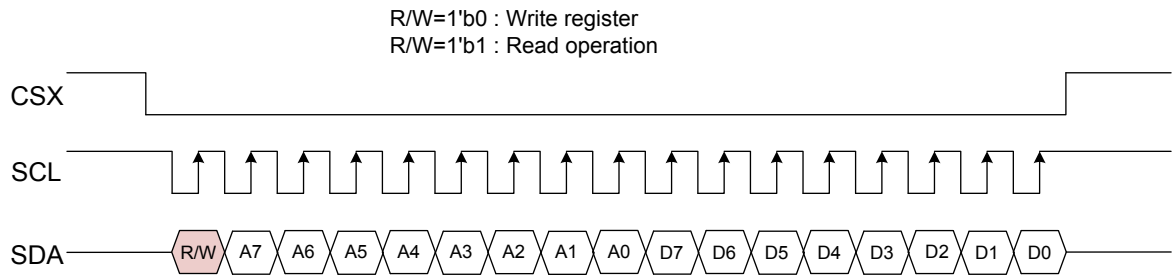

a. Each serial command consists of 17 bits of data which is loaded one bit at a time at the rising edge of serial clock SCL.

b. Command loading operation starts from the falling edge of CSX and is completed at the next rising edge of CSX.

c. The serial control block is operational after power on reset, but commands are established by the VSYNC signal. If command is transferred multiple times for the same register, the last command before the VSYNC signal is valid.

d. If less than 16 bits of SCL are input while CS is low, the transferred data is ignored.

e. If 16 bits or more of SCL are input while CS is low, the previous 16 bits of transferred data before the rising edge of CS pulse are valid data.

f. Serial block operates with the SCL clock

g. Serial data can be accepted in the power save mode.

7. Register list

7.1. Register Summary

Addr	R/W	Default	D7	D6	D5	D4	D3	D2	D1	D0	
0x04	W	0x40	global_ctr[7:0]								
0x05	W	0x40		sub_red_ctr[6:0]							
0x06	W	0x40		sub_blue_ctr[6:0]							
0x07	W	0x40	global_brt[7:0]								
0x08	W	0x40		sub_red_brt[6:0]							
0x09	W	0x40		sub_blue_brt[6:0]							
0x10	W	0x00	otp_addr[8]		otp_ptm[1:0]		otp_vpp_sel	otp_prog	otp_wr_en	otp_rd_en	
0x11	W	0x00	otp_addr[7:0]								
0x12	W	0x00	otp_wr_dat[7:0]								
0x13	R	0xff	otp_rd_dat[7:0]								
0x21	W	0x40		auto_detect	sync_ctrl[1:0]		depol	hpol	vpol	pclk_pol	
0x22	W	0x00							hbp_para[9:8]		
0x23	W	0x2b	hbp_para[7:0]								
0x24	W	0x08	hfp_para[7:0]								
0x25	W	0x0c	vbp_para[7:0]								
0x26	W	0x08	vfp_para[7:0]								
0x27	W	0x00							hbp_seri[9:8]		
0x28	W	0x81	hbp_seri[7:0]								
0x29	W	0x18	hfp_seri[7:0]								
0x2A	W	0x0c	vbp_seri[7:0]								
0x2B	W	0x08	vfp_seri[7:0]								
0x30	W	0x55	avdd_clp_ibadj[1:0]		avcl_clp_ibadj[1:0]		gam_ibadj[1:0]		gam_ldo_ibadj[1:0]		
0x31	W	0x40	gate_ibadj[1:0]		vcc_vs[1:0]		src_ibadj	bias_adj[2:0]			
0x32	W	0xe3	otp_slpo ut_en	lvd_en	lvd_adj[1:0]			vdds_trim[2:0]			
0x38	W	0x47	gvcl_trim[6:0]								
0x39	W	0x16	gvdd_trim[6:0]								
0x3A	W	0x3f	vgsp_trim[6:0]								
0x40	W	0x42	gate_switch[7:0]								
0x41	W	0x03					gate_st[3:0]/gate_freq_st[3:0]				
0x43	W	0x1b	gate_ed[6:0]								
0x50	W	0x48	ld2_ed[4:0]						ld1_st[2:0]		
0x51	W	0x45	ld2_st[3:0]					ld1_ed[3:0]			
0x52	W	0x48		dlysel_src	src_cs_alter	ld3_st/avcl_freq_st1[4:0]					
0x53	W	0xc9	avdd_ratio_en	avcl_ratio_en		ld3p_ed/avdd_freq_st1/avdd_ratio_st1[4:0]					
0x54	W	0x0e		pchg_bypass	ld3n_ed[5:0]						
0x55	W	0xce	avdd_freq_en	avcl_freq_en	avcl_ratio_ed1[5:0]						
0x56	W	0x08				avdd_ratio_ed1[4:0]					
0x57	W	0x0c			mv_freq_ed1[5:0]						
0x58	W	0x09		avcl_freq_st2/avcl_ratio_st2/ p_prechg_2nd_st/n_prechg_2nd _st1[1:0]		avdd_freq_st2/avdd_ratio_st2[4:0]/p_prechg_2nd_ed[4:0]					

NV3047E—480(RGB) x272 TFT LCD Single-Chip Driver

Addr	R/W	Default	D7	D6	D5	D4	D3	D2	D1	D0
0x59	W	0x66	source_ib[2:0]			avdd_ratio_ed2[4:0]				
0x5A	W	0x6a	source_ic[2:0]			mv_freq_ed2[4:0]				
0x5B	W	0x0a	chop_sel[2:0]			avcl_ratio_ed2[4:0]				
0x5E	W	0x12			pchg_n_ed[5:0]					
0x60	W	0x00			gam_vrp0[5:0]					
0x61	W	0x0d			gam_vrp1[5:0]					
0x62	W	0x0e			gam_vrp2[5:0]					
0x63	W	0x2c			gam_vrp3[5:0]					
0x64	W	0x2d			gam_vrp4[5:0]					
0x65	W	0x37			gam_vrp5[5:0]					
0x66	W	0x30		gam_prp0[6:0]						
0x67	W	0x3d		gam_prp1[6:0]						
0x68	W	0x09				gam_pkp0[4:0]				
0x69	W	0x11				gam_pkp1[4:0]				
0x6A	W	0x18				gam_pkp2[4:0]				
0x6B	W	0x0b				gam_pkp3[4:0]				
0x6C	W	0x12				gam_pkp4[4:0]				
0x6D	W	0x15				gam_pkp5[4:0]				
0x6E	W	0x13				gam_pkp6[4:0]				
0x6F	W	0x12				gam_pkp7[4:0]				
0x70	W	0x07				gam_pkp8[4:0]				
0x71	W	0x0d				gam_pkp9[4:0]				
0x72	W	0x15				gam_pkp10[4:0]				
0x73	W	0x00		gam_vrn0[5:0]						
0x74	W	0x0d			gam_vrn1[5:0]					
0x75	W	0x0e			gam_vrn2[5:0]					
0x76	W	0x2c			gam_vrn3[5:0]					
0x77	W	0x2d			gam_vrn4[5:0]					
0x78	W	0x37			gam_vrn5[5:0]					
0x79	W	0x30		gam_prn0[6:0]						
0x7A	W	0x3d		gam_prn1[6:0]						
0x7B	W	0x09				gam_pkn0[4:0]				
0x7C	W	0x11				gam_pkn1[4:0]				
0x7D	W	0x18				gam_pkn2[4:0]				
0x7E	W	0x0b				gam_pkn3[4:0]				
0x7F	W	0x12				gam_pkn4[4:0]				
0x80	W	0x15				gam_pkn5[4:0]				
0x81	W	0x13				gam_pkn6[4:0]				
0x82	W	0x12				gam_pkn7[4:0]				
0x83	W	0x07				gam_pkn8[4:0]				
0x84	W	0x0d				gam_pkn9[4:0]				
0x85	W	0x15				gam_pkn10[4:0]				
0x90	W	0xe6	avdd_ss_en	avdd_ratio_sel	avdd_clk_sel[1:0]			avdd_clp_en	avdd_clp[1:0]	
0x91	W	0xe6	avcl_ss_en	avcl_ratio_sel	avcl_clk_sel[1:0]			avcl_clp_en	avcl_clp[1:0]	
0x92	W	0x5d	vgh_clk_sel[1:0]		vgh_ratio_sel[1:0]		vgh_clp_en	vgh_clp[2:0]		
0x93	W	0x5d	vgl_clk_sel[1:0]		vgl_ratio_sel[1:0]		vgl_clp_en	vgl_clp[2:0]		

NV3047E—480(RGB) x272 TFT LCD Single-Chip Driver

Addr	R/W	Default	D7	D6	D5	D4	D3	D2	D1	D0
0x94	W	0x66		vgh_skip_sync	vgh_td[1:0]			vgl_skip_sync	vgl_td[1:0]	
0x95	W	0x3e	esd_func_en		esd_func_sel[1:0]		avdd_fdbk_en	avcl_fdbk_en	mv_clk_sel[1:0]	
0xA0	W	0x8e	abnormal_en				hdir	vdir	sbgr	nbw
0xA1	W	0x80	gate_swap_en	gate_swap_sel[2:0]			pxl_swap		clr_sel	src_odd_even
0xA2	W	0x00				pump_ctrl_en			seri_db_sel[1:0]	
0xDA	R	0x30	Read ID1							
0xDB	R	0x47	Read ID2							
0xDC	R	0xd1	Read ID3							

Note:

When GRB is low, all registers reset to default values.

All commands will be executed at next VSYNC.

7.2. Algorithm

7.2.1. Global Contrast Settings (04h)

Command Set		Global Contrast Settings								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	global_ctr[7:0]								40h
Description	Contrast level setting for each sub-pixel, the step is (1/64)/bit. global_ctr == 0x00 : gain = 0; global_ctr == 0x40: gain = 1 ; (default) global_ctr == 0xFF: gain = 3.98;									
Restriction	-									

7.2.2. Sub-R Contrast Settings (05h)

Command Set		Sub-R Contrast Settings								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	0	sub_red_ctr[6:0]							40h
Description	Contrast level setting for red sub-pixel, the step is (1/256)/bit. sub_red_ctr == 0x00: gain = 0.75; sub_red_ctr == 0x40: gain = 1 ; (default) sub_red_ctr == 0x7F: gain = 1.246;									
Restriction	-									

7.2.3. Sub-B Contrast Settings (06h)

Command Set		Sub-B Contrast Settings								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	0	sub_blue_ctr[6:0]							40h
Description	Contrast level setting for blue sub-pixel, the step is (1/256)/bit. sub_blue_ctr == 0x00: gain= 0.75; sub_blue_ctr == 0x40: gain= 1; (default) sub_blue_ctr == 0x7F: gain = 1.246;									
Restriction	-									

7.2.4. Global Brightness Settings (07h)

Command Set		Global Brightness Settings								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	global_brt[7:0]								40h
Description	Brightness level setting for all sub-pixels, the step is 1/bit. global_ctr == 0x00: addition = -64; global_ctr == 0x40: addition = 0 ; (default) global_ctr == 0xFF: addition = 191;									
Restriction	-									

7.2.5. Sub-R Brightness Settings (08h)

Command Set		Sub-R Brightness Settings								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	0	sub_red_brt[6:0]							40h
Description	Brightness level setting for red sub-pixel, the step is 1/bit. sub_red_ctr == 0x00: addition = -64; sub_red_ctr == 0x40: addition = 0; (default) sub_red_ctr == 0x7F: addition = 63;									
Restriction	-									

7.2.6. Sub-B Brightness Settings (09h)

Command Set		Sub-B Brightness Settings								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	0	sub_blue_brt[6:0]							40h
Description	Brightness level setting for blue sub-pixel, the step is 1/bit. sub_blue_ctr == 0x00: addition = -64; sub_blue_ctr == 0x40: addition = 0; (default) sub_blue_ctr == 0x7F: addition = 63;									
Restriction	-									

7.3. OTP Control Setting

7.3.1. OTP Control (10h)

Command Set		OTP Control								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	otp_ad dr[8]	0	otp_ptm[1:0]		otp_v pp_sel	otp_pr og	otp_w r_en	otp_rd _en	00h
Description	otp_addr[8]: otp address highest bit otp_ptm: otp test mode enable otp_vpp_sel: high voltage seletion for programming otp_prog: otp program enable otp_rd_en: otp read cycle otp_wr_en: otp write cycle									
Restriction	1. Read pulse width time should be smaller than 50us 2. Program pulse width time should be smaller than 300us									

7.3.2. OTP Address (11h)

Command Set		OTP Address								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	otp_addr[7:0]								00h
Description	This command is used to set the OTP address.									
Restriction	-									

7.3.3. OTP Write Data (12h)

Command Set		OTP Write Data								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	otp_wr_dat[7:0]								00h
Description	This command is used to set OTP write data control									
Restriction	-									

7.3.4. SPI Read OTP Data (13h)

Command Set		SPI Read OTP Data								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Read	otp_rd_dat[7:0]								-
Description	This command is used to read otp contents. User should send read sequence by cmd “10” and “11” ,then read cached data by cmd “13” with SPI									
Restriction	-									

7.4. Interface Type and Blanking Porch Control

7.4.1. Interface Type and Polar setting (21h)

Command Set		Interface Type and Polar setting								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	0	auto_d etect	sync_ctrl[1:0]		0	hpol	vpol	pclk_p ol	40h
Description	1> DPI interface has three working mode: sync_de_mode, sync_only_mode, de_only_mode. a. Auto_detect=1'b1, auto switch interface mode according to RGB information b. Auto_detect=1'b0 and sync_ctrl=2'b00, pad "SYNC" will select mode between sync_de_mode and sync_only_mode; c. Auto_detect=1'b0 and sync_ctrl=2'b01, select sync_only_mode d. Auto_detect=1'b0 and sync_ctrl=2'b10, select sync_de_mode e. Auto_detect=1'b0 and sync_ctrl=2'b11, select de_only_mode 2> Hpol / vpol / pclk_pol will change polarity of hs/vs/pclk.									
Restriction	-									

7.4.2. Blanking Porch Control 1 (22h~26h)

Command Set		Blanking Porch Control 1								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
22h	Write							hbp_para[9:8]		00h
23h	Write	hbp_para[7:0]								2bh
24h	Write	hfp_para [7:0]								08h
25h	Write	vbp_para [7:0]								0ch
26h	Write	vfp_para [7:0]								08h
Description	hbp_para[9:0]: It is used to set RGB interface horizontal back porch for parallel 24bits mode hfp_para [7:0]: It is used to set RGB interface horizontal front porch for parallel 24bits mode vbp_para [7:0]: It is used to set RGB interface vertical back porch for parallel 24bits mode vfp_para [7:0]: It is used to set RGB interface front porch for parallel 24bits mode									
Restriction										

7.4.3. Blanking Porph Control 2 (27h~2Bh)

Command Set		Blanking Porch Control 2								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
27h	Write							hbp_ser[9:8]		00h
28h	Write	hbp_ser[7:0]								81h
29h	Write	hfp_ser[7:0]								18h
2Ah	Write	vbp_ser[7:0]								0ch
2Bh	Write	vfp_ser[7:0]								08h
Description	hbp_ser[9:0]: It is used to set RGB interface horizontal back porch for serial 8 bits mode hfp_ser[7:0]: It is used to set RGB interface Horizontal front porch for serial 8 bits mode vbp_ser[7:0]: It is used to set RGB interface vertical back porch for serial 8 bits mode vfp_ser[7:0]: It is used to set RGB interface vertical front porch for serial 8 bits mode									
Restriction	-									

7.5. Power Trimming

7.5.1. IBAS Adjustment (30h)

Command Set		IBAS Adjustment								
Command	Write/Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	avdd_clp_ibadj[1:0]		avcl_clp_ibadj[1:0]		gam_ibadj[1:0]		gam_ldo_ibadj[1:0]		55h
Description	avdd_clp_ibadj[1:0]: Adjust the bias current of AVDD clamp OP.									
	avdd_clp_ibadj[1:0]						Value (uA)			
	00						2.5			
	01						5.0			
	10						7.5			
	11						10.0			
	avcl_clp_ibadj[1:0]: Adjust the bias current of AVCL clamp OP.									
	avcl_clp_ibadj[1:0]						Value (uA)			
	00						2.5			
	01						5.0			
	10						7.5			
	11						10.0			
	gam_ibadj[1:0]: Adjust the bias current of Gamma OP.									
	gam_ibadj[1:0]						Value (uA)			
	00						0.5			
	01						1.0			
10						1.5				
11						2.0				
gam_ldo_ibadj[1:0]: Adjust the bias current of Gamma LDO OP.										
gam_ldo_ibadj[1:0]						Value (uA)				
00						0.5				
01						1.0				
10						1.5				
11						2.0				
Restriction	-									

7.5.2. IBIAS and VCC trimming (31h)

Command Set		IBIAS and VCC trimming								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	gate_ibadj[1:0]		vcc_vs[1:0]		src_ib adj	bias_adj[2:0]			40h
Description	gate_ibadj[1:0]: Adjust the bias current of Gate.									
	gate_ibadj[1:0]						Value (uA)			
	00						1.0			
	01						2.0			
	10						3.0			
	11						4.0			
	vcc_vs[1:0]: VCC trimming.									
	vcc_vs[1:0]						Value (V)			
	00						1.67			
	01						1.80			
10						1.87				
11						2.0				
Description	src_ibadj: no use. Default: 0. The current is 1uA									
	bias_adj[2:0]: Adjust the current. Source.									
	bias_adj[2:0]						Value (uA)			
	000						1			
	001						1.05			
	010						1.1			
	011						1.27			
	100						1.725			
	101						0.96			
	110						0.93			
111						0.78				
Restriction	-									

7.5.3. LVD and VDDS Trimming (32h)

Command Set		LVD and VDDS Trimming																								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default																
1 st Parameter	Write	otp_sl pout_e n	lvd_en	lvd_adj[1:0]		0	vdds_trim[2:0]			E3h																
Description	lvd_en: It is used to enable LVD block.																									
	<table><tr><th>LVD_EN</th><th>Description</th></tr><tr><td>0</td><td>Disable LVD block</td></tr><tr><td>1</td><td>Enable LVD block</td></tr></table>									LVD_EN	Description	0	Disable LVD block	1	Enable LVD block											
	LVD_EN	Description																								
	0	Disable LVD block																								
	1	Enable LVD block																								
	lvd_adj[1:0]: It used to set the Low voltage detector range																									
	<table><tr><th>LVD_ADJ[1:0]</th><th>Value (V)</th></tr><tr><td>00</td><td>2.7</td></tr><tr><td>01</td><td>2.5</td></tr><tr><td>10</td><td>2.2</td></tr><tr><td>11</td><td>1.8</td></tr></table>									LVD_ADJ[1:0]	Value (V)	00	2.7	01	2.5	10	2.2	11	1.8							
	LVD_ADJ[1:0]	Value (V)																								
	00	2.7																								
	01	2.5																								
10	2.2																									
11	1.8																									
vdds_trim[2:0]: Voltage setting of VDDS.																										
<table><tr><th>VDDS_trim[2:0]</th><th>Value (V)</th></tr><tr><td>000</td><td>1.50</td></tr><tr><td>001</td><td>1.60</td></tr><tr><td>010</td><td>1.70</td></tr><tr><td>011</td><td>1.80</td></tr><tr><td>100</td><td>1.90</td></tr><tr><td>101</td><td>1.97</td></tr><tr><td>110</td><td>2.04</td></tr><tr><td>111</td><td>2.11</td></tr></table>									VDDS_trim[2:0]	Value (V)	000	1.50	001	1.60	010	1.70	011	1.80	100	1.90	101	1.97	110	2.04	111	2.11
VDDS_trim[2:0]	Value (V)																									
000	1.50																									
001	1.60																									
010	1.70																									
011	1.80																									
100	1.90																									
101	1.97																									
110	2.04																									
111	2.11																									
Restriction	-																									

7.5.4. GVCL Adjustment (38h)

Command Set		GVCL Adjustment								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	0	gvcl_adj[6:0]							47h
Description	GVCL Voltage setting:									
	gvcl_adj [6:0]	GVCL (V)	gvcl_adj [6:0]	GVCL (V)	gvcl_adj [6:0]	GVCL (V)	gvcl_adj [6:0]	GVCL (V)		
	0100000	-4.4800	0111000	-4.0960	1010000	-3.7120	1101000	-3.3280		
	0100001	-4.4640	0111001	-4.0800	1010001	-3.6960	1101001	-3.3120		
	0100010	-4.4480	0111010	-4.0640	1010010	-3.6800	1101010	-3.2960		
	0100011	-4.4320	0111011	-4.0480	1010011	-3.6640	1101011	-3.2800		
	0100100	-4.4160	0111100	-4.0320	1010100	-3.6480	1101100	-3.2640		
	0100101	-4.4000	0111101	-4.0160	1010101	-3.6320	1101101	-3.2480		
	0100110	-4.3840	0111110	-4.0000	1010110	-3.6160	1101110	-3.2320		
	0100111	-4.3680	0111111	-3.9840	1010111	-3.6000	1101111	-3.2160		
	0101000	-4.3520	1000000	-3.9680	1011000	-3.5840	1110000	-3.2000		
	0101001	-4.3360	1000001	-3.9520	1011001	-3.5680	1110001	-3.1840		
	0101010	-4.3200	1000010	-3.9360	1011010	-3.5520	1110010	-3.1680		
	0101011	-4.3040	1000011	-3.9200	1011011	-3.5360	1110011	-3.1520		
	0101100	-4.2880	1000100	-3.9040	1011100	-3.5200	1110100	-3.1360		
	0101101	-4.2720	1000101	-3.8880	1011101	-3.5040	1110101	-3.1200		
	0101110	-4.2560	1000110	-3.8720	1011110	-3.4880	1110110	-3.1040		
	0101111	-4.2400	1000111	-3.8560	1011111	-3.4720	1110111	-3.0880		
	0110000	-4.2240	1001000	-3.8400	1100000	-3.4560	1111000	-3.0720		
	0110001	-4.2080	1001001	-3.8240	1100001	-3.4400	1111001	-3.0560		
	0110010	-4.1920	1001010	-3.8080	1100010	-3.4240	1111010	-3.0400		
	0110011	-4.1760	1001011	-3.7920	1100011	-3.4080	1111011	-3.0240		
	0110100	-4.1600	1001100	-3.7760	1100100	-3.3920	1111100	-3.0080		
	0110101	-4.1440	1001101	-3.7600	1100101	-3.3760	1111101	-2.9920		
	0110110	-4.1280	1001110	-3.7440	1100110	-3.3600	1111110	-2.9760		
	0110111	-4.1120	1001111	-3.7280	1100111	-3.3440	1111111	-2.9600		
Restriction	-									

7.5.5. GVDD Adjustment (39h)

Command Set		GVDD Adjustment								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	0	gvdd_adj[6:0]							16h
Description	GVDD Voltage setting:									
	gvdd_adj j[6:0]	GVDD (V)	gvdd_adj j[6:0]	GVDD (V)	gvdd_adj j[6:0]	GVDD (V)	gvdd_adj j[6:0]	GVDD (V)		
	0010000	5.9680	0100000	5.7120	0110000	5.4560	1000000	5.2000		
	0010001	5.9520	0100001	5.6960	0110001	5.4400	1000001	5.1840		
	0010010	5.9360	0100010	5.6800	0110010	5.4240	1000010	5.1680		
	0010011	5.9200	0100011	5.6640	0110011	5.4080	1000011	5.1520		
	0010100	5.9040	0100100	5.6480	0110100	5.3920	1000100	5.1360		
	0010101	5.8880	0100101	5.6320	0110101	5.3760	1000101	5.1200		
	0010110	5.8720	0100110	5.6160	0110110	5.3600	1000110	5.1040		
	0010111	5.8560	0100111	5.6000	0110111	5.3440	1000111	5.0880		
	0011000	5.8400	0101000	5.5840	0111000	5.3280	1001000	5.0720		
	0011001	5.8240	0101001	5.5680	0111001	5.3120	1001001	5.0560		
	0011010	5.8080	0101010	5.5520	0111010	5.2960	1001010	5.0400		
	0011011	5.7920	0101011	5.5360	0111011	5.2800	1001011	5.0240		
	0011100	5.7760	0101100	5.5200	0111100	5.2640	1001100	5.0080		
	0011101	5.7600	0101101	5.5040	0111101	5.2480	1001101	4.9920		
	0011110	5.7440	0101110	5.4880	0111110	5.2320	1001110	4.9760		
	0011111	5.7280	0101111	5.4720	0111111	5.2160	1001111	4.9600		
Restriction	-									

7.5.6. VGSP Adjustment (3Ah)

Command Set		VGSP Adjustment								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	0	vgsp_adj[6:0]							3Fh
Description	VGSP Voltage setting:									
	vgsp_ad j[6:0]	VGSP (V)	vgsp_ad j[6:0]	VGSP (V)	vgsp_ad j[6:0]	VGSP (V)	vgsp_ad j[6:0]	VGSP (V)		
	0100000	1.5520	0111000	1.1680	1010000	0.7840	1101000	0.4000		
	0100001	1.5360	0111001	1.1520	1010001	0.7680	1101001	0.3840		
	0100010	1.5200	0111010	1.1360	1010010	0.7520	1101010	0.3680		
	0100011	1.5040	0111011	1.1200	1010011	0.7360	1101011	0.3520		
	0100100	1.4880	0111100	1.1040	1010100	0.7200	1101100	0.3360		
	0100101	1.4720	0111101	1.0880	1010101	0.7040	1101101	0.3200		
	0100110	1.4560	0111110	1.0720	1010110	0.6880	1101110	0.3040		
	0100111	1.4400	0111111	1.0560	1010111	0.6720	1101111	0.2880		
	0101000	1.4240	1000000	1.0400	1011000	0.6560	1110000	0.2720		
	0101001	1.4080	1000001	1.0240	1011001	0.6400	1110001	0.2560		
	0101010	1.3920	1000010	1.0080	1011010	0.6240	1110010	0.2400		
	0101011	1.3760	1000011	0.9920	1011011	0.6080	1110011	0.2240		
	0101100	1.3600	1000100	0.9760	1011100	0.5920	1110100	0.2080		
	0101101	1.3440	1000101	0.9600	1011101	0.5760	1110101	0.1920		
	0101110	1.3280	1000110	0.9440	1011110	0.5600	1110110	0.1760		
	0101111	1.3120	1000111	0.9280	1011111	0.5440	1110111	0.1600		
	0110000	1.2960	1001000	0.9120	1100000	0.5280	1111000	0.1440		
	0110001	1.2800	1001001	0.8960	1100001	0.5120	1111001	0.1280		
	0110010	1.2640	1001010	0.8800	1100010	0.4960	1111010	0.1120		
	0110011	1.2480	1001011	0.8640	1100011	0.4800	1111011	0.0960		
	0110100	1.2320	1001100	0.8480	1100100	0.4640	1111100	0.0800		
	0110101	1.2160	1001101	0.8320	1100101	0.4480	1111101	0.0640		
	0110110	1.2000	1001110	0.8160	1100110	0.4320	1111110	0.0480		
	0110111	1.1840	1001111	0.8000	1100111	0.4160	1111111	0.0320		
Restriction	-									

7.6. Gate Setting

7.6.1. Gate Switch Setting (40h)

Command Set		Gate Switch Setting								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	gate_switch[7:0]								42h
Description	Half-line gate switching point, The step is 4*pclk.									
Restriction	-									

7.6.2. Gate Start Enable Setting (41h)

Command Set		Gate Start Enable Setting								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	0	0	0	0	gate_st[3:0]/gate_freq_st[3:0]				03h
Description	Start point of gate open enable signal, also is switch point of vgh pump frequency from low to high. The step is 8*pcclk.									
Restriction	-									

7.6.3. Gate End Enable Setting (43h)

Command Set		Gate End Enable Setting								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write		gate_ed[6:0]							1bh
Description	End point of gate open enable signal.The step is 8*pcclk.									
Restriction	-									

7.7. Source Ctrl Setting

7.7.1. Source Load Setting 1 (50h)

Command Set		Source Load Setting 1								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	ld2_ed[4:0]					ld1_st[2:0]			48h
Description	ld1_st: Source ld1 signal start point, The step is 4*pclk ld2_ed: Source ld2 signal end point, The step is 4*pclk									
Restriction	-									

7.7.2. Source Load Setting 2 (51h)

Command Set		Source Load Setting 2								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	ld2_st[3:0]				ld1_ed[3:0]				45h
Description	ld2_st: Source ld2 signal start point, The step is 4*pclk ld1_ed: Source ld1 signal end point, The step is 4*pclk									
Restriction	-									

7.7.3. Source Load Setting 3 (52h)

Command Set		Source Load Setting 3								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	0	dlysel_src	src_cs_alter	ld3_st/avcl_freq_st1[4:0]					48h
Description	dlysel_src: internal delay time selection 0: delay time=150ns 1: delay time=125ns src_cs_alter: source charge sharing setting ld3_st: source ld3 start point, the step is 4*pcclk avcl_freq_st1: switching point of avcl pump frequency during first half-line, sharing the same register with ld3_st, the step is 4*pcclk									
Restriction	-									

7.7.4. Source Load Setting 4 (53h)

Command Set		Source Load Setting 4								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	avdd_r atio_e n	avcl_r atio_e n	0	ld3p_ed/avdd_freq_st1/avdd_ratio_st1[4:0]					c9h
Description	avdd_ratio_en : Enable signal for dynamic switching of avdd pump ratio; avcl_ratio_en : Enable signal for dynamic switching of avcl pump ratio; ld3p_ed: End point of positive source ld3, the step is 8*pcclk; avdd_ratio_st1:Switching start point of first half-line avdd pump ratio,sharing the same register with ld3p_ed, the step is 8*pcclk;									
Restriction	-									

7.7.5. Source Load Setting 5 (54h)

Command Set		Source Load Setting 5								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	0	pchg_ bypass	ld3n_ed[5:0]						0Eh
Description	pchg_bypass: half-line precharge bypass control ld3n_ed: negative ld3 enable signal end position setting, the step is 8*plk									
Restriction	-									

7.7.6. Source Charging Setting 1 (55h)

Command Set		Source Charging Setting 1								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	avdd_f req_en	avcl_f req_en	avcl_ratio_ed1[5:0]						ceh
Description	avdd_freq_en: avdd frequency switching enable control for positive source charging avcl_freq_en: avcl frequency switching enable control for negative source charging avcl_ratio_ed1: end position setting for first half-line avcl pump ratio switching enable, the step is 8*pclk									
Restriction	-									

7.7.7. Source Charging Setting 2 (56h)

Command Set		Source Charging Setting 2								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	0	0	0	avdd_ratio_ed1[4:0]					08h
Description	avdd_ratio_ed1: the end position setting of the first half-line for avdd pump ratio switching enable, The step is 16*pcclk									
Restriction	-									

7.7.8. Source Charging Setting 3 (57h)

Command Set		Source Charging Setting 3								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	0	0	avdd_avcl_freq_ed1[5:0]						0ch
Description	avdd_avcl_freq_ed1[5:0] is the end position setting of AVDD, AVCL frequency switching, The step 16*pc1k									
Restriction	-									

7.7.9. Source Charging Setting 4 (58h)

Command Set		Source Charging Setting 4								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	0	avcl_freq_st2/avcl_ratio_st2/ p_prechg_2nd_start[1:0]		avdd_freq_st2/avdd_ratio_st2[4:0]/p_prechg_2nd_ed[4:0]					09h
Description	avcl_freq_st2: avcl frequency switching start point for second half-line source charging, the step is 4*pcclk; avcl_ratio_st2: avcl pump ratio switching start point for second half-line , sharing bits with avcl_freq_st2, the step is 4*pcclk; p_prechg_2nd_st: Second half-line positive source precharge starting position,sharing bits with avcl_freq_st2, the step is 4*pcclk; n_prechg_2nd_st: Second half-line negative source precharge starting position,sharing bits with avcl_freq_st2, the step is 4*pcclk; avdd_freq_st2: avdd frequency switching start point for second half-line source charging, the step is 4*pcclk; avdd_ratio_st2: avdd pump ratio switching start point for second half-line, sharing bits with avdd_freq_st2, the step is 4*pcclk; p_prechg_2nd_ed: Second half-line negative source precharge ending position, sharing bits with avdd_freq_st2, the step is 4*pcclk;									
Restriction	-									

7.7.10. Source Setting 1 (59h)

Command Set		Source Setting 1								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	source_ib[2:0]			avdd_ratio_ed2[4:0]					66h
Description	source_ib[2:0]: source ibias current setting									
					source_ib[2:0]		Bias current(μA)			
					000		0.5			
					001		1.0			
					010		1.5			
					011		2.0			
					100		2.5			
					101		3.0			
					110		3.5			
					111		4.0			
	avdd_ratio_ed2: avdd pump ratio ending position for second half-line, the step is 16*pcclk									
Restriction	-									

7.7.11. Source Setting 2 (5Ah)

Command Set		Source Setting 2								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	source_ic[2:0]			avdd_avcl_freq_ed2[4:0]					6ah
Description	source_ic[2:0]: source bias current setting									
	source_ib[2:0]				Bias current(μA)					
	000				0.5					
	001				1.0					
	010				1.5					
	011				2.0					
	100				2.5					
	101				3.0					
	110				3.5					
	111				4.0					
	avdd_avcl_freq_ed2[4:0]: Ending position for second half-line mv pump frequency switching, the step is 16*pclk									
Restriction	-									

7.7.12. Source Setting 3 (5Bh)

Command Set		Source Setting 3								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	chop_sel[2:0]			avcl_ratio_ed2[4:0]					0ah
Description	chop_sel: source chopping control. 3'b000: one line inversion, two frame switch initial polarity 3'b001: two line inversion, two frame switch initial polarity 3'b010: four line inversion, two frame switch initial polarity 3'b011: eight line inversion, two frame switch initial polarity 3'b100: sixteen line inversion, two frame switch initial polarity avcl_ratio_ed2: avcl pump ratio ending positon for second half-line,step is 8*pcclk									
Restriction	-									

7.7.13. Source Setting 4 (5Eh)

Command Set		Source Setting 4								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	0	0	pchg_n_ed[5:0]						12h
Description	pchg_n_ed: Ending position setting for negative source pre-charge									
Restriction	-									

7.8. Gamma P Selection (60h~72h)

Command Set		Gamma P Selection								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
60h	Write	0	0	gam_vrp0[5:0]						0x00
61h	Write	0	0	gam_vrp1[5:0]						0x0d
62h	Write	0	0	gam_vrp2[5:0]						0x0e
63h	Write	0	0	gam_vrp3[5:0]						0x2c
64h	Write	0	0	gam_vrp4[5:0]						0x2d
65h	Write	0	0	gam_vrp5[5:0]						0x37
66h	Write	0	gam_prp0[6:0]							0x30
67h	Write	0	gam_prp1[6:0]							0x3d
68h	Write	0	0	0	gam_pkp0[4:0]					0x09
69h	Write	0	0	0	gam_pkp1[4:0]					0x11
6Ah	Write	0	0	0	gam_pkp2[4:0]					0x18
6Bh	Write	0	0	0	gam_pkp3[4:0]					0x0b
6Ch	Write	0	0	0	gam_pkp4[4:0]					0x12
6Dh	Write	0	0	0	gam_pkp5[4:0]					0x15
6Eh	Write	0	0	0	gam_pkp6[4:0]					0x13
6Fh	Write	0	0	0	gam_pkp7[4:0]					0x12
70h	Write	0	0	0	gam_pkp8[4:0]					0x07
71h	Write	0	0	0	gam_pkp9[4:0]					0x0d
72h	Write	0	0	0	gam_pkp10[4:0]					0x15

7.9. Gamma N Selection (73h~85h)

Command Set		Gamma N Selection								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
73h	Write	0	0	gam_vrn0[5:0]						0x00
74h	Write	0	0	gam_vrn1[5:0]						0x0d
75h	Write	0	0	gam_vrn2[5:0]						0x0e
76h	Write	0	0	gam_vrn3[5:0]						0x2c
77h	Write	0	0	gam_vrn4[5:0]						0x2d
78h	Write	0	0	gam_vrn5[5:0]						0x37
79h	Write	0	gam_prn0[6:0]							0x30
7Ah	Write	0	gam_prn1[6:0]							0x3d
7Bh	Write	0	0	0	gam_pkn0[4:0]					0x09
7Ch	Write	0	0	0	gam_pkn1[4:0]					0x11
7Dh	Write	0	0	0	gam_pkn2[4:0]					0x18
7Eh	Write	0	0	0	gam_pkn3[4:0]					0x0b
7Fh	Write	0	0	0	gam_pkn4[4:0]					0x12
80h	Write	0	0	0	gam_pkn5[4:0]					0x15
81h	Write	0	0	0	gam_pkn6[4:0]					0x13
82h	Write	0	0	0	gam_pkn7[4:0]					0x12
83h	Write	0	0	0	gam_pkn8[4:0]					0x07
84h	Write	0	0	0	gam_pkn9[4:0]					0x0d
85h	Write	0	0	0	gam_pkn10[4:0]					0x15

7.10. Pump control

7.10.1. AVDD Control (90h)

Command Set		AVDD control								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	avdd_ss_en	avdd_ratio_sel	avdd_clk_sel[1:0]		0	avdd_clp_en	avdd_clp_adj[1:0]		E6h
Description	AVDD_SS_EN: AVDD Pump soft start enable signal.									
	AVDD_SS_EN				Description					
	0				Disable soft start					
	1				Enable soft start					
	AVDD_RATIO_SEL: AVDD Pump ratio select signal.									
	AVDD_RATIO_SEL				AVDD					
	0				PVDDX2					
	1				PVDDX3					
	AVDD_CLK_SEL[1:0]: AVDD clock frequency adjustment									
	AVDD_CLK_SEL[1:0]				Frequency(MHz)					
	00				F _{osc} /1					
	01				F _{osc} /2					
	10				F _{osc} /4					
	11				F _{osc} /8					
	AVDD_CLP_EN: AVDD Pump clamp enable signal									
	AVDD_CLP_EN				Description					
	0				Disable clamp					
	1				Enable clamp					
	AVDD_CLP_ADJ[1:0]: AVDD level adjustment									
	AVDD_CLP_ADJ[1:0]				AVDD(V)					
	00				5.53					
	01				5.73					
	10				6.12					
	11				6.32					
Restriction	-									

7.10.2. AVCL Control (91h)

Command Set		AVCL control								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	avcl_s s_en	avcl_r atio_s el	avcl_clk_sel[1:0]		0	avcl_c lp_en	avcl_clp_adj[1:0]		E6h
Description	AVCL_SS_EN: AVCL Pump soft start enable signal.									
	AVCL_SS_EN				Description					
	0				Disable soft start					
	1				Enable soft start					
	AVCL_RATIO_SEL: AVCL Pump ratio select signal.									
	AVCL_RATIO_SEL				AVCL					
	0				PVDDX-1					
	1				PVDDX-2					
	AVCL_CLK_SEL[1:0]: AVCL clock frequency adjustment									
	AVCL_CLK_SEL[1:0]				Frequency(MHz)					
	00				F _{osc} /1					
	01				F _{osc} /2					
	10				F _{osc} /4					
	11				F _{osc} /8					
	AVCL_CLP_EN: AVCL Pump clamp enable signal									
	AVCL_CLP_EN				Description					
	0				Disable clamp					
	1				Enable clamp					
	AVCL_CLP_ADJ[1:0]: AVCL level adjustment									
	AVCL_CLP_ADJ[1:0]				AVCL(V)					
00				-3.96						
01				-4.15						
10				-4.55						
11				-4.74						
Restriction	-									

7.10.3. VGH Control (92h)

Command Set		VGH control								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	vgh_clk_sel[1:0]]		vgh_ratio_sel[1:0] 0]		vgh_clp_en	vgh_clp_adj[2:0]			5dh
Description	VGH_CLK_SEL[1:0]: VGH clock frequency adjustment									
	VGH_CLK_SEL[1:0]					Frequency(MHz)				
	00					F _{osc} /1				
	01					F _{osc} /2				
	10					F _{osc} /4				
	11					F _{osc} /8				
	VGH_RATIO_SEL[1:0]: VGH Pump ratio select signal.									
	VGH_RATIO_SEL[1:0]					VGH				
	00					PVDDX6				
	01					PVDDX7				
	10					PVDDX8				
	11					PVDDX8				
	VGH_CLP_EN: VGH Pump clamp enable signal									
	VGH_CLP_EN					Description				
	0					Disable clamp				
	1					Enable clamp				
	VGH_CLP_ADJ[2:0]: VGH level adjustment									
	VGH_CLP_ADJ[2:0]					VGH(V)				
	000					13.25				
	001					13.655				
	010					14.06				
	011					14.465				
	100					14.87				
	101					15.275				
	110					15.68				
	111					16.085				
Restriction	-									

7.10.4. VGL Control (93h)

Command Set		VGL control								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	vgl_clk_sel[1:0]		vgl_ratio_sel[1:0]		vgl_clp_en	vgl_clp_adj[2:0]			5dh
Description	VGL_CLK_SEL[1:0]: VGL clock frequency adjustment									
	VGL_CLK_SEL[1:0]				Frequency(MHz)					
	00				F _{osc} /1					
	01				F _{osc} /2					
	10				F _{osc} /4					
	11				F _{osc} /8					
	VGL_RATIO_SEL[1:0]: VGL Pump ratio select signal.									
	VGL_RATIO_SEL[1:0]				VGL					
	00				PVDDX-4					
	01				PVDDX-5					
	10				PVDDX-6					
	11				PVDDX-6					
	VGL_CLP_EN: VGL Pump clamp enable signal									
	VGL_CLP_EN				Description					
	0				Disable clamp					
	1				Enable clamp					
	VGL_CLP_ADJ[2:0]: VGL level adjustment									
	VGL_CLP_ADJ[2:0]				VGL(V)					
	000				-10.83					
	001				-10.425					
	010				-10.02					
	011				-9.615					
	100				-9.21					
	101				-8.805					
	110				-8.4					
	111				-7.995					
Restriction	-									

7.10.5. HV Pump Control (94h)

Command Set		HV Pump Control								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	0	vgh_s kip_sy nc	vgh_non_td_sel[1:0]		0	vgl_sk ip_syn c	vgl_non_td_sel[1:0]		66h
Description	VGH_SKIP_SYNC: VGH feedback use clock sample or not									
	VGH_SKIP_SYNC					Description				
	0					Do not sample				
	1					Sample				
	VGH_NON_TD_SEL[1:0]: VGH pump nonoverlap time adjustment									
	VGH_NON_TD_SEL[1:0]					Time(ns)				
	00					2				
	01					4				
	10					6				
	11					8				
	VGL_SKIP_SYNC: VGL feedback use clock sample or not									
	VGL_SKIP_SYNC					Description				
	0					Do not sample				
	1					Sample				
	VGL_NON_TD_SEL[1:0]: VGL pump nonoverlap time adjustment									
	VGL_NON_TD_SEL[1:0]					Time(ns)				
	00					2				
	01					4				
	10					6				
	11					8				
Restriction	-									

7.10.6. ESD Function (95h)

Command Set		ESD Function																	
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default									
1 st Parameter	Write	esd_func_en	0	esd_func_sel[1:0]		avdd_fdbk_en	avcl_fdbk_en	mv_clk_sel[1:0]		3eh									
Description	esd_func_en: esd function enable, 1'b1 = “ON” , 1'b0 = “OFF”;																		
	esd_func_sel: select one from four input ESD check results;																		
	avdd_fdbk_en: Analog realtime feedback signal for half-line avdd pump clock switching finishing point																		
	avcl_fdbk_en: Analog realtime feedback signal for half-line avcl pump clock switching finishing point																		
	mv_clk_sel: gamma pump clk frequency selection																		
	<table><tr><th>mv_clk_sel[1:0]</th><th>frequency</th></tr><tr><td>2'b00</td><td>F_{osc}</td></tr><tr><td>2'b01</td><td>F_{osc}/2</td></tr><tr><td>2'b10</td><td>F_{osc}/4</td></tr><tr><td>2'b11</td><td>F_{osc}/8</td></tr></table>					mv_clk_sel[1:0]	frequency	2'b00	F _{osc}	2'b01	F _{osc} /2	2'b10	F _{osc} /4	2'b11	F _{osc} /8				
mv_clk_sel[1:0]	frequency																		
2'b00	F _{osc}																		
2'b01	F _{osc} /2																		
2'b10	F _{osc} /4																		
2'b11	F _{osc} /8																		
Restriction	-																		

7.11. Display Control

7.11.1. Panel Scan Control (A0h)

Command Set		Panel Scan Control								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	abnormal_en	0	0	0	hdir	vdir	sbgr	nbw	8eh
Description	abnormal_en: pclk-stop function enable hdir: internal control for source inverse scanning. vdir: internal control for gate inverse scanning. sbgr: exchange blue and red subpixel nbw: invert all 24bit RGB data									
Restriction	-									

7.11.2. Dual Gate Switch Control (A1h)

Command Set		Dual Gate Switch Control								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	gate_s wap_e n	gate_swap_sel[2:0]			pxl_s wap	0	clr_sel	src_od d_eve n	80h
Description	gate_swap_en : dual gate open sequence switching enable gate_swap_sel : select gate swap mode									
	gate_swap_sel[2:0]				Detail					
	3'b000				0->1->3->2					
	3'b001				frame 0 : 0->1->2->3 frame 1 : 1->0->3->2					
	3'b010				frame 0,1 : 0->1->2->3 frame 2,3 : 1->0->3->2					
	3'b011				frame0 : 0->1->3->2 frame1 : 1->0->2->3					
	3'b100				frame 0,1: 0->1->3->2 frame 2,3: 1->0->2->3					
	other				same as 3'b000					
	Restriction	-								

7.11.3. DPI Serial 8 bit Mux (A2h)

Command Set		DPI Serial Data Mux								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Write	0	0	0	pump _ctrl_e n	0	0	seri_db_sel[1:0]		00h
Description	pump_ctrl_en: Control all power bypass function. If set “0”, bypass function is invalid. serial_db_sel: Select which 8bit is used to serial DPI mode.									
	seri_db_sel[1:0]				Data Bus for Serial Mode					
	2'b00				DB[15:8]					
	2'b11				DB[15:8]					
	2'b01				DB[23:16]					
	2'b10				DB[7:0]					
Restriction	-									

7.12. Read Register

7.12.1. Read Chip ID1 (DAh)

Command Set		Read Chip ID1								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Read	Read ID1								30h
Description	Read chip id1									
Restriction	-									

7.12.2. Read Chip ID2 (DBh)

Command Set		Read Chip ID2								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Read	Read ID2								47h
Description	Read chip id 2									
Restriction	-									

7.12.3. Read Chip ID3 (DCh)

Command Set		Read Chip ID3								
Command	Write/ Read	D7	D6	D5	D4	D3	D2	D1	D0	Default
1 st Parameter	Read	Read ID3								D1h
Description	Read chip id 3									
Restriction	-									

8. Electrical specifications

8.1 Absolute Maximum Ratings

Item	Symbol	Rating	Unit
Power Supply Voltage	VDD	- 0.3 ~ +4.6	V
IO Supply Voltage	VDDI	- 0.3 ~ +4.6	V
Charge Pump Supply Voltage	PVDD	- 0.3 ~ +4.6	V
Logic Input Voltage Range	VIN	-0.3 ~ VDDI + 0.3	V
Logic Output Voltage Range	VO	-0.3 ~ VDDI + 0.3	V
Operating Temperature Range	TOPR	-30 ~ +85	°C
Storage Temperature Range	TSTG	-40 ~ +125	°C

Note: If one of the above items is exceeded its maximum limitation momentarily, the quality of the product may be degraded. Absolute maximum limitation, therefore, specify the values exceeding which the product may be physically damaged. Be sure to use the product within the recommend range.

8.2. DC Characteristics

8.2.1. Recommended Operating Range

Item	Symbol	Min.	Typ.	Max.	Unit	Conditions
Supply Voltage	VDD	3	3.3	3.6	V	
IO Supply Voltage	VDDI	1.65	-	VDD	V	
Charge Pump Supply Voltage	PVDD	3	3.3	3.6	V	
NVM Supply Voltage	VPP	7.4	7.5	7.6	V	

8.2.2. DC Characteristics for Digital Circuit

Item	Symbol	Min.	Typ.	Max.	Unit	Conditions
Logic-High Input Voltage	V _{ih}	0.7V _{DDI}	-	V _{DDI}	V	V _{DDI} =3.3V
Logic-Low Input Voltage	V _{il}	DGND	-	0.3V _{DDI}	V	V _{DDI} =3.3V
Logic-High Output Voltage	V _{oh}	V _{DDI} -0.4	-	V _{DDI}	V	V _{DDI} =3.3V
Logic-Low Output Voltage	V _{ol}	DGND	-	DGND+0.4	V	V _{DDI} =3.3V

8.2.3. DC Characteristics for Analog Circuit

Item	Symbol	Min.	Typ.	Max.	Unit	Conditions
Positive High-voltage power	VGH	13	15	16	V	PVDD=3.3V
Negative High-voltage power	VGL	-10	-10	-7	V	PVDD=3.3V
Output Voltage Deviation	Vod		±35	±45	mV	
Standby Current	Isc			50	uA	VDD=PVDD=3.3V
Operation Current	Ioc		20		mA	No Load, VDD=VDDI= PVDD=3.3V @ FR=60Hz


8.3. AC Characteristics

VDD=VDDI= 3.3V, AGND= 0V


Item	Symbol	Min.	Typ.	Max.	Unit	Conditions
System operation timing						
VDD power source slew time	TPOR			20	ms	From 0V to 99% VDD
GRB pulse width	tRSTW	10	50		us	R=10Kohm, C=1uF
Input/ Output timing						
CLK pulse duty	Tcw	40	50	60	%	
Hsync width	Thw	1			DCLK	
Hsync period	Th	55	60	65	us	
Vsync setup time	Tvst	12			ns	
Vsync hold time	Tvhd	12			ns	
Hsync setup time	Thst	12			ns	
Hsync hold time	Thhd	12			ns	
Data setup time	Tdsu	12			ns	
Data hold time	Tdhd	12			ns	
DE setup time	Tdest	12			ns	
DE setup time	Tdehd	12			ns	
SD output stable time	Tst			12	us	Output settled within +20Mv Loading =6.8k+28.2pF
GD output rise and fall time	Tgst			6	us	Output settled (5%~95%), Loading = 4.7k+29.8pF
3-wire serial communication						
Delay between CSB and Vsync	Tcv	1			us	
CS input setup time	Ts0	50			ns	
Serial data input setup time	Ts1	50			ns	
CS input hold time	Th0	50			ns	
Serial data input hold time	Th1	50			ns	
SCL pulse high width	Twh1	50			ns	
SCL pulse low width	Twl1	50			ns	
CS pulse high width	Tw2	400			ns	

8.4. AC Timing Diagram

8.4.1. Clock and Data Input Timing Diagram

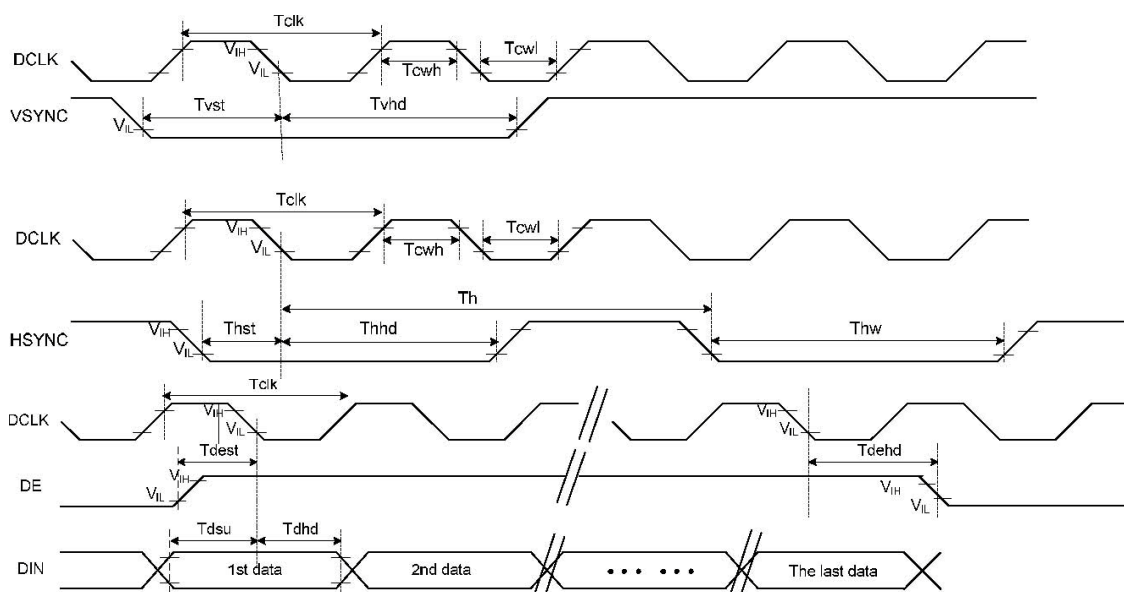

8.4.2. 3-Wire Communication Timing Diagram

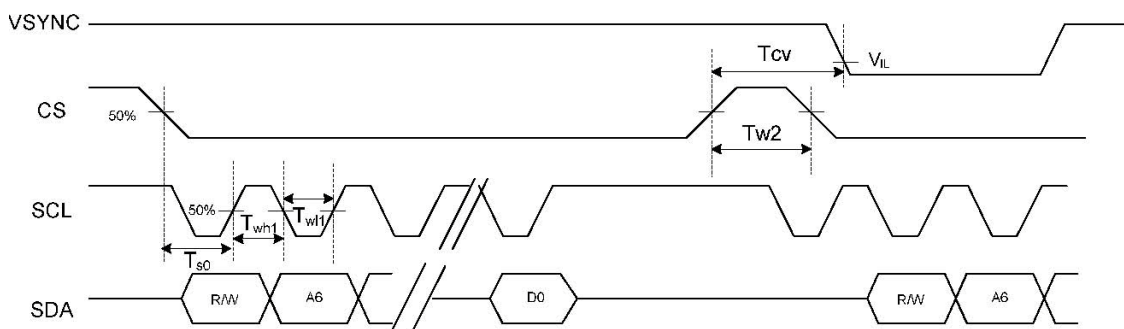

9. INPUT DATA FORMAT

9.1. RGB Input Timing Table

9.1.1. Parallel 24-bit RGB Timing Table

Item		Symbol	Min.	Typ.	Max.	Unit	Remark
DCLK Frequency		Fclk	8	9	12	MHz	
DCLK Period		Tclk	83	111	125	ns	
Frame Pate		FR			75	Hz	
Line Period		Tlp	24			us	
HSYNC	Period Time	Th		531		DCLK	
	Display Period	Thdisp		480		DCLK	
	Back Porch	Thbp		43		DCLK	By H_Blanking setting
	Front Porch	Thfp		8		DCLK	
	Pulse Width	Thw		4		DCLK	
VSYNC	Period Time	Tv		292		H	
	Display Period	Tvdisp		272		H	
	Back Porch	Tvbp		12		H	By V_Blanking setting
	Front Porch	Tvfp		8		H	
	Pulse Width	Tvw		4		H	

Note:

1. It is necessary to keep Tvbp =12, Tvfp = 8 , Twv = 4 and Thbp = 43, Thfp = 8 Thw = 4 in sync mode.
2. The Max Value and Min Value of porch must satisfy the range of Frame Pate and Line Period
3. It is necessary to keep Thbp>10, Tvbp+Tvfp<128


9.1.2. Serial 8-bit RGB Timing Table

Item		Symbol	Min.	Typ.	Max.	Unit	Remark
DCLK Frequency		Fclk	24	27	30	MHz	
DCLK Period		Tclk	33	37	42	ns	
Frame Pate		FR			75	Hz	
Line period		Lp	24			us	
HSYNC	Period Time	Th		1491		DCLK	
	Display Period	Thdisp		1440		DCLK	
	Back Porch	Thbp		43		DCLK	By H_Blanking setting
	Front Porch	Thfp		8		DCLK	
	Pulse Width	Thw		4		DCLK	
VSYNC	Period Time	Tv		292		H	
	Display Period	Tvdisp		272		H	
	Back Porch	Tvbp		12		H	By V_Blanking setting
	Front Porch	Tvfp		8		H	
	Pulse Width	Tvw		4		H	


Note:

1. It is necessary to keep Tvbp =12, Tvfp = 8 , Tw = 4 and Thbp = 43, Thfp = 8 Thw = 4 in sync mode.
2. The Max Value and Min Value of porch must satisfy the range of Frame Pate and Line Period
3. It is necessary to keep Thbp>10, Tvbp+Tvfp<128

9.2. SYNC Mode Timing Diagram

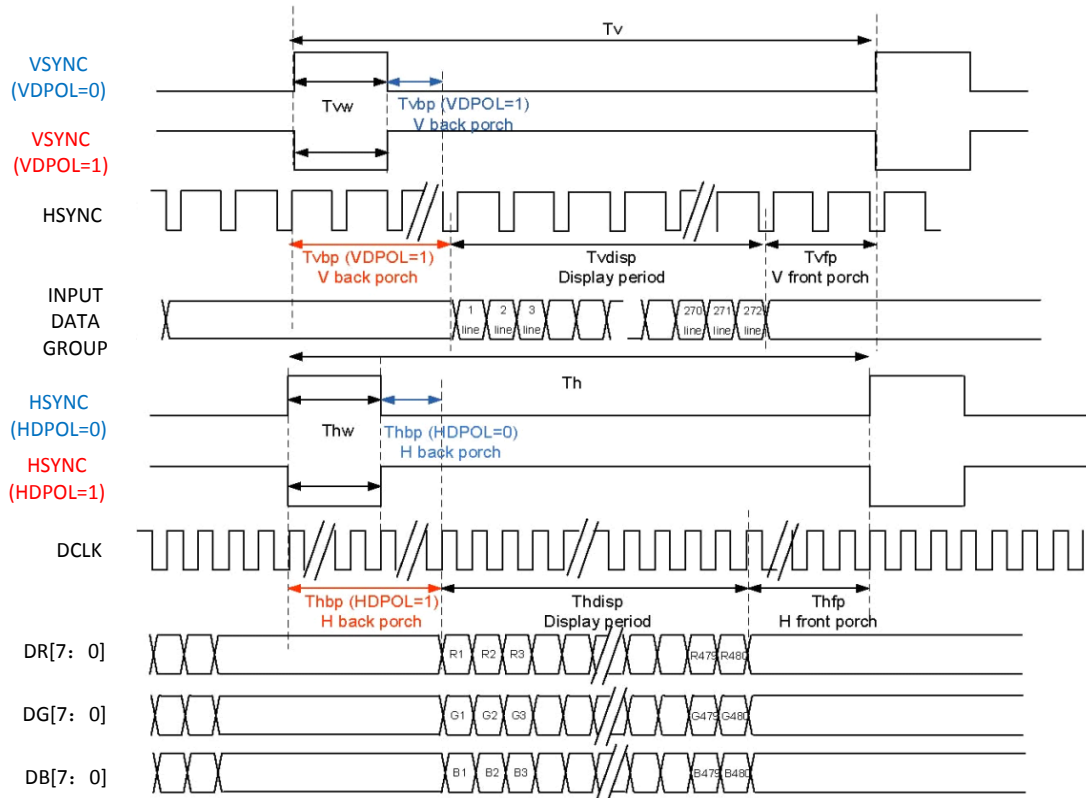


9.3. SYNC-DE Mode Timing Diagram

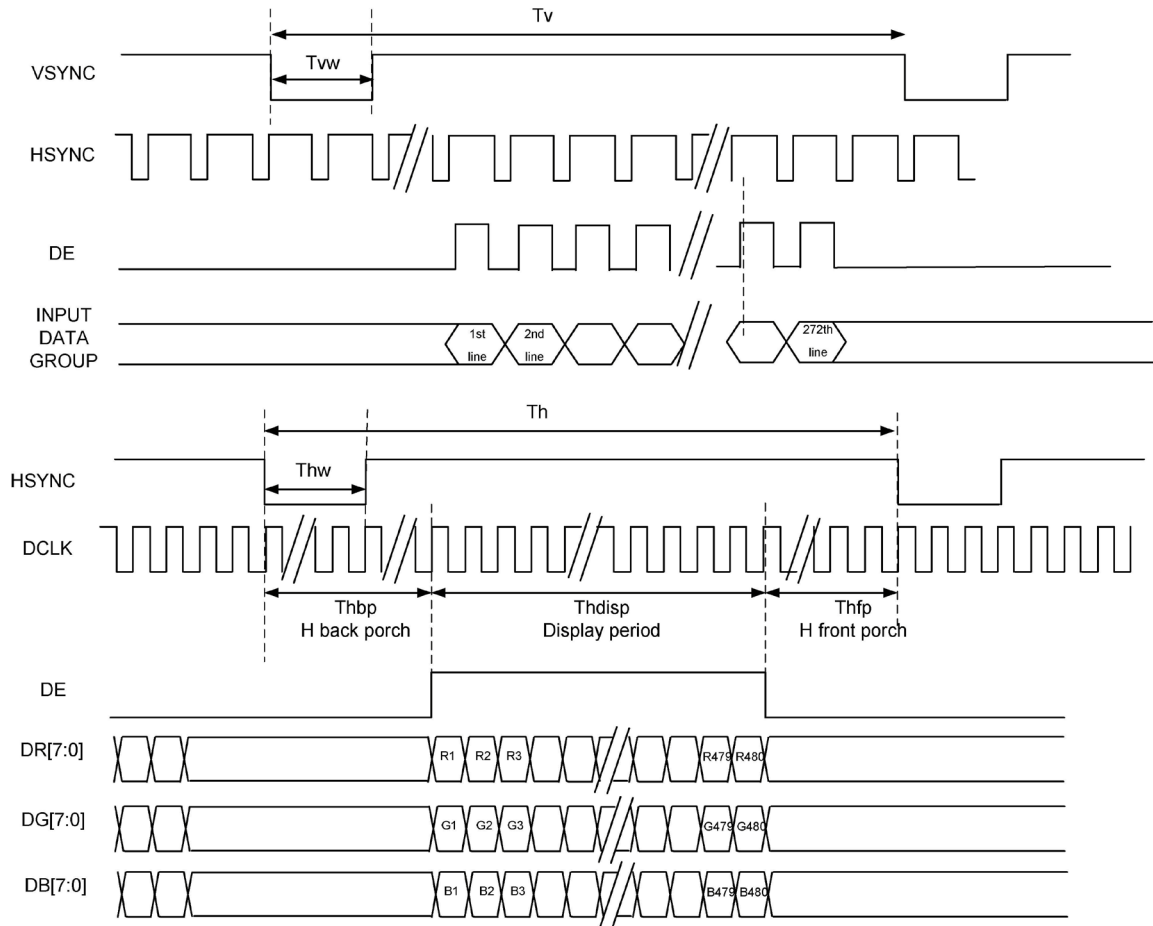


10. Input color format application circuit


10.1. 16.7M Input Color Format

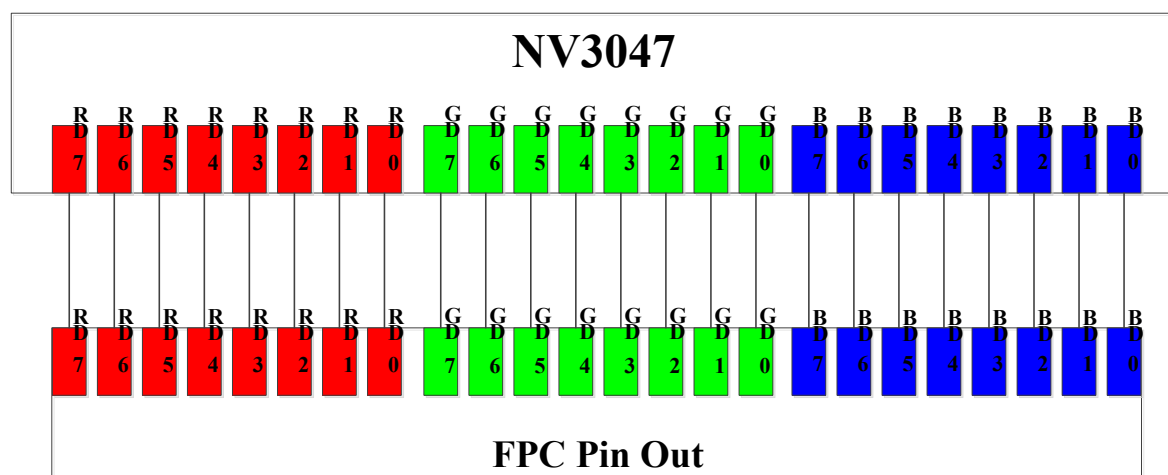


10.2. 262K Input Color Format

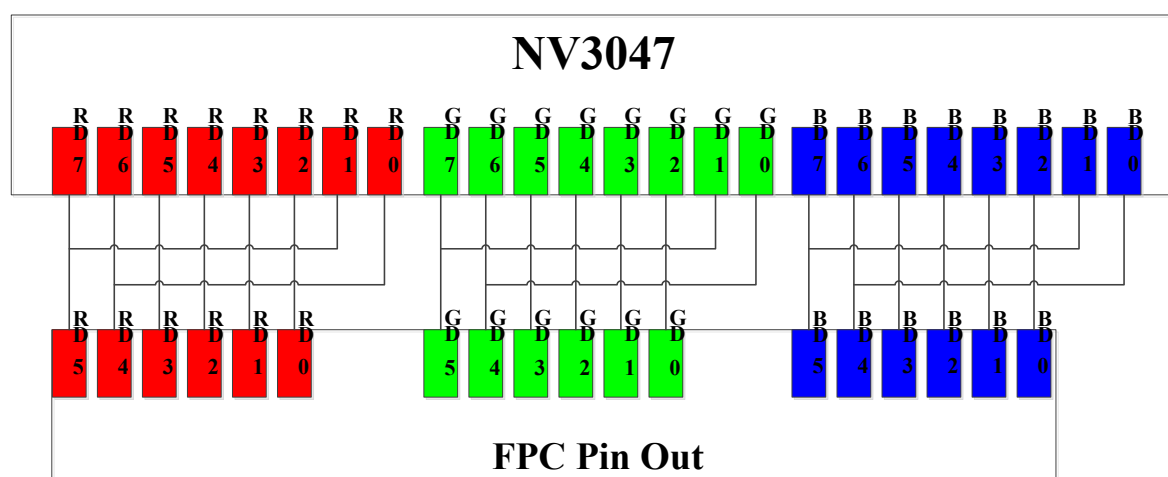

10.3. 65K Input Color Format

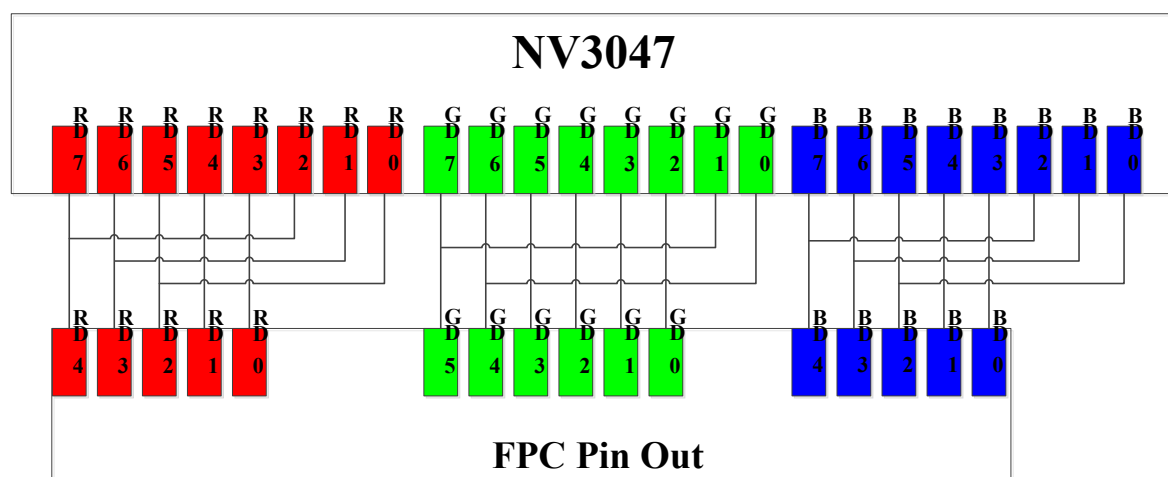


10.4. 4K Input Color Format

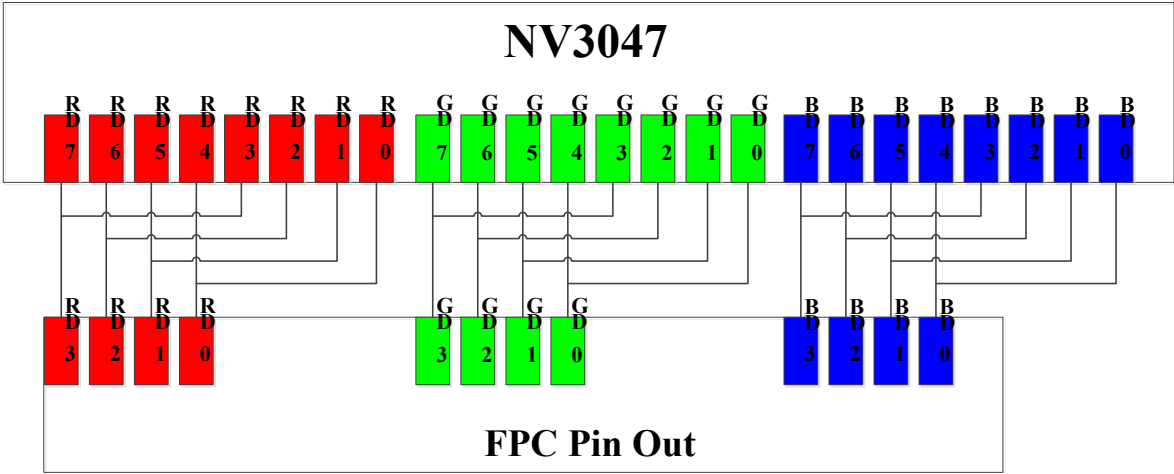


11. FPC Application circuit


11.1. Parallel RGB SYNC-DE Mode Reference Circuit

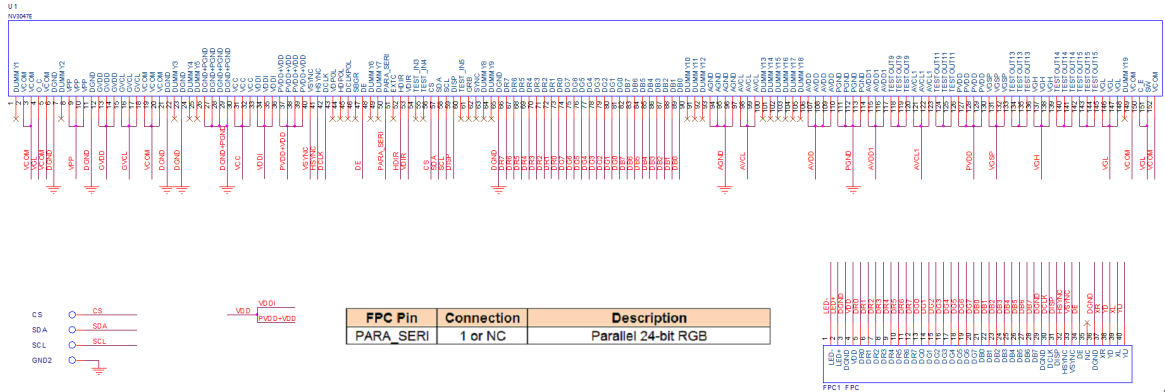


11.2. Parallel RGB SYNC Mode Reference Circuit

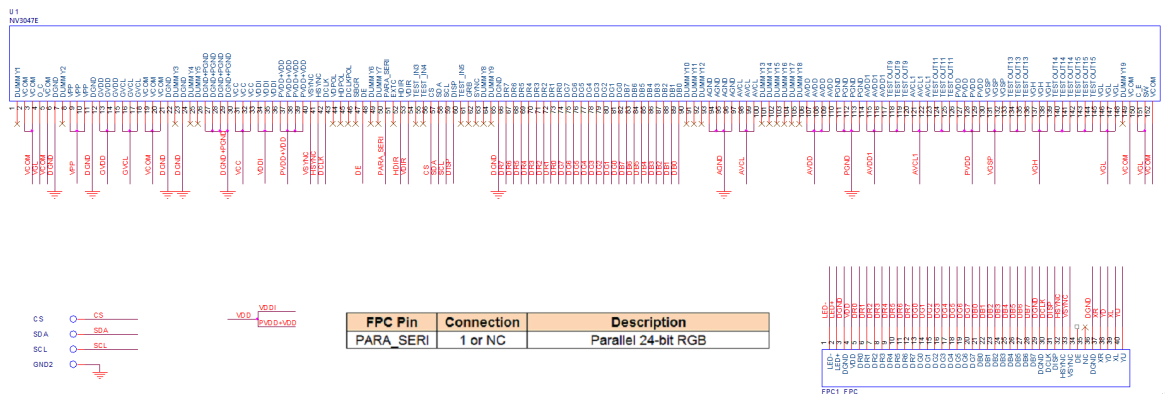


11.3. Parallel RGB DE Mode Reference Circuit

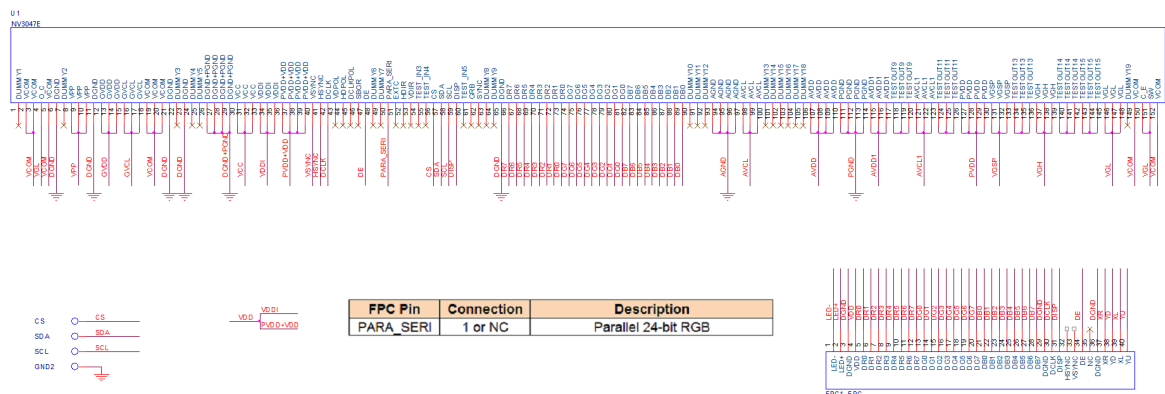


11.4. Serial RGB SYNC-DE Mode Reference Circuit

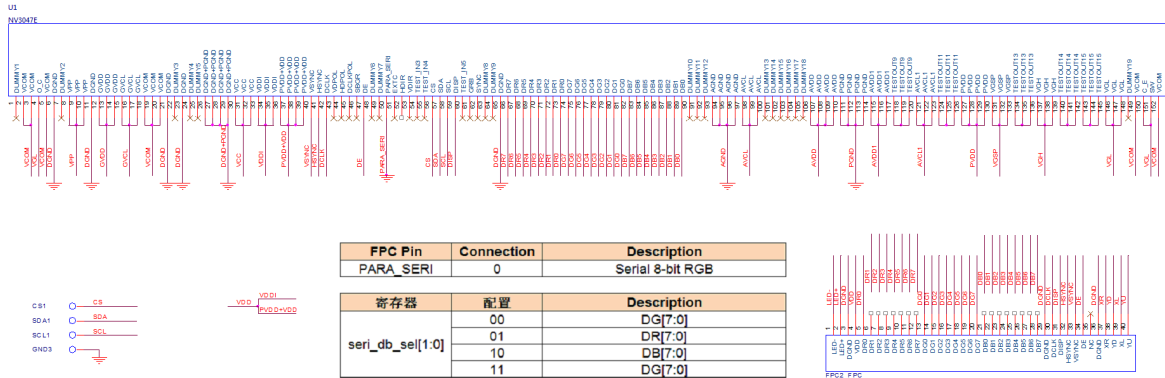

11.5. Serial RGB SYNC Mode Reference Circuit

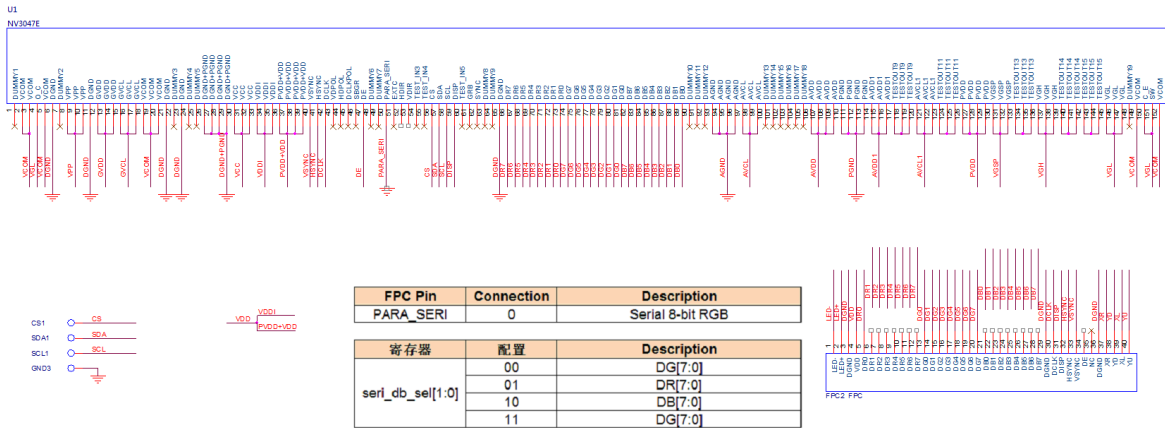


11.6. Serial RGB DE Mode Reference Circuit

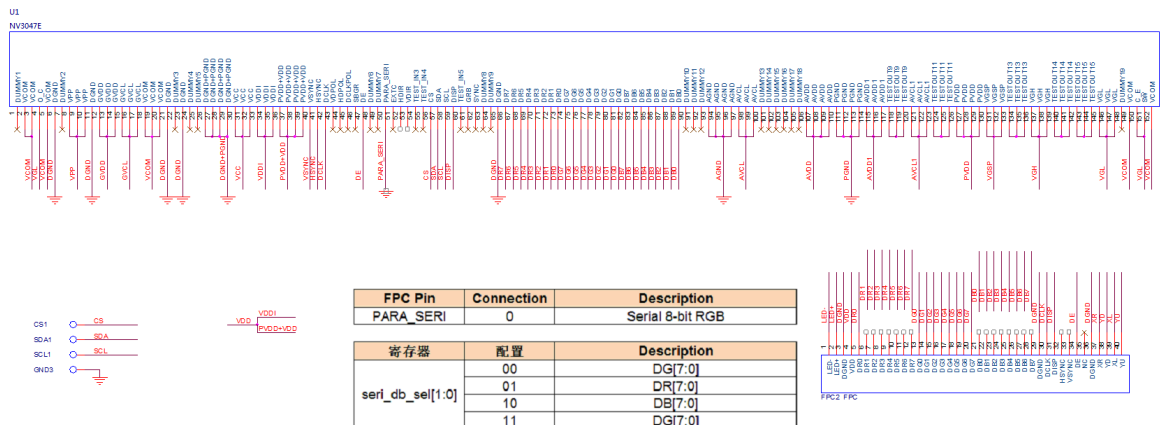


12. Power on/off sequence

12.1. Power On Sequence

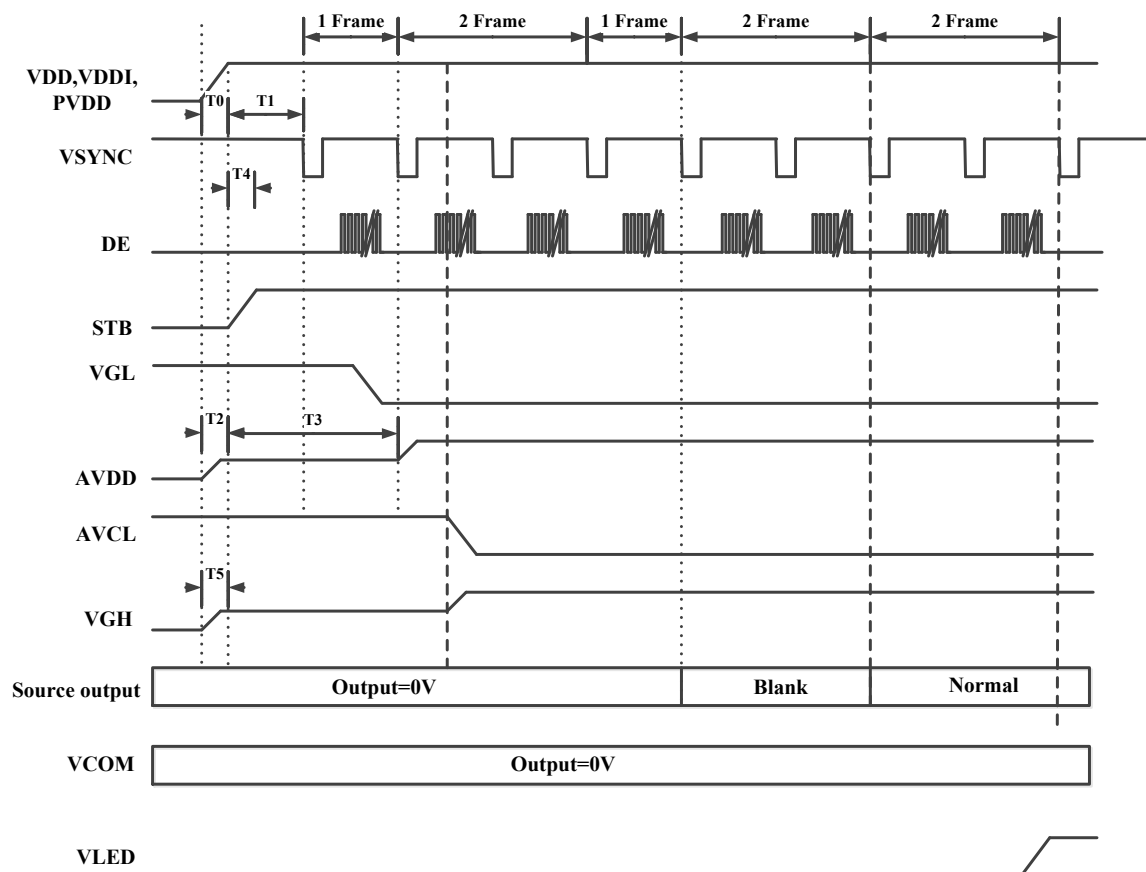


	Description	Min. Time
T0	Determined by the external power	
T1	Time from stable VDD, VDDI, PVDD set-up to the first VSYNC	T1=0
T2	Time from AVDD=0V to AVDD=3.3V	T2=T0
T3	Time from AVDD=3.3V to AVDD=6.0V	T3=T1+ (1*Frame)
T4	Time from stable VDD, VDDI, PVDD set-up to DISP asserted	T4=0
T5	Time from VGH=0V to VGH=3.3V	T5=T0

12.2. Power Off Sequence

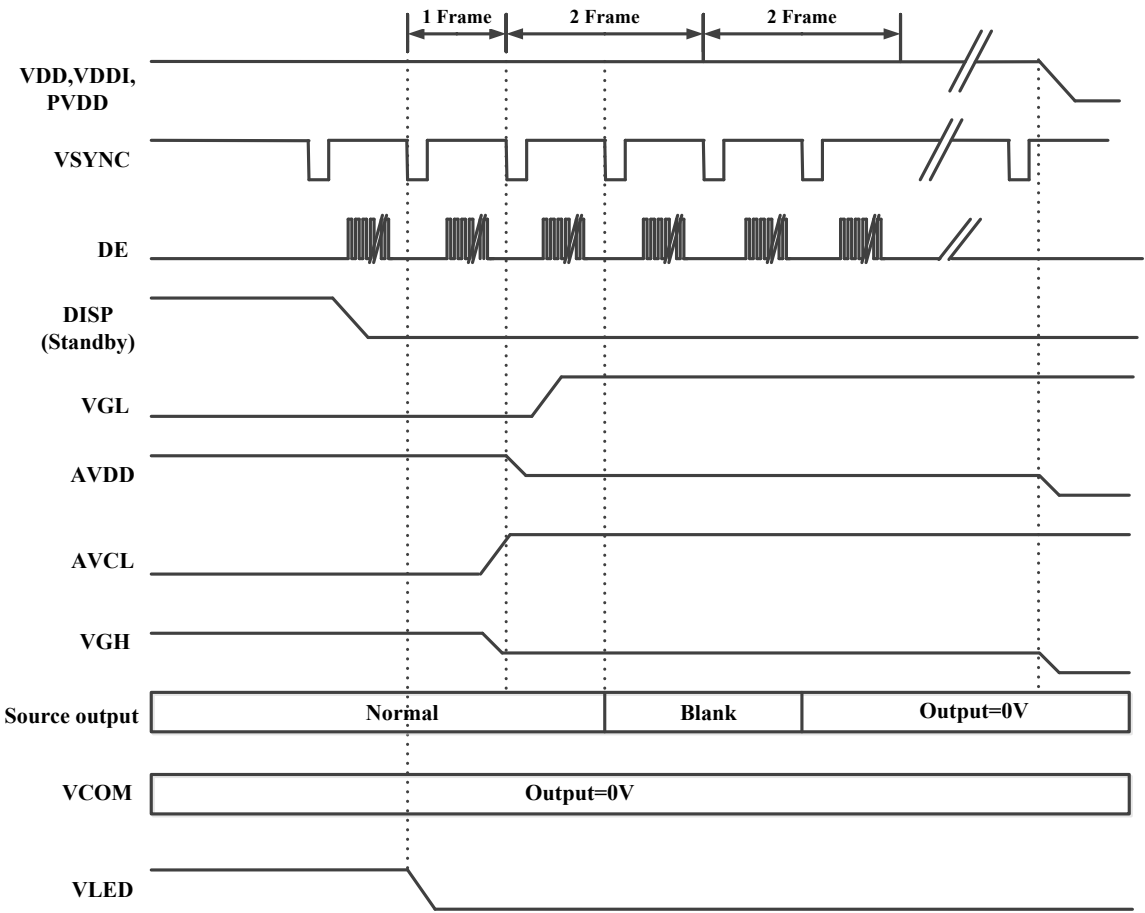

13. OTP Flow

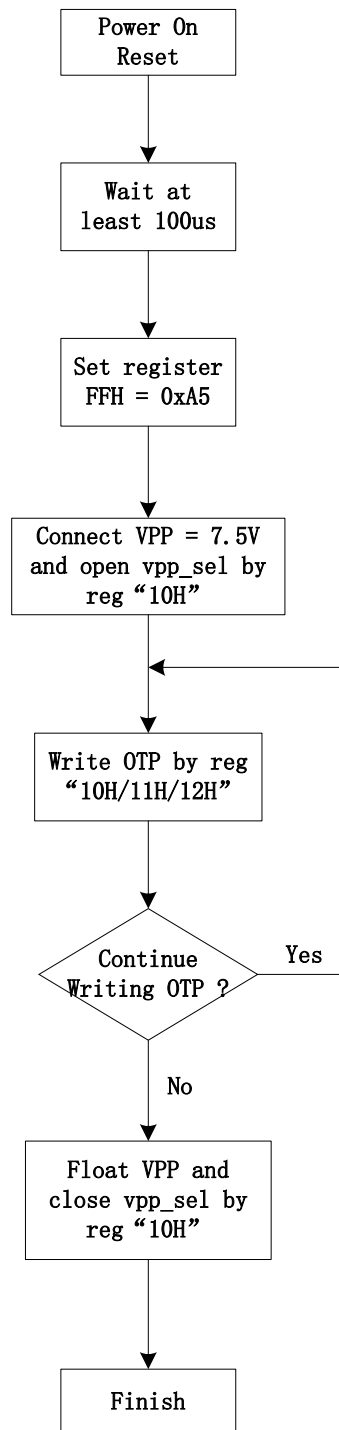

Step 1: Attach LCD module on OTP programming machine.

LCD module condition	
VDD(V)	3.3

Step 2: Initialize the non-programmed module by software.

Function	W/R	CMD	Par	Note
Power on reset				
Waiting 100ms				

Step 3: Hardware setting

Action	Note
External Power 7.5V to VPP Pin	

Step 4: Enable OTP programming Mode and parameter setup

Function	W/R	CMD	Par	Note
Enable Command	W	FF	A5	
Enable OTP	W	10	04	
Enable VPP Sel	W	10	0C	
OTP parameter setup	W	11	ADDR	
OTP parameter setup	W	12	DATA	
Enable Write OTP	W	10	0E	
Waiting 30us				
Disable Write OTP	W	10	0c	

Step 5: Continue Write OTP.

Function	W/R	CMD	Par	Note
OTP Write Command	W			Program OTP, Repeat Step 4

Step 6: Hardware setting

Function	W/R	CMD	Par	Note
Disable VPP Sel	W	10	04	
Disable OTP Programl	W	10	00	
Remove 7.5V form VPP Pin				

Step 7: Turn off VDD and VDDI, waiting for 200ms then and turn on again.

Step 8: Execute normal display on sequence.

Function	W/R	CMD	Par	Note
HW reset				HW reset sequence
Waiting 100ms				
Display On LCD Module				Refer Power On Sequence

Step 9: Check the image quality.

14. Recommended panel routing resistance

The recommended wiring resistance values are given below. The wiring resistance values affect the current capability of the power supply blocks and thus must be designed within the given range.

	Pin Name	Unit: ohm
1	VPP	<3
2	GVDD	<50
3	GVCL	<50
4	VCOM	<3
5	DGND	<3
6	VCC	<50
7	VDDI	<3
8	VDD	<3
9	VSYNC	<50
10	HSYNC	<50
11	DCLK	<50
12	VDPOL	<50
13	HDPOL	<50
14	DCLKPOL	<50
15	SBGR	<50
16	DE	<50
17	PARA_SERI	<50
18	EXTC	<50
19	HDIR	<50
20	VDIR	<50

	Pin Name	Unit: ohm
21	CS	<50
22	SDA	<50
23	SCL	<50
24	DISP	<50
25	GRB	<50
26	SYNC	<50
27	DR7-DR0	<50
28	DG7-DG0	<50
29	DB7-DB0	<50
30	AGND	<3
31	AVCL	<50
32	AVCL1	<50
33	AVDD	<50
34	AVDD1	<50
35	PGND	<3
36	PVDD	<3
37	VGH	<50
38	VGL	<50

15. Revision history

Revision	Description	Date
1.0	Frist Release	2021/03
1.1	Update OTP flow	2021/12/9