


E18RG42432LBAM300-R 4SPI+16BIT RGB



NOTE:

1. Interface: 4SPI+16BIT RGB
2. SDO PIN if not used place OPEN
3. VCC=3.3V, LEDA=3.2V, I=80mA

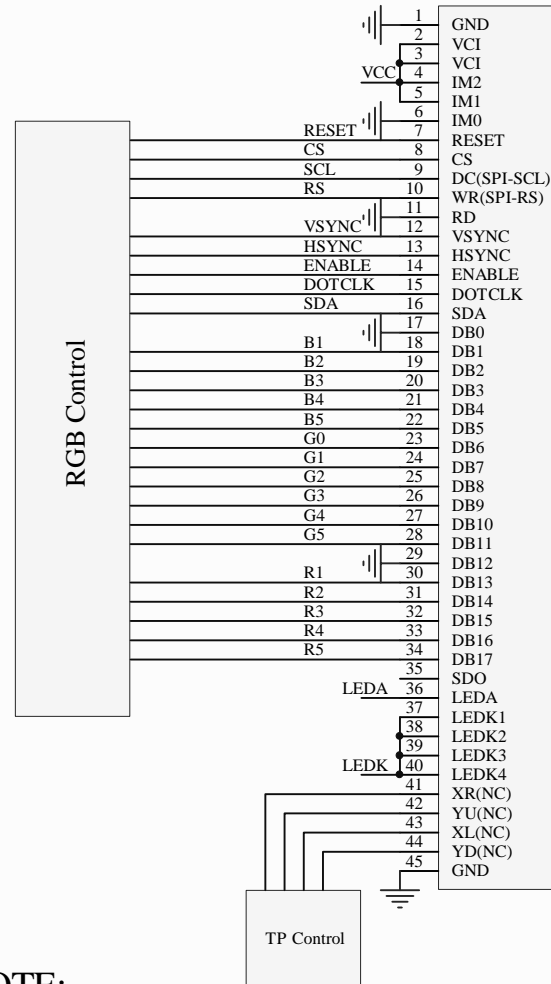