


E22RA-FW280-N 3SPI+18BIT RGB

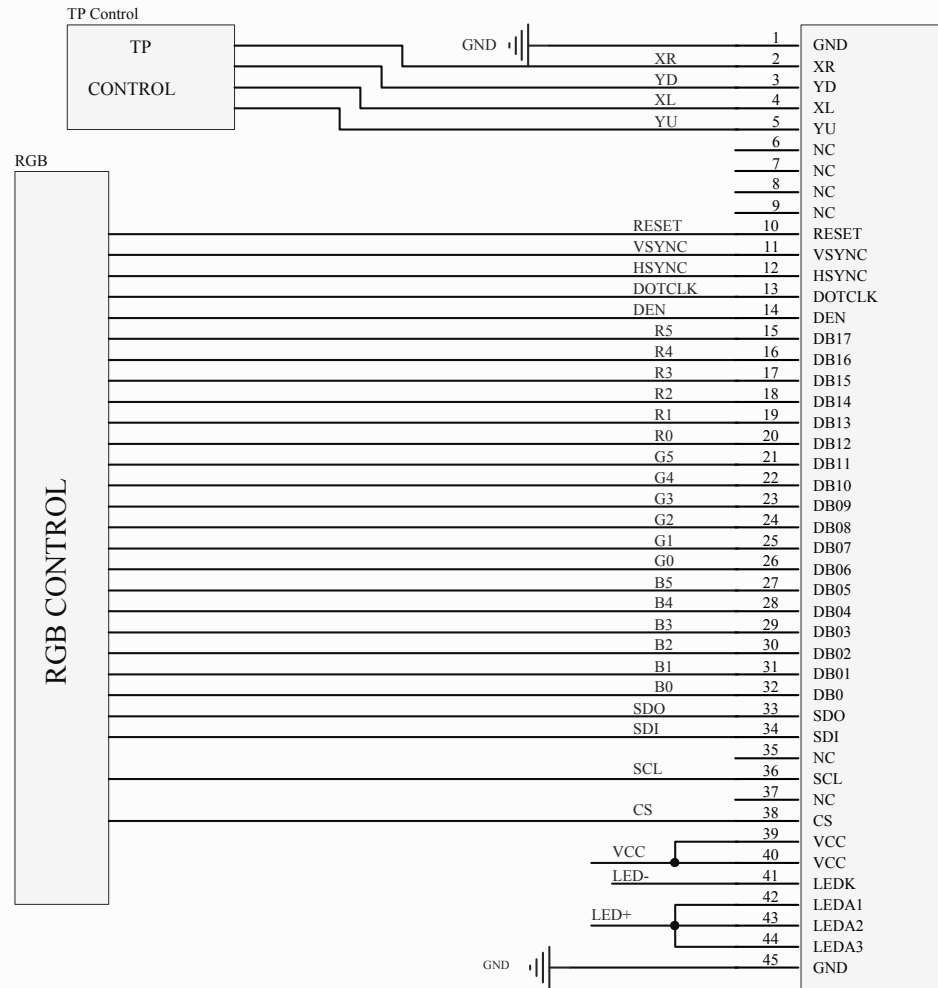

NOTE:

1. Interface: 3SPI+18BIT RGB.
2. SDO PIN if not used please OPEN.
3. VCC=3.3V.
4. Vled=3.2V±0.3V Iled=45~60mA.