


3SPI+16BIT RGB

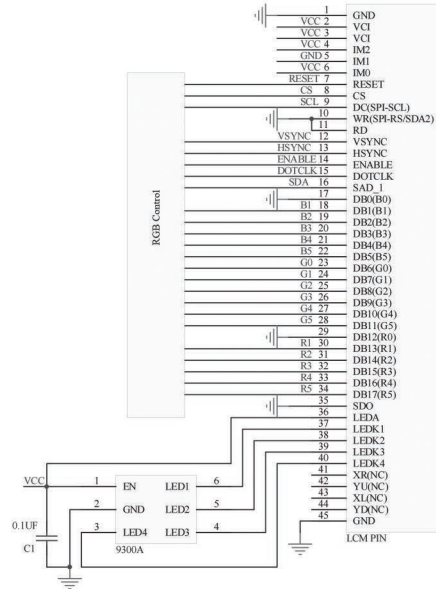

NOTE:

- 1.Interface:3SPI+16BIT RGB
- 2.SDO PIN if not used place OPEN
- 3.VCC=3.3V