


E24RG68060LWAM450-R 4SPI+18BIT RGB

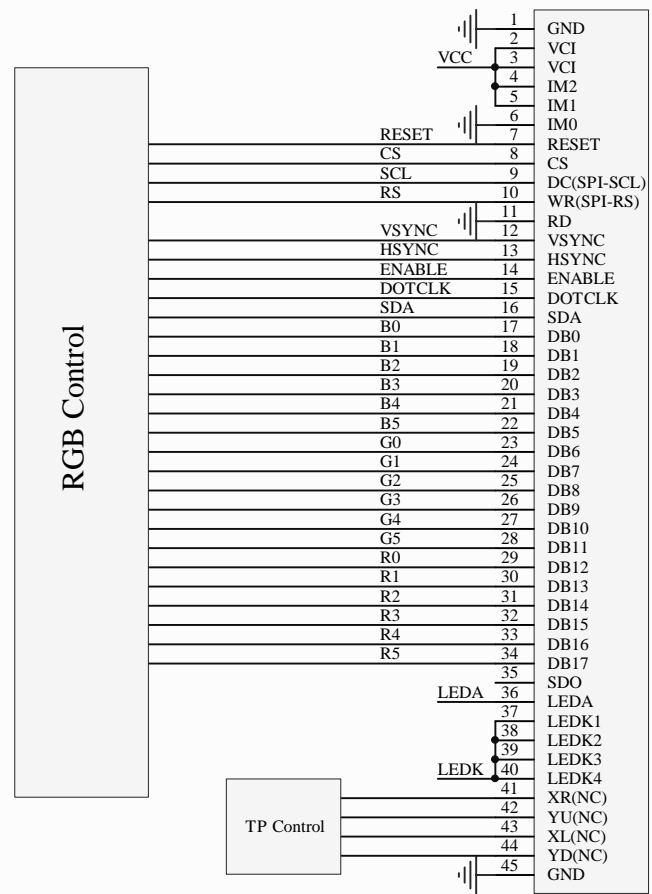

NOTE:

- 1.Interface: 4SPI+18BIT RGB
- 2.SDO PIN if not used place OPEN
- 3.VCC=3.3V, LEDA=3.2V, I=80mA