


E26RB-FS500-N 4SPI+24BIT RGB Interface



NOTE:

1. VCI=3.3V, IOVCC=1.8-3.3V, LEDA=19.2V, I=20mA

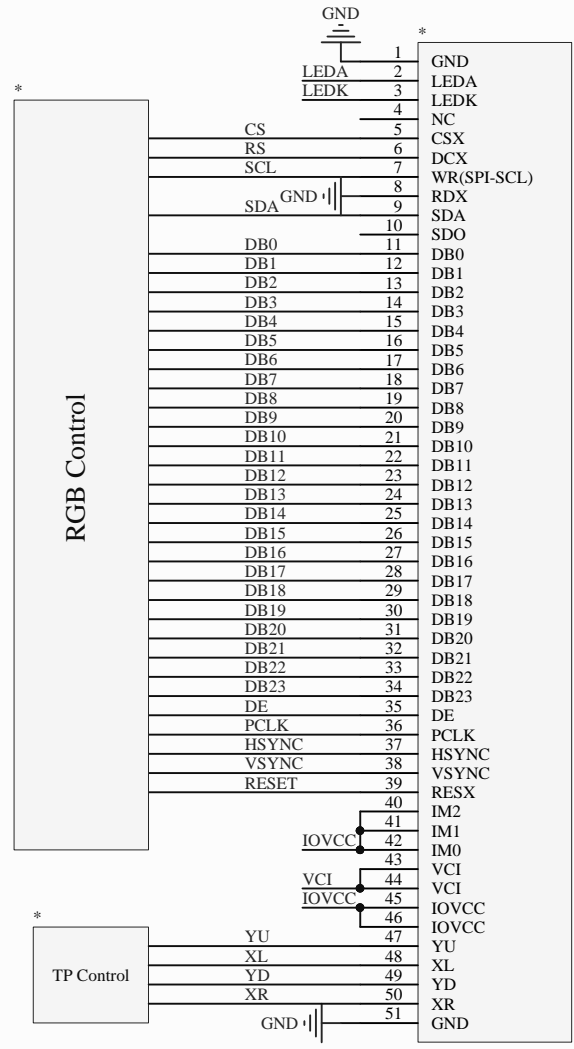