


3SPI+RGB16BIT

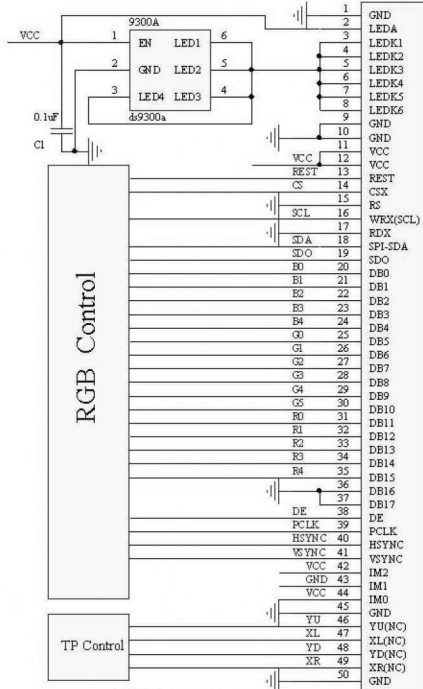

NOTE: 1:Interface: 3SPI+RGB16BIT
 2:SDO PIN if not used place OPEN
 3: VCC=3.3V