


E17RG11216LW6M300-N 4SPI+16BIT RGB

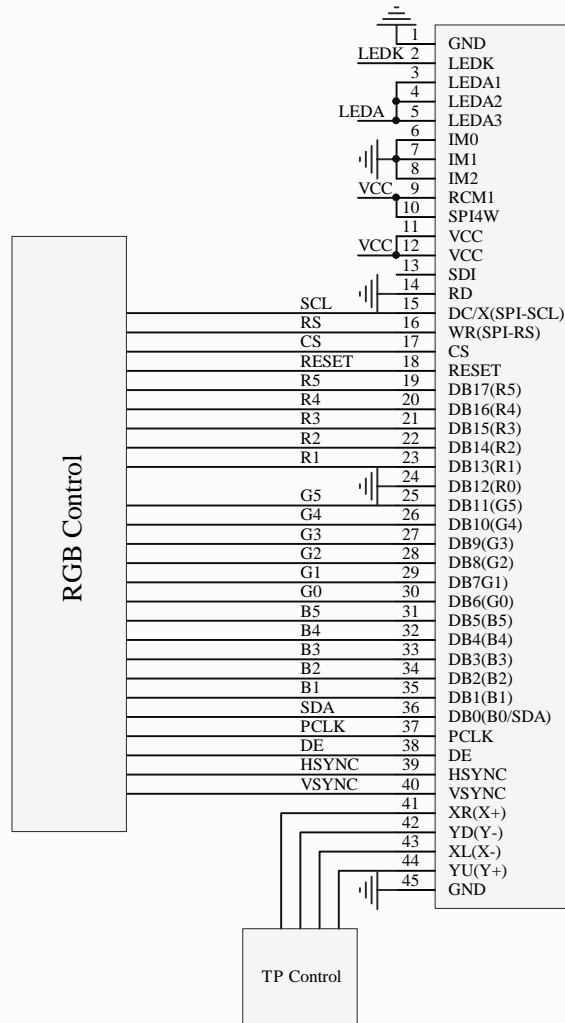

NOTE:

1. Interface: 4SPI+16BIT RGB
2. SDI PIN if not used place OPEN
3. VCC=3.3V, LEDA=3.2V, I=60mA