


E24RG12432LW6M250-R 4SPI+16BIT RGB

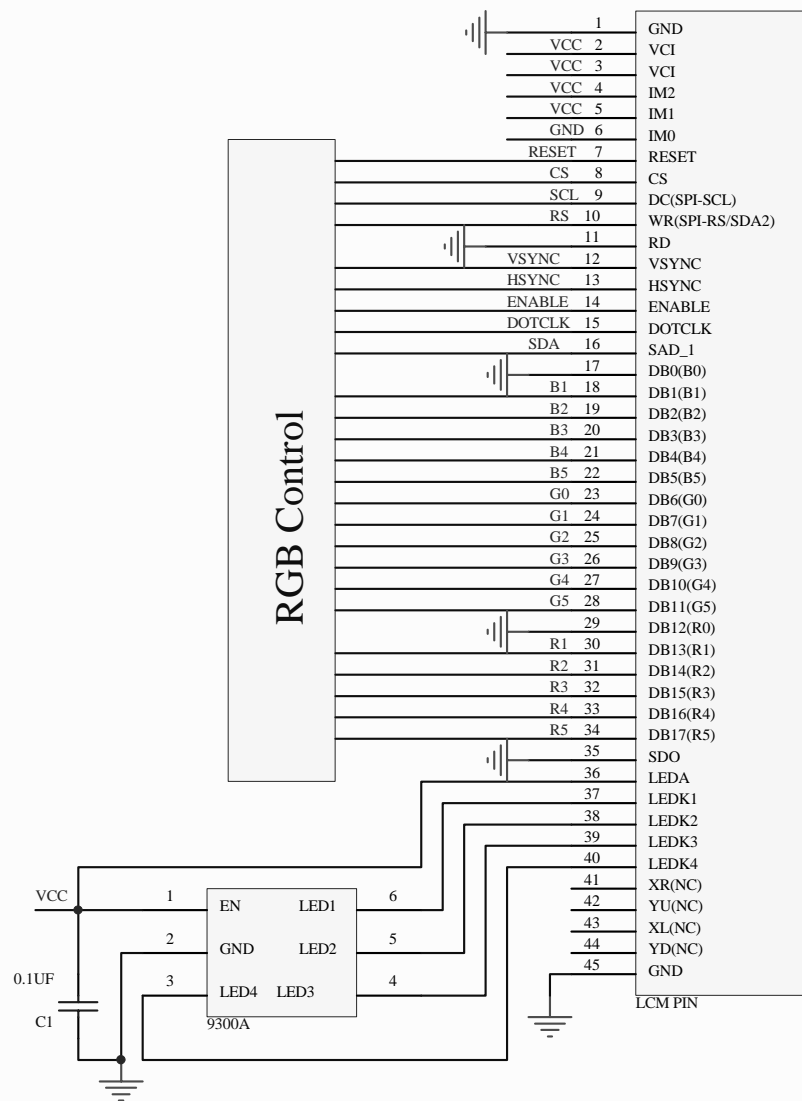

NOTE:
 1.Interface:4SPI+16BIT RGB
 2.SDO PIN if not used place OPEN
 3.VCC=3.3V