


E28RG12432LW2M450-R  
4SPI+16 BIT RGB

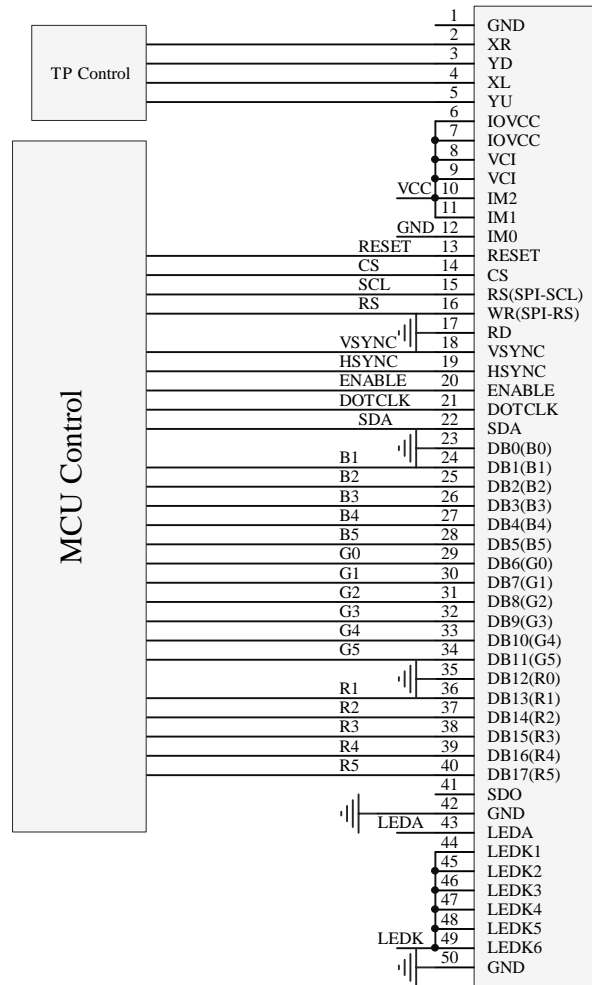

**NOTE:**

- 1.Interface: 4SPI+16BIT RGB
- 2.SDO PIN if not used place OPEN
- 3.VCC=3.3V, LEDA=3.2V, I=120mA

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FOCUS DISPLAY SOLUTIONS, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSIONS OF FOCUS DISPLAY SOLUTIONS, INC. IS PROHIBITED

Model Name: E28RG12432LW2M450-R	
General Tol:	± 0.2
Approvals	Date
DWN:	
CHK:	
APP:	



Drawing No.:	Scale:
Size:	Unit: mm
	Page: 1/1