


4SPI+RGB18BIT

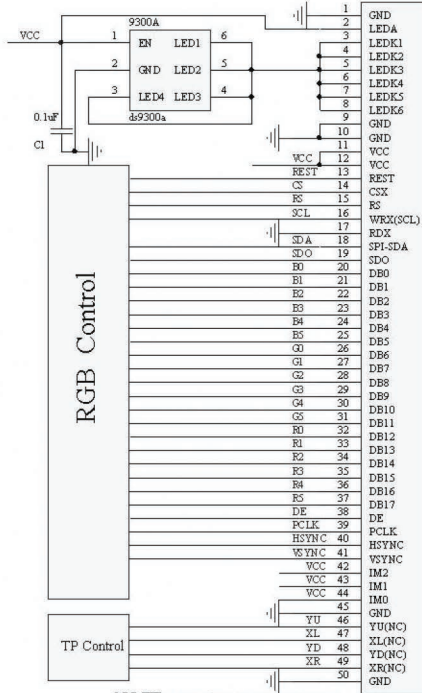

NOTE: 1:Interface 4SPI+RGB18BIT
 2:SDO PIN if not used place OPEN
 3: VCC=3.3V