


E50RA-FW500-C 3SPI+18BIT RGB



NOTE:
 1. nterface:3SPI+18BIT RGB.
 2.SDO PIN if not used place OPEN
 3.VCC=3.3V.
 4.VLED=19.2V,ILED=40mA

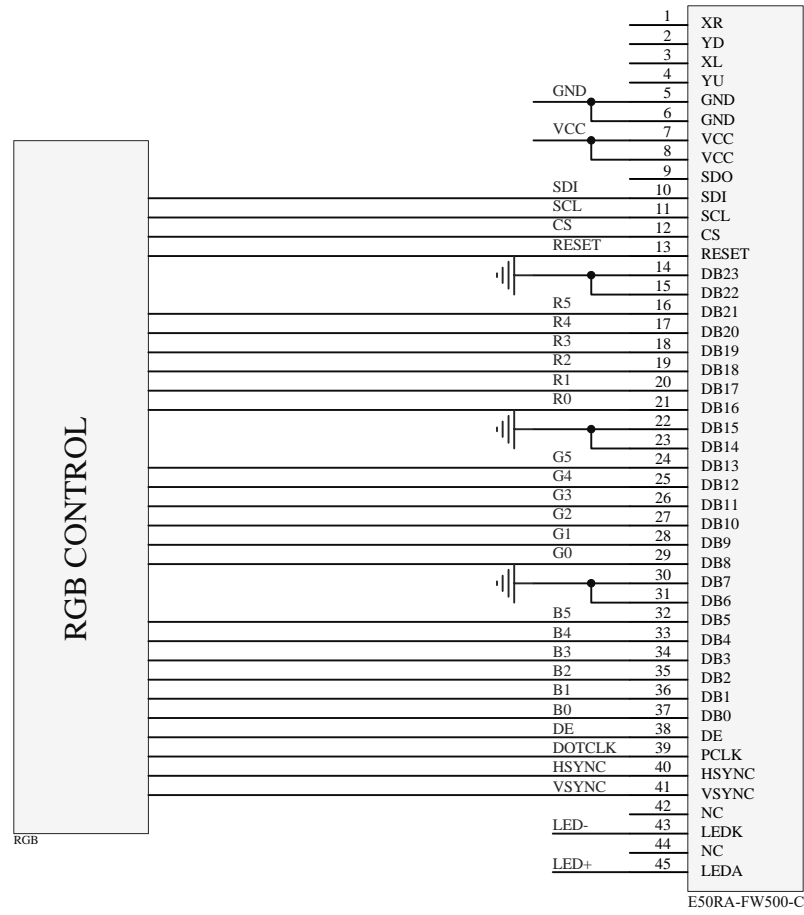