


E50RG14885LBAM500-C 3SPI+24BIT RGB



NOTE:
 1.Interface:3SPI+24BIT RGB.
 2.SDO PIN if not used place OPEN
 3.VCC=3.3V.
 4.VLED=19.2V,ILED=20mA

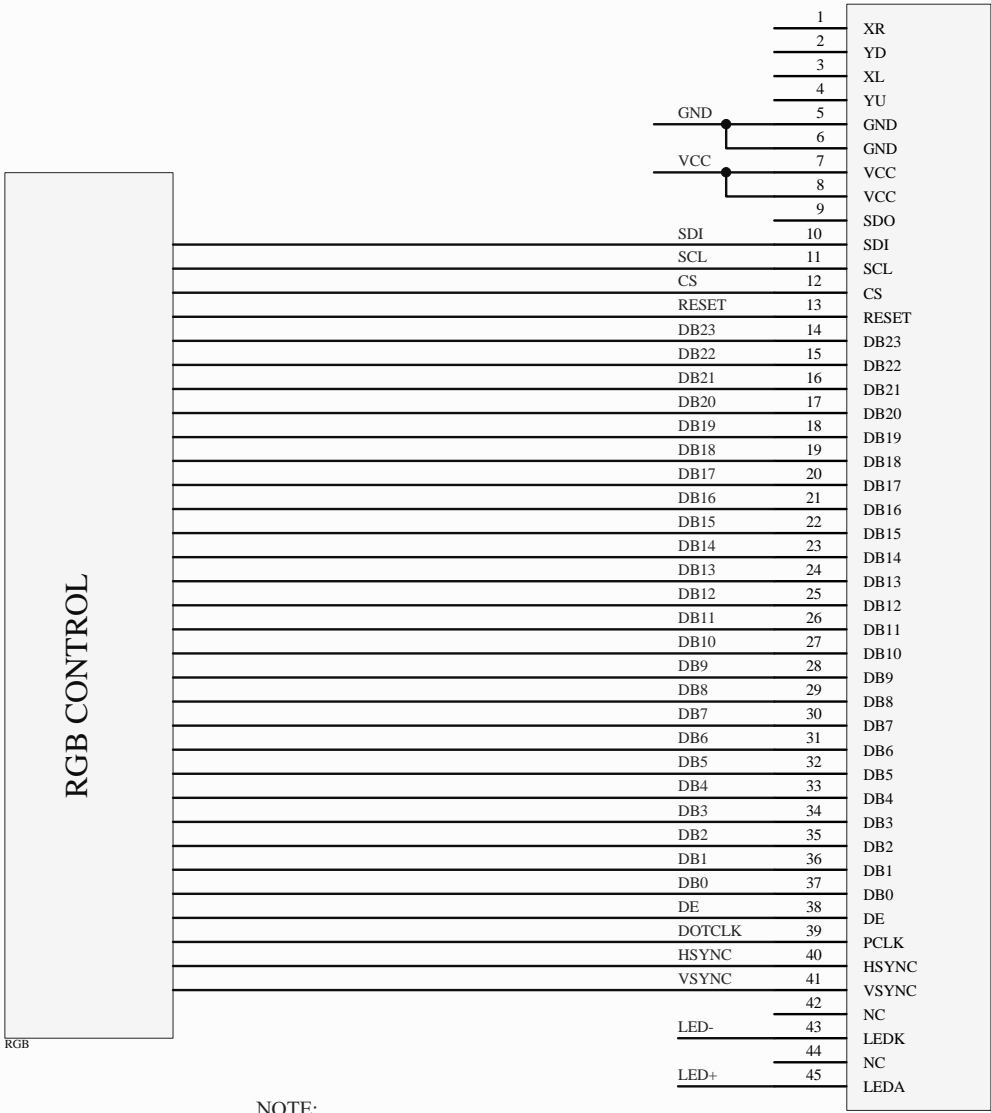