


# E50RG84885LWAM520-CA 3SPI+16BIT RGB



NOTE:  
 1. nterface:3SPI+16BIT RGB.  
 2.SDO PIN if not used place OPEN  
 3.VCC=3.3V.  
 4.VLED=19.2V,ILED=40mA

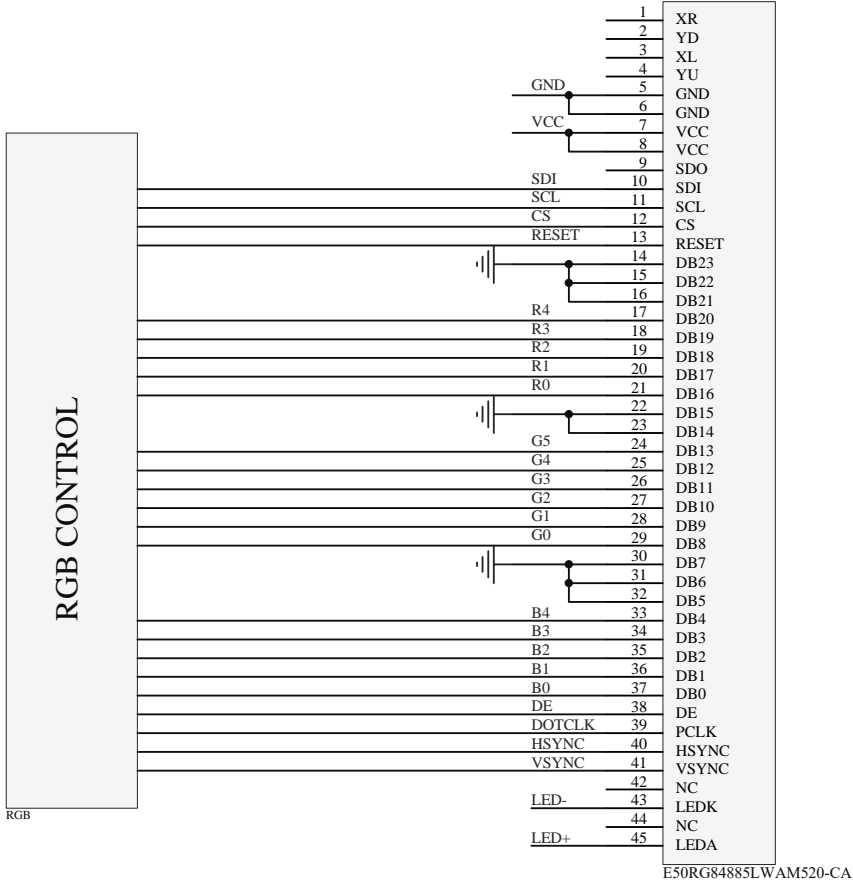