



# FOCUS LCDs

LCDs MADE SIMPLE®

Ph. 480-503-4295 | [NOPP@FocusLCDs.com](mailto:NOPP@FocusLCDs.com)

TFT | OLED | CHARACTER | GRAPHIC | UWVD | SEGMENT | CUSTOM

## TFT Display Module

Part Number  
E101RA1-I-MS300-C1

### Overview:

- 10.1-inch TFT (135.36x216.58mm)
- 1200x1920 Pixels
- 4-Lane MIPI Interface
- Special Temperature Range
- All View
- Transmissive, Normally Black IPS
- Capacitive Touch Panel
- 300 NITS
- TFT IC: HX8279D
- RoHS Compliant

## Description

This is a color active matrix TFT (Thin Film Transistor) LCD (Liquid Crystal Display) that uses amorphous silicon TFT as a switching device. This model is composed of a transmissive type TFT-LCD Panel, driver circuit, capacitive touch panel and backlight unit. The resolution of the 10.1" TFT-LCD contains 1200x1920 pixels and can display up to 16M colors.

## Features

Input Voltage: 3.3V

TFT Interface: 4-Lane MIPI


CTP Interface: I2C or USB

General Information	Specification	Unit	Note
	Main Panel		
TFT Display Area (AA)	135.36(H) x 216.58(V) (10.1 inch)	mm	--
CTP View Area	135.96(H) x 217.18(V)	mm	--
Driver Element	TFT Active Matrix	--	--
Display Colors	16M	colors	--
Number of Pixels	1200(RGB)x1920	dots	--
TFT Pixel Arrangement	RGB vertical stripe	--	--
Pixel Pitch	0.1128 (H) x 0.1128 (V)	mm	--
Viewing Angle	ALL	o'clock	--
TFT Controller IC	HX8279D	--	--
CTP Driver IC	ILI2511	--	--
Display Mode	Transmissive/Normally Black	--	--
Touch Mode	True Multi-Touch	--	--
CTP Bonding	Optical Bonding	--	--
Operating Temperature	-10 to +50	°C	--
Storage Temperature	-20 to +60	°C	--

## Mechanical Information

Item		Min.	Typ.	Max.	Unit	Note
Module Size	Height (H)	--	174.37	--	mm	--
	Vertical (V)	--	255.12	--	mm	--
	Depth (D)	--	4.80	--	mm	--
Weight		--	tbd	--	g	--

# 1. Outline Dimensions

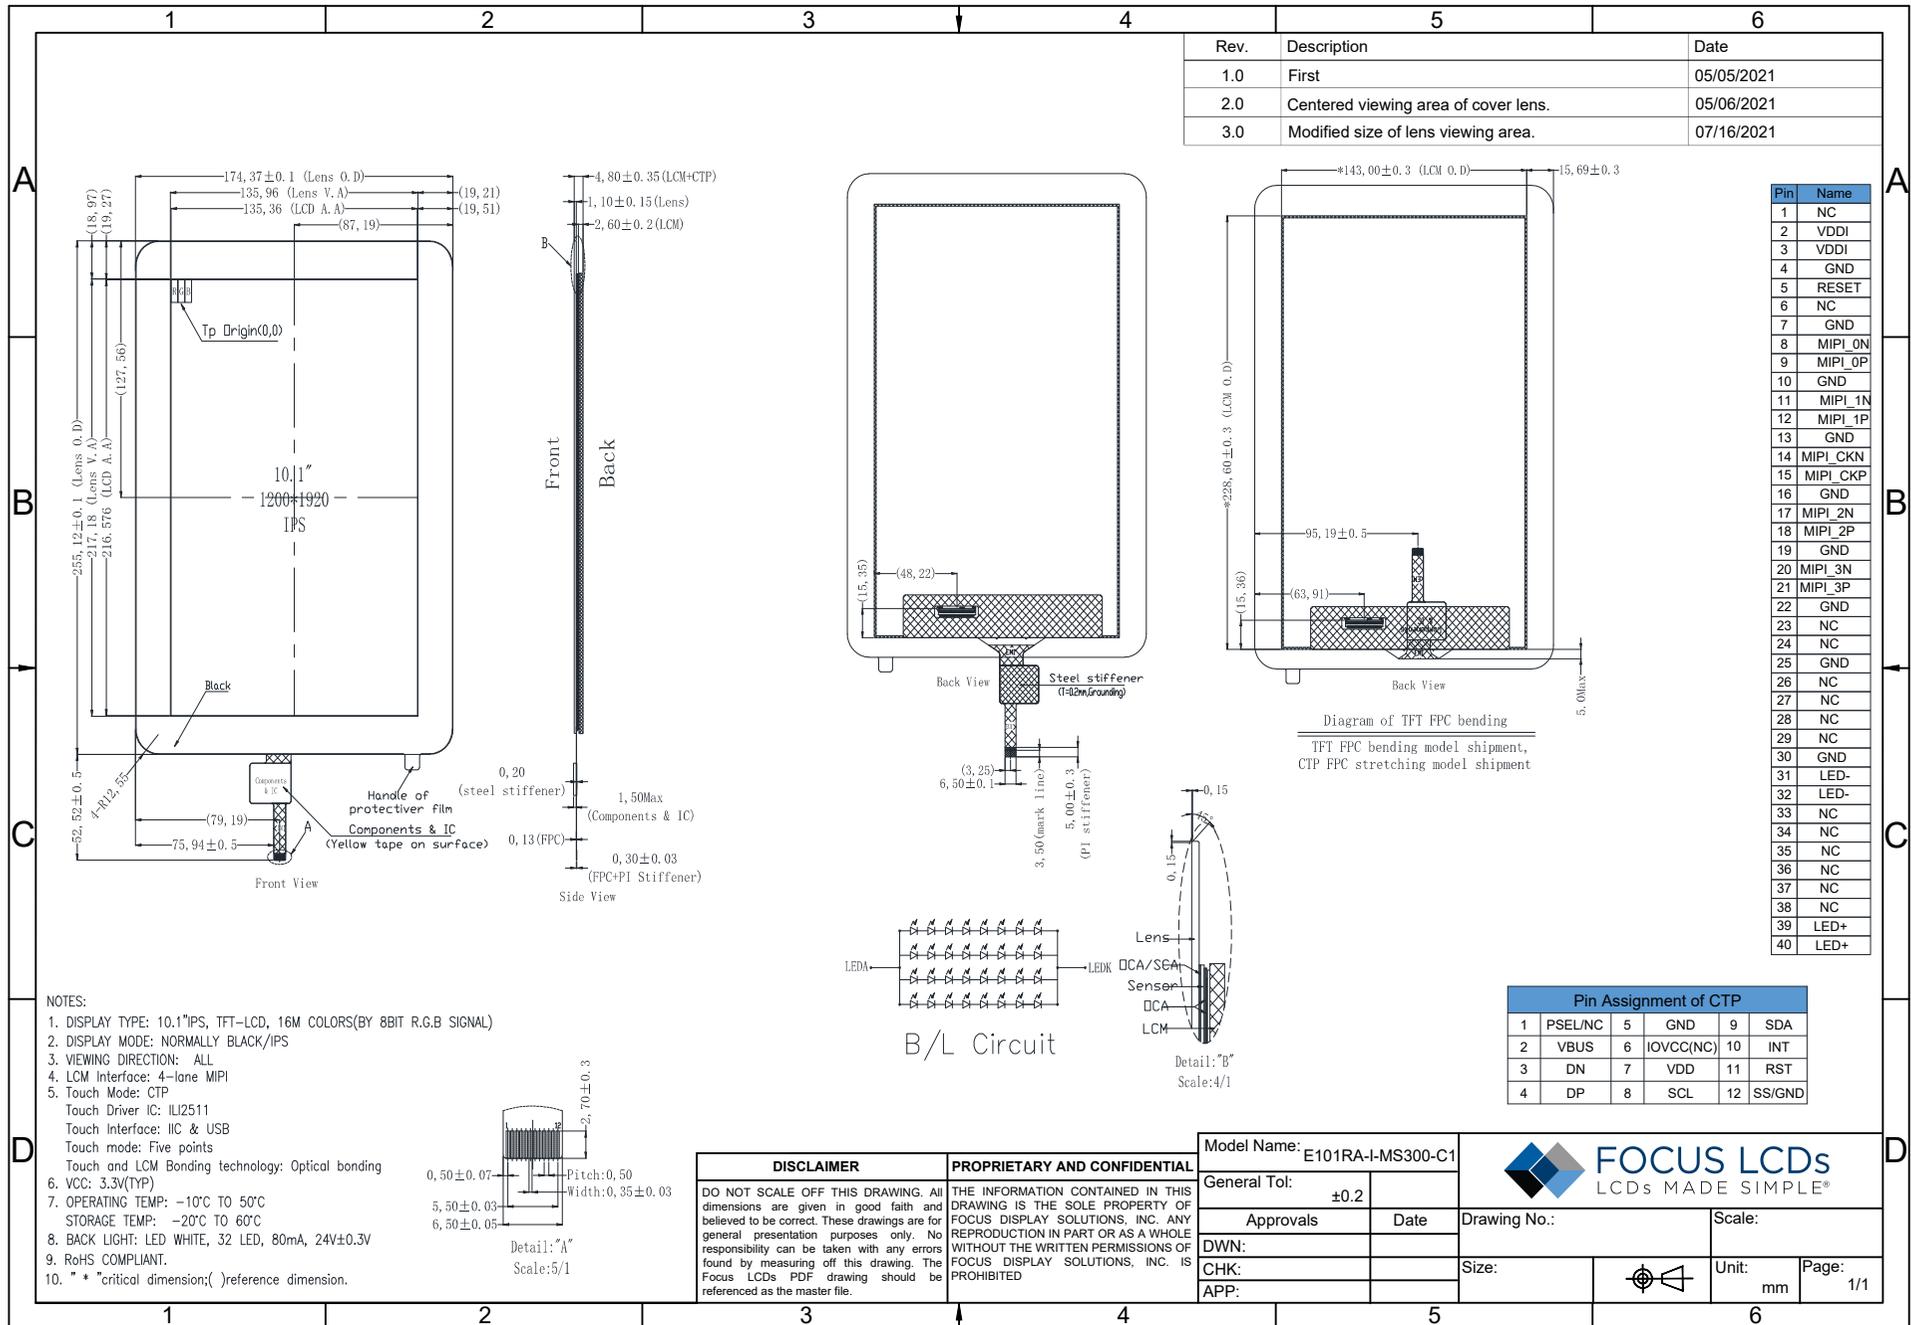

## 2. Input Terminal Pin Assignment

### 2.1 TFT Pin Assignment

NO.	SYMBOL	DISCRIPTION	I/O
1	NC	--	--
2	VDDIN	Power supply 3.3V	P
3	VDDIN		
4	GND	Ground	P
5	RESET	Global reset signal	I
6	NC	--	--
7	GND	Ground	P
8	MIPI_ON	MIPI data input.	I
9	MIPI_OP		
10	GND	Ground	P
11	MIPI_1N	MIPI data input.	I
12	MIPI_1P		
13	GND	Ground	P
14	MIPI_CKN	MIPI clock input.	I
15	MIPI_CKP		
16	GND	Ground	P
17	MIPI_2N	MIPI data input.	I
18	MIPI_2P		
19	GND	Ground	P
20	MIPI_3N	MIPI data input.	I
21	MIPI_3P		
22	GND	Ground	P
23	NC	--	--
24	NC	--	--
25	GND	Ground	P
26	NC	--	--
27	NC	--	--
28	NC	--	--
29	NC	--	--
30	GND	Ground	P
31	LED-	LED Cathode	P
32	LED-	LED Cathode	P
33	NC	--	--
34	NC	--	--
35	NC	--	--
36	NC	--	--
37	NC	--	--
38	NC	--	--
39	LED+	LED Anode	P
40	LED+	LED Anode	P

## 2.2 CTP Pin Assignment

NO.	Symbol	Description	I/O
1	PSEL/NC	OPEN	--
2	VBUS	USB 5V Input Power Supply Voltage	P
3	DN	USB D-	I/O
4	DP	USB D+	I/O
5	GND	Ground	P
6	IOVCC/NC	OPEN	--
7	VDD	Supply Voltage	P
8	SCL	I2C Clock Input	I
9	SDA	I2C Data Input and Output	I
10	INT	External Interrupt to the Host	I
11	RST	External Reset, Low is Active	I
12	SS/GND	Ground	P

### 3. LCD Optical Characteristics

#### 3.1 Optical Specifications

Item	Symbol	Condition	Min	Typ.	Max	Unit	Note
Contrast Ratio	CR	$\theta=0$	600	800	--	%	(2)
Response Time	Rising	$T_R+T_F$	Normal Viewing Angle	--	25	50	ms
	Falling						
Color Filter Chromaticity	White	$W_X$	-0.04	0.286	+0.04		(5)(6)
		$W_Y$		0.321			
	Red	$R_X$		0.619			
		$R_Y$		0.329			
	Green	$G_X$		0.301			
		$G_Y$		0.600			
	Blue	$B_X$		0.150			
		$B_Y$		0.059			
Viewing Angle	Hor.	$\Theta_L$	--	85	--	degree	(1)(6)
		$\Theta_R$	--	85	--		
	Ver.	$\Theta_T$	--	85	--		
		$\Theta_B$	--	85	--		
Option View Direction	ALL						(1)

#### Measuring Conditions


1. Dark Room
2. Ambient Temperature of  $25\pm 2^\circ\text{C}$
3. 15 Minute Warm Up

#### Measuring Equipment

FPM520 of Westar Display Technologies, INC., which utilized SR-3 for Chromaticity and BM-5A for other optical characteristics.

### Optical Specification Reference Notes

(1) Definition of Viewing Angle: The viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3,9 o'clock direction and the vertical or 6,12 o'clock direction with respect to the optical axis which is normal to the LCD surface.

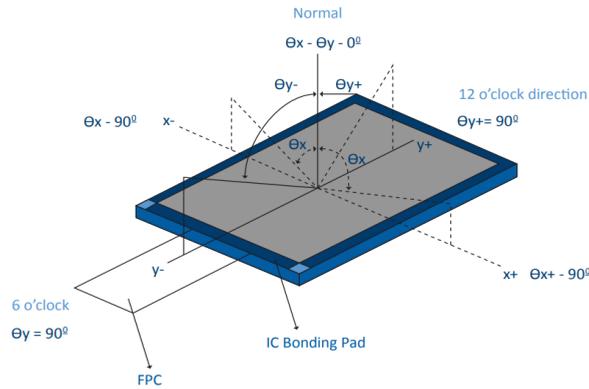


(2) Definition of Contrast Ratio (Cr): measured at the center point of panel. The contrast ratio (Cr) measured on a module, is the ratio between the luminance (Lw) in a full white area (R=G=B=1) and the luminance (Ld) in a dark area (R=G=B=0).

$$Cr = \frac{Lw}{Ld}$$


(3) Definition of transmittance (T%): The transmittance of the panel including the polarizers is measured with electrical driving. The equation for transmittance Tr is:

$$Tr = \frac{I_t}{I_o} \times 100\%$$

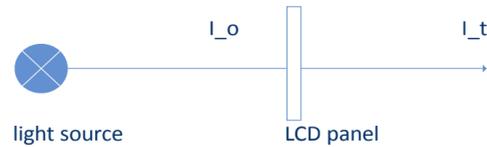

I<sub>o</sub> = the brightness of the light source.  
 I<sub>t</sub> = the brightness after panel transmission

(4) Definition of Response Time (Tr, Tf): The rise time 'Tr' is defined as the time for luminance to change from 90% to 10% as a result of a change of the electrical condition. The fall time 'Tf' is defined as the time for luminance to change from 10% to 90% as a result of a change of the electrical condition.

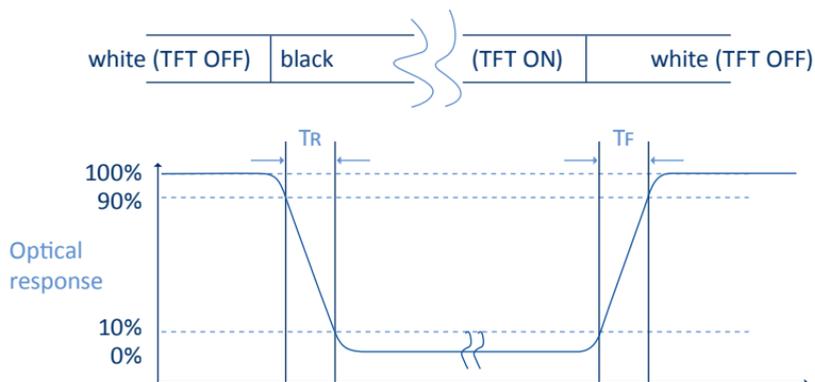

(5) Definition of Color Gamut:

Measuring machine CFT-01. NTSC's Primaries:  $R(x,y,Y), G(x,y,Y), B(x,y,Y)$ . FPM520 of Westar Display Technologies, INC., which utilized SR-3 for Chromaticity and BM-5A for other optical characteristics. The color chromaticity shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.



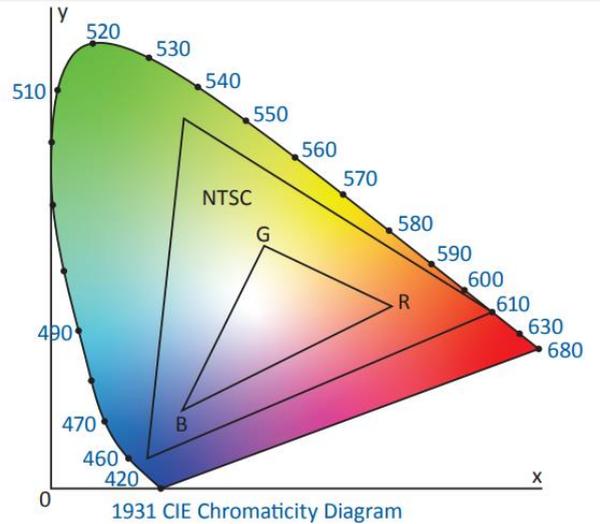


Fig. 1931 CIE chromacity diagram

$$\text{Color gamut: } S = \frac{\text{Area of RGB triangle}}{\text{Area of NTSC triangle}} \times 100\%$$

(6) Definition of Optical Measurement Setup:

The LCD module should be stabilized at a given temperature for 20 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting backlight for 20 minutes.

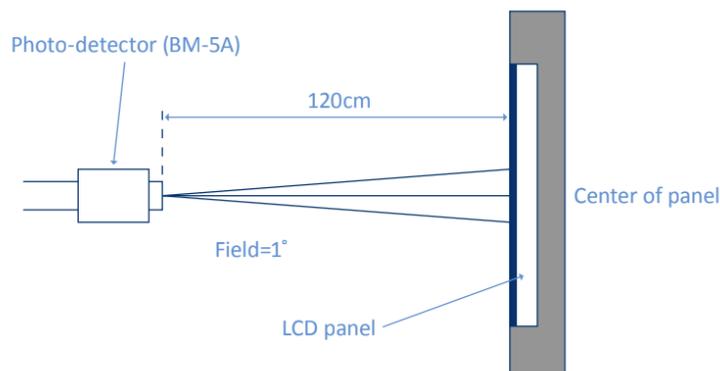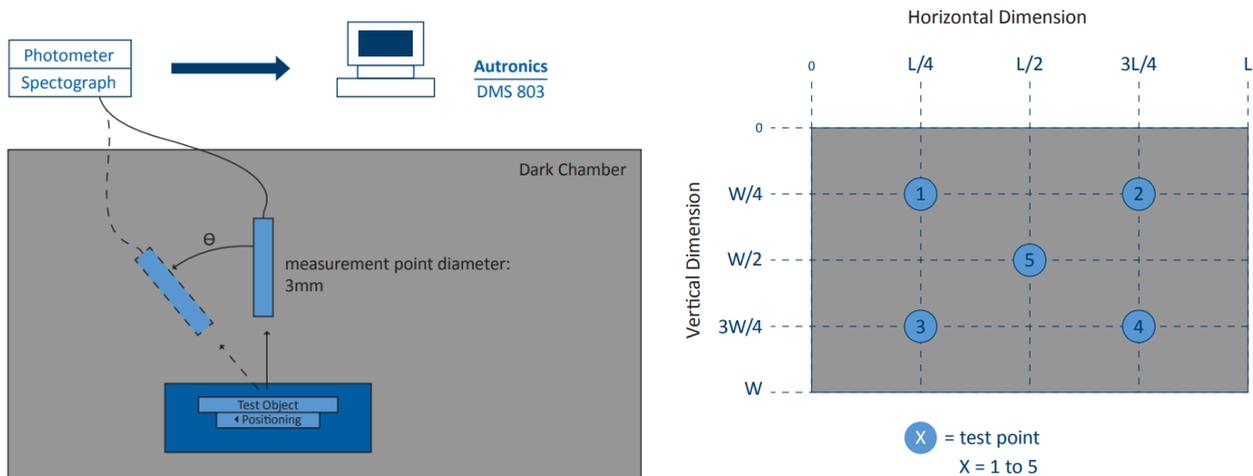

## 4. TFT Electrical Characteristics

### 4.1 Absolute Maximum Rating (Ta=25°C,,VSS=0V)

Characteristics	Symbol	Min	Max	Unit
Digital Supply Voltage	VDD	-0.3	5.5	V
Operating Temperature	TOP	-10	+50	°C
Storage Temperature	TST	-20	+60	°C

*NOTE: If the absolute maximum rating of the above parameters is exceeded, even momentarily, the quality of the product may be degraded. Absolute maximum ratings specify the values which the product may be physically damaged if exceeded. Be sure to use the product within the range of the absolute maximum ratings.*

### 4.2 DC Electrical Characteristics


Characteristics	Symbol	Min	Typ.	Max	Unit	Note
Digital Supply Voltage	VDD	3.0	3.3	3.6	V	
Normal Mode Current Consumption	IDD	--	110	220	mA	
Level Input Voltage	V <sub>IH</sub>	0.7*VDD	--	VDD	V	
	V <sub>IL</sub>	GND	--	0.3*VDD	V	



## 550 Signal Timing Specifications

### 55.1 MIPI Timing

Item		Symbol	Min	Typ.	Max	Unit	
LCD	Frame Rate	--	--	60	--	Hz	
	Pixel Rate	--	156.8	156.8	159.9	MHz	
Timing	MIPI CLK	Frequency	fCLK	490	490	498	MHz
		Period	Tclk	2.01	2.04	2.04	ns
	Horizontal	Horizontal Total Time	tHP	1343	1343	1366	tCLK
		Horizontal Active Time	tHadr	1200			tCLK
		Horizontal Pulse Width	tHsync	1	1	1	tCLK
		Horizontal Back Porch	tHBP	32	32	32	tCLK
		Horizontal Front Porch	tHFP	110	110	133	tCLK
		Vertical	Vertical Total Time	tvp	1946	1946	1951
	Vertical Active Time		tVadr	1920			tH
	Vertical Pulse Width		tVsync	1	1	1	tH
	Vertical Back Porch		tVBP	14	14	14	tH
	Vertical Front Porch		tVFP	11	11	16	tH
	Bit Rate		TX SPD	980	980	995	Mbps
Lane			--	4	--	Lane	

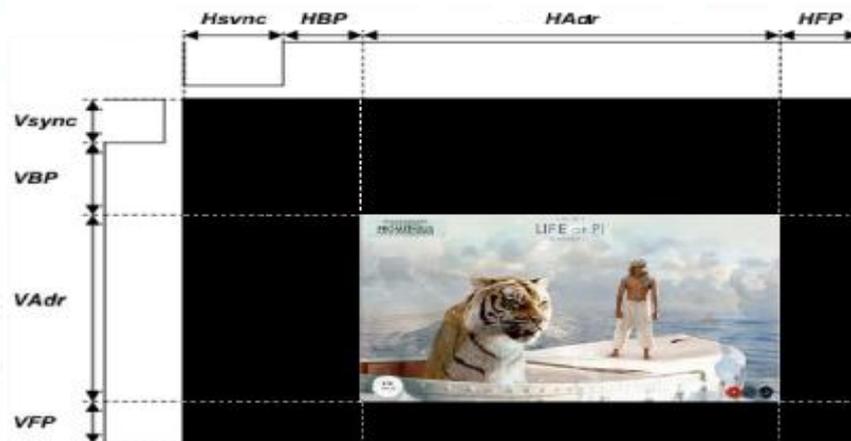


## 5.2 Power On Timing Sequence

Lane Pair	MCU (Master) Display Module (Slave)
Clock Lane	Unidirectional Lane: <ul style="list-style-type: none"> <li>• Clock Only</li> <li>• Escape Mode (ULPS Only)</li> </ul>
Data Lane 0	Bi-Directional Lane <ul style="list-style-type: none"> <li>• Forward High-Speed</li> <li>• Bi-Directional Escape Mode</li> <li>• Bi-Directional LPDT</li> </ul>
Data Lane 1 Data Lane 2 Data Lane 3	Unidirectional Lane <ul style="list-style-type: none"> <li>• Forward High-Speed</li> </ul>

## 5.3 Power on Timing Sequence

VDD = 3.3 V

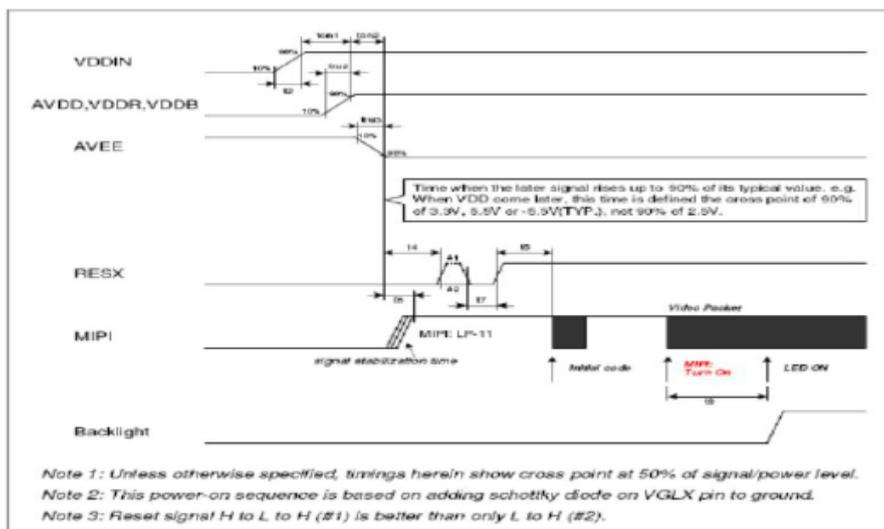

Symbol	Value			Unit	Remark
	Min.	Typ.	Max.		
ton1		No limit		ms	
ton2		0(Note)		ms	
ton3		No limit	-	ms	
ton4		No limit	-	ms	
tD			150	µs	
tu1			150	µs	
tu2			150	µs	
tu3			150	µs	
tu4			150	µs	
tR	40	-	-	ms	
tF	120			ms	
t8	0			ms	
t7	10			µs	
t8	8			VS	Keep data more than 8 frames (VS)

## 6.0 CTP Electrical Characteristics

### 6.1 Absolute Maximum Rating

Characteristics	Symbol	Min.	Max.	Unit	Note
Digital Supply Voltage	VDD	-0.3	5.5	V	Note1
Operating temperature	T <sub>OP</sub>	-10	+50	°C	
Storage temperature	T <sub>ST</sub>	-20	+60	°C	

### 6.2 DC Electrical Characteristics

Characteristics	Symbol	Min.	Typ.	Max.	Unit	Note
Digital Supply Voltage	VDD	3.0	3.3	3.6	V	
Normal mode Current consumption	IDD	--	110	220	mA	
Level input voltage	V <sub>IH</sub>	0.7*VDD	--	VDD	V	
	V <sub>IL</sub>	GND	--	0.3*VDD	V	

### 6.3 I2C DC Characteristics

For I2C DC Characteristics, see table 5-4 on page 11 of the data sheet for controller IC ILI2511. The data sheet can be found here: <https://focuslcds.com/content/ILI2511.pdf>


### 6.4 USB DC Characteristics

For USB DC Characteristics, see table 5-5 on page 12 of the data sheet for controller IC ILI2511. The data sheet can be found here: <https://focuslcds.com/content/ILI2511.pdf>

### 6.5 I2C AC Characteristics


For I2C AC Characteristics, see diagram in section 5.4 and table 5-7 on page 13 of the data sheet for controller IC ILI2511. The data sheet can be found here: <https://focuslcds.com/content/ILI2511.pdf>

## 6.6 Power-On Sequence

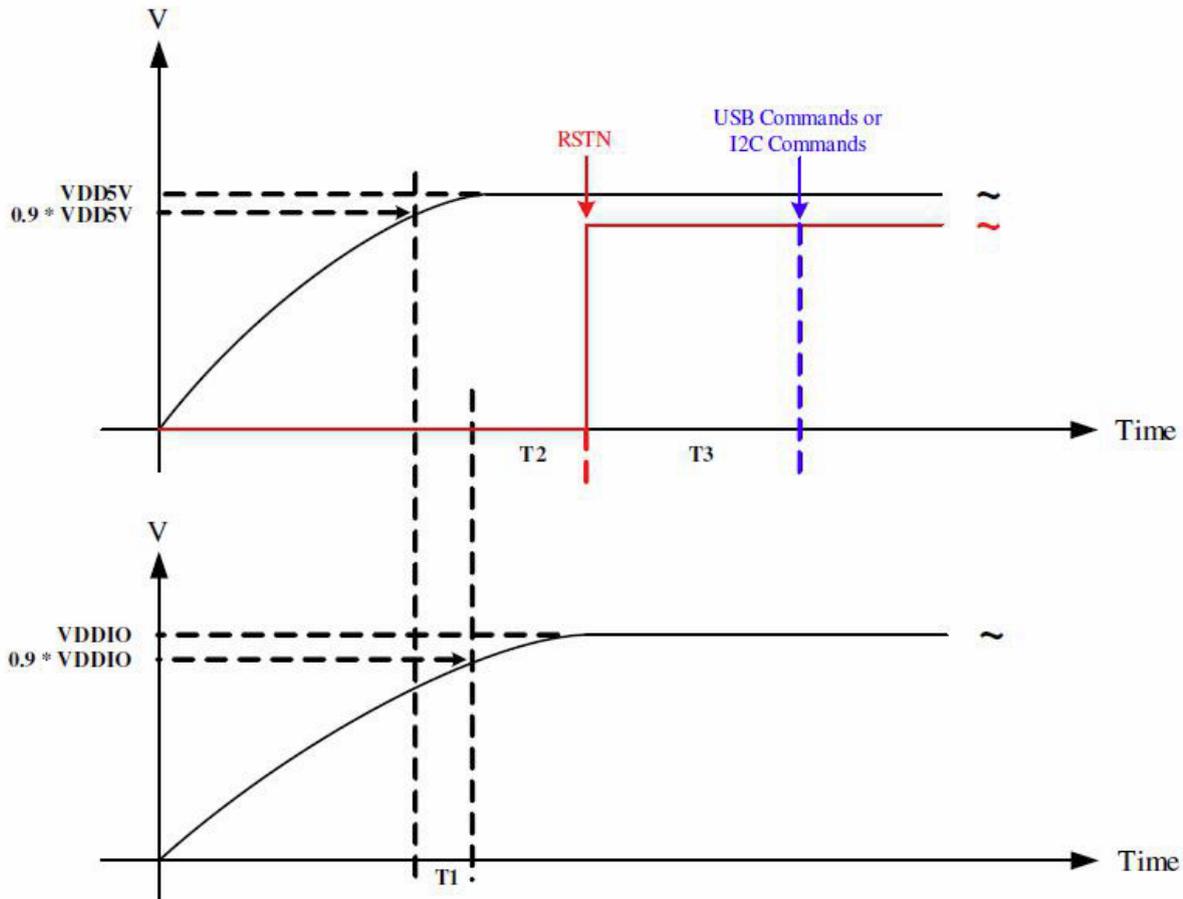

1. T1: The time difference between  $0.9 * VDD$  and  $0.9 * VDDIO$ . T1 must be  $\geq 0$  sec.
2. T2: The time difference between  $0.9 * VDDIO$  and RSTN. T2 must be  $\geq 200$  us.
3. T3: The time difference between RSTN and Commands.  
 T3 in case of USB must be  $\geq 20$ ms.  
 T3 in case of I2C must be  $\geq 300$ ms.

## 6.7 Power-off to Power-On Sequence

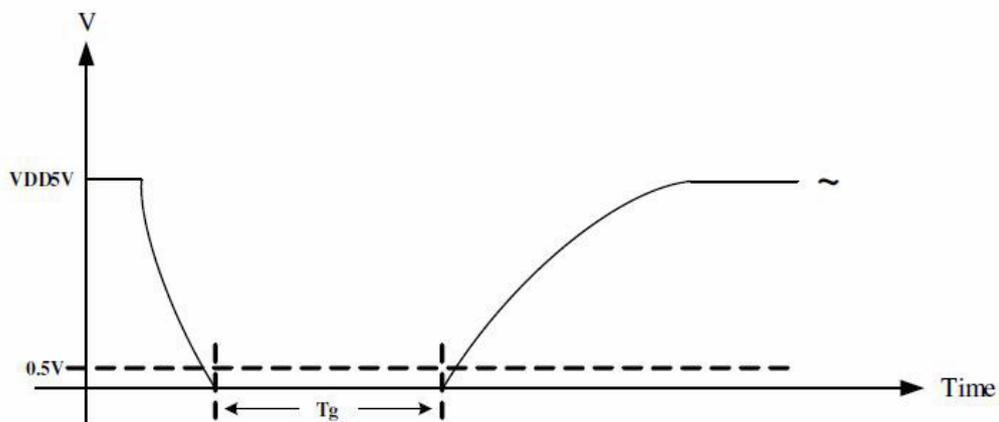

*Tg: The time difference between power-off and power-on. Tg must be  $> 10$ us.*

*Note: During the power off time, the VDD5V must be lower than 0.5V to make sure the touch controller has been correctly reset.*

## 7. Quality Inspection Standards

For TFT quality inspection standards, please see the following link: <https://focuslcds.com/tft-quality-inspection-standards/>

## 8. Cautions and Handling Precautions

### 8.1 Handling and Operating the Module

1. When the module is assembled, it should be attached to the system firmly. Do not warp or twist the module during assembly work.
2. Protect the module from physical shock or any force. In addition to damage, this may cause improper operation or damage to the module and back-light unit.
3. Note that polarizer is very fragile and could be easily damaged. Do not press or scratch the surface.
4. Do not allow drops of water or chemicals to remain on the display surface. If you have the droplets for a long time, staining and discoloration may occur.
5. If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.
6. The desirable cleaners are water, IPA (Isopropyl Alcohol) or Hexane. Do not use ketene type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might cause permanent damage to the polarizer due to chemical reaction.
7. If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, legs, or clothes, it must be washed away thoroughly with soap.
8. Protect the module from static; it may cause damage to the CMOSICs.
9. Use fingerstalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
10. Do not disassemble the module.
11. Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
12. Pins of I/F connector shall not be touched directly with bare hands.
13. Do not connect, disconnect the module in the "Power ON" condition.
14. Power supply should always be turned on/off by the item Power On Sequence & Power Off Sequence.

### 8.2 Storage and Transportation.

1. Do not leave the panel in high temperature, and high humidity for a long time. It is highly recommended to store the module with temperature from 0 to 35 °C and relative humidity of less than 70%
2. Do not store the TFT-LCD module in direct sunlight.
3. The module shall be stored in a dark place. When storing the modules for a long time, be sure to adopt effective measures for protecting the modules from strong ultraviolet radiation, sunlight, or fluorescent light.
4. It is recommended that the modules should be stored under a condition where no condensation is allowed. Formation of dewdrops may cause an abnormal operation or a failure of the module. In particular, the greatest possible care should be taken to prevent any module from being operated where condensation has occurred inside.
5. This panel has its circuitry FPC on the bottom side and should be handled carefully in order not to be stressed.